




The Intelligent Systems



PANEL PC Product Selection Guide

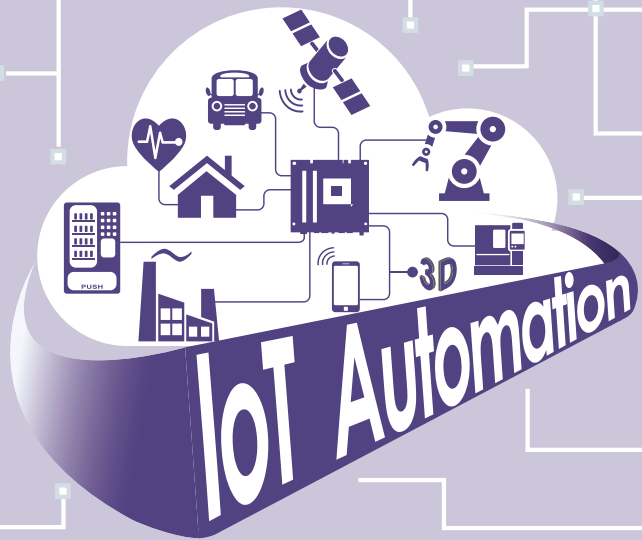

The Complete Panel PC Solution Provider

Contents

About NEXCOM	03	APPC1940T	64
NEXCOM's Specialties in Panel PC Solutions		Human Machine Interface	
Industrial Panel PCs Meet Your Specific Operation Needs	06	eLITE610	66
Retail Panel PC Solution Optimizes Store Efficiency	08	eSMART04N	68
NEXCOM Outdoor Open Frame Panel PCs Offer Flexible Reliability to Customized Applications	10	eSMART07N	70
Transport Infotainment Panel PC & Display Maximizes Passenger Convenience	12	eSMART10N	72
Marine Panel PC	14	Kiosk Panel PC	
		KPPC 1812	74
Selection Guide		KPPC 1057	76
Industrial Panel PC	16	KPPC 1514	78
Industrial Touch Monitor	17	KPPC 1814	80
Applied Panel PC	18	KPPC 2114	82
HMI	20	Point-of-Sales (POS)	
Teach Pendant	22	NPT 1560	84
Kiosk Panel PC	23	NPT 1562	86
POS	26	NPT 5850	88
Open Frame Panel PC	27	NPT 5852	90
Transport Infotainment Panel PC & Display	30	NPD 1050	92
Marine Panel PC	31	Open Frame Panel PC	
		OPPC 1240T	94
Industrial Panel PC & Display		OPPC 1540T	96
IPPC1560TE (UL508 / C1D2)	32	OPPC 1540T-J1900	98
IPPCA1570T	34	OPPC 1740T	100
IPPCA1770T	36	OPCC 1940T	102
IPPCA1970T	38	OPPC 1940T-J1900	104
IPPC1670P	40	OPPC 1540HT-J1900	106
IPPC2170P	42	OPPC 1940HT-J1900	108
IPPC1640P	44	Transport Infotainment Panel PC & Display	
IPPC2140P	46	TPPC 2210	110
IPPD1600P	48	TPPD 2200	112
IPPD1800P	50	Marine Panel PC	
IPPD2100P	52	(M)PPC-080T-BT-01	114
		(M)PPC-120T-BT-0102	116
Applied Panel PC		(M)PPC-240T-HW-01	118
APPC0840T	54		
APPC1240T	56		
APPC1245T	58		
APPC1540T	60		
APPC1740T	62		

About NEXCOM

Reliable Partner for the Intelligent Solutions

Founded in 1992 and headquartered in Taipei, Taiwan, NEXCOM is committed to being your trustworthy partner in building the intelligent solutions. To surpass customers' expectations, NEXCOM makes the difference by utilizing its decades of industrial computing experience, a highly talented R&D team, and by providing exceptional levels of customer service. With these core strengths, NEXCOM has enabled its customers to win key projects in a diverse range of industries.

With its focus on delivering these core values to better serve customers, NEXCOM integrates its capabilities and operates six global businesses, which are IoT Automation Solutions (IAS), Intelligent Digital Security (IDS), Internet of Things (IoT), Intelligent Platform & Services (IPS), Mobile Computing Solutions (MCS), and Network and Communication Solutions (NCS). This strategic deployment enables NEXCOM to offer time-to-market,

time-to-solution products and service without compromising cost.

In addition, the service-to-market business model gives NEXCOM core competence to build a strong world-class service network by providing customized service, global logistics, local access, and real-time support. Operating six subsidiaries, from China, Italy, Japan, Taiwan, the United States, to the United Kingdom, NEXCOM is able to better facilitate customers' requirements as well as closely work with global partners in different regions.

Partners should also be assured that NEXCOM's Taiwan based Headquarters and subsidiary offices in China, UK and USA have obtained ISO 9001:2008 Certification.



IAS	iAutomation: Industry 4.0 Solution, industrial robot & motion, industrial network, DMS 4.0
IDS	Intelligent Digital Security: IP Cam, NVR, mobile server platform
IoT	Internet of Things: total solutions for vertical IoT applications Healthcare and Medical Informatics: total solutions with a variety of medical IT systems
IPS	Intelligent Platform & Services: smart retail, digital signage, interactive kiosk, customization services
MCS	Mobile Computing Solutions: rugged computer devices, rugged mobile computer Vehicle Telematics Computer: Car PC, heavy duty vehicle, train PC
NCS	Network and Communication Solutions : network security, HPC, telecommunication, storage, SDN/NFV, industrial security

Corporate Vision

To become the industrial leader in providing intelligent solutions, NEXCOM utilizes its industry leading technology, localized customer support and worldwide logistics services. This will be achieved by:

- Great team work
- Cooperation with trusted partners
- Growth through innovation

Corporate Mission

- An innovative supplier in vertical application markets
- A quality partner in engineering, manufacturing and services

Business Strategy

Aim to better support the activities of all its partners, NEXCOM divides its sales force into six dedicated business units to target rapidly expanding vertical markets. This enhances each business unit concentrating on strategic channel accounts and on repeat order business. Moreover, NEXCOM's business units have been set up to serve the requirements of key project accounts, where product ODM and project support are frequently required.

NEXCOM is working with embedded computing solution providers to envision new opportunities for growth. We'll help you deliver reliable vertical solutions, optimized for the next wave of IoT and Industry 4.0 solutions.

NEXCOM's Specialties in Panel PC Solutions

NEXCOM's Panel PC product portfolio covers Industrial Panel PC/Monitor (IPPC/IPPD), Applied Panel PC/Monitor (APPC/APPD), Human Machine Interface (HMI), Kiosk Panel PC (KPPC), Point-of-Sales (POS), Open Frame Panel PC (OPPC), Transport Infotainment Panel PC (TPPC) and Marine Panel PC (MPPC). They are designed to comply with the particular requirements of different operating environments.

- The IPPC series is a heavy-duty, vibration-resistant, rugged, aluminum chassis industrial computer for harsh environments.
- The APPC series are all-in-one compact industrial-grade machinery computers suitable for industrial automation applications.
- The HMI series is the ideal choice for demanding HMI applications including factory floor machines, process control and building automation.
- The KPPC series is designed for digital signage, self-service and kiosk applications.
- The POS solution features high performance, green technology and OEM/ODM reliability that ensure the success of customer's investment.
- The OPPC series are slim open frame Panel PCs aimed at vertical market segments including kiosks, ATMs and vending machines.
- The TPPC series enhances efficiency and the passenger travel experience and allows our customers to use solution ready platforms for passenger entertainment and infotainment in public transport systems.
- The MPPC series delivers reliable performance even when challenged by environmental conditions at sea and are ideal for fishing vessels, leisure craft, merchant marine, workboats, and sailing yachts.

Industrial Panel PC & Display (IPPC/IPPD)


NEXCOM heavy Industrial Panel PCs (IPPC) are equipped with powerful Intel® Processors, TFT LCD Panels with LED backlights, and user-friendly touch design. NEXCOM Industrial Panel PCs provide expansion slots for add-on boards in a NEMA4/ IP66 heavy-duty aluminum front bezel. Its rugged aluminum chassis is vibration resistant and suitable for any harsh industrial environment. NEXCOM heavy Industrial Touch Monitors (IPPD) share an identical appearance to the IPPC series for the same harsh industrial environment applications.

Applied Panel PC & Display (APPC/APPD)

NEXCOM fanless Panel PCs adopt an all-in-one concept that integrates a single board computer, TFT LCD Panel with LED backlight, and user-friendly touch screen within a sleek and compact NEMA4 / IP65 chassis. Designed to serve as a flexible and reliable industrial computing platform, each Panel PC and Monitor is a compact, highly integrated, network-ready computer with exceptional I/O connectivity. The industrial-grade machinery computer from NEXCOM is designed for use in any light industrial environment.

Human Machine Interface (HMI)

NEXCOM offers a full line of IP66 certified Human Machine Interface (HMI) LCD front panels in sizes from 4.3" to 15". They are the ideal choice for demanding HMI applications including factory, marine and building/home automation. The JMobile software has more than 200 communication drivers, allowing you to connect them to a wide variety of control devices to support PLC applications and improve the efficiency of machine manufacturing.

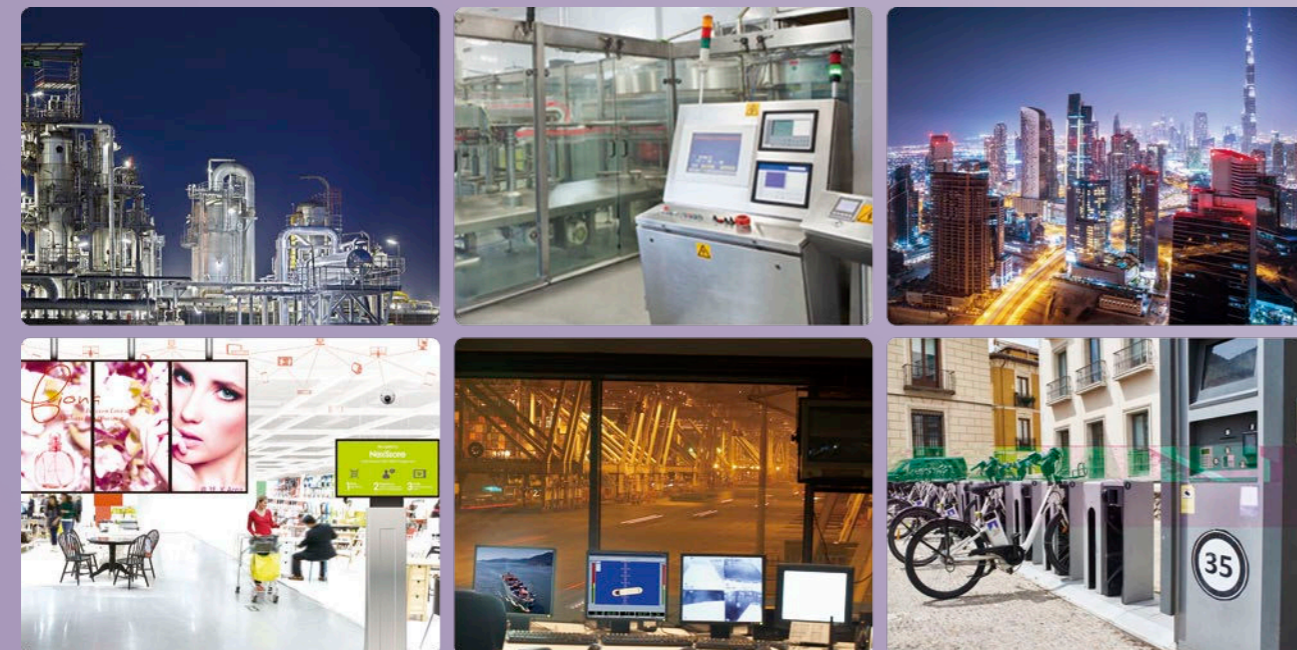

Kiosk Panel PC (KPPC)

NEXCOM Kiosk Panel PCs (KPPC) are a multi-function powerful solution for various self-service markets from signage, kiosk to gaming applications, featuring modularized, user-friendly design and OEM/ODM reliability. The KPPCs feature high integration of kits and peripherals ranging from MSR finger printer, thermal printer, and NFC reader.

Point-of-Sales (POS)

NexPOS, (NEXCOM Point-of-Sales (POS)), features high performance, green technology and OEM/ODM reliability that ensure the success of the customer's investment. It also offers reliable and flexible touch monitors that can integrate into other peripherals. The features of the NexPOS POS terminals include IP65 front panel projection, PCT touch, removable HDDs, second display deployment, bezel free, and fanless design to meet a diverse range of demands. Furthermore, some NexPOS POS terminals also provide VESA or wall mounting for a wide range of installation options.

Open Frame Panel PC (OPPC)

NEXCOM Open Frame Panel PCs (OPPC) with bezel-less display provide limitless design flexibility. For flexible mounting options, customers are provided with various innovative mounting options, such as open frame mount from both rear and front sides. The Open Frame Panel PC has an ultra slim appearance and can be easily integrated into a custom enclosure. Ideal for space-critical environments, Open Frame Panel PCs are targeted

at vertical market segments, such as ATMs, price checkers, self-service-check-in, ticket vending machines, healthcare kiosks, and more.

Transport Infotainment Panel PC & Display (TPPC / TPPD)

NEXCOM all-in-one Transport infotainment panel PCs are useful to enrich passengers' transportation experience. Catering to a fast growing demand for reliable, market-proven digital signage solutions for transport infotainment applications including train stations, airports, bus terminals and vehicles, NEXCOM runs dedicated teams of engineers from mechanical designers, software programming to technical support to seamlessly serve the industry. They also have a rugged fanless design supporting wide power input and video over Ethernet extender of up to 8 displays.

Marine Panel PC (MPPC)

NEXCOM provides robust and reliable marine panel PCs (MPPC) for customers and partners, including high performance fanless computers, various sizes of applied panel PCs and displays with low power consumption and deliver a reliable, durable, high-performance platform of wide versatility for use in maritime and offshore environments. Certified marine panel PCs are ideal for severe environments, and can be used in fishing and container vessels, leisure craft, workboats, sailing yachts, etc. All marine solutions are built and tested according to critical IEC-60945 industrial standard to ensure compliance.

Product Series	Product Features
 <p>IPPC / IPPD Series Industrial Panel PC & Display</p>	<ul style="list-style-type: none"> • 16:9 / 4:3, 15"~21" fanless panel computer • Metal housing with robust aluminum front bezel for harsh environments • IP65 compliant front panel • Supports: fieldbus module, JMobile HMI and CODESYS SoftLogic (optional)
 <p>APPC / APPD Series Industrial Panel PC & Display</p>	<ul style="list-style-type: none"> • 4:3 8"~15" SVGA fanless LED panel computer/display • Flush Panel by 5-wire Touch Screen • Flexible mounting, Panel/ VESA/ Wall/ Stand/ 100x100mm • IP65 compliant front panel • Supports: fieldbus module, JMobile HMI and CODESYS SoftLogic(optional)
 <p>HMI Series Human Machine Interface</p>	<ul style="list-style-type: none"> • 4:3 3"~15" LED backlight color display • Resistive touchscreen • 1 x RS232/422/485 communication port • IP66 compliant front panel
 <p>KPPC Series Kiosk Panel PC</p>	<ul style="list-style-type: none"> • Wide range of processor options and display dimensions • Accurate 10 point projective capacitive touch displays • Ease-of-Service design • Part-and-full customization • High-integration of kits and peripherals
 <p>POS Series Point-of-Sales</p>	<ul style="list-style-type: none"> • Supports 3rd Gen Intel® Core™ processor family • Dust filter for ease of maintenance • IP65 compliant front panel • Removable HDD • Integrated stand/ power transformer • MSR/fingerprint/VFD kit (option)
 <p>OPPC Series Open Frame Panel PC & Display</p>	<ul style="list-style-type: none"> • Wide range of display dimensions • Fanless/ low noise design • Part- and full-customization flexible mounting, Panel/ VESA/ 100x100/ Wall/ Stand • Wide power input of 12~30VDC
 <p>TPPC / TPPD Series Transport Infotainment Panel PC & Display</p>	<ul style="list-style-type: none"> • 16:9 front bezel compliant with IP54 • Wide power input of 12~36VDC • Video over Ethernet extender (HDBaseT) • Supports W-Fi, GPS, and 3G
 <p>MPPC Series Marine Panel PC</p>	<ul style="list-style-type: none"> • 8"~24" 16:9 ratio full HD marine panel computer • PCAP touch screen with AR coating • IP65 compliant front panel • Built in 24VDC power input • Mounting support : flush/ VESA • IEC-60945 maritime standards compliance

Industrial Panel PCs Meet Your Specific Operation Needs

NEXCOM's industrial-grade control panel products are a specialized all-in-one (AIO) panel computer, ideal for a wide range of automation applications in different vertical markets that require reliable efficient operation. NEXCOM offers Industrial Panel PCs (IPPC) for harsh environments, Applied Panel PCs (APPC) for light industries, ARM-based HMIs (eTOP, eSMART and eLITE) for industrial as well as building/home automation, and industrial-grade interactive touch monitors (IPPD and APPD) for demanding touch applications. NEXCOM also provides panel PCs with C1D2 certification (IPPC 1560TE) for oil and gas industries, and panel PCs with sunlight-readable displays, multi-touch input, 7H hardness anti-scratch P-Cap touch screens, 16:9 widescreens, and optical bonding to meet the needs of different industries.

Control Panel PC solutions include pluggable industrial master fieldbus interfaces of widely-used protocols communicate with programmable logic controllers (PLC) and remote I/Os. Software-bundled PPC solutions are also available to offer total solutions that deliver robust integration and performance.

Industrial Panel PC (IPPC)

IPPCs are designed with 15" ~ 21.5" displays, 4:3 or 16:9 ratios, with 5 wire resistive touch or Multi-Point Projected capacitive touch, Intel Core i high performance, robustness, multiple expansion slots for add-on boards in a NEMA4/ IP66 heavy-duty aluminum front bezel, and vibration-resistance.

- 4:3 Intel® Core™ i resistive touch: IPPC A1570T/IPPC A1770T/IPPC A1970T
- 16:9 Intel® Core™ i P-Cap touch: IPPC 1670P/IPPC 2170P
- 16:9 Intel® Atom™ P-Cap touch: IPPC 1640P/IPPC 2140P

Applied Panel PCs (APPC)

NEXCOM fanless Panel PC adopts an all-in-one concept that integrates a single board computer, TFT LCD Panel with LED backlight, and user-friendly touch screen within a sleek and compact NEMA 4 / IP65 chassis. Designed to serve as a flexible and reliable industrial computing platform, each Panel PC and Monitor is a compact, highly integrated, network-ready computer with exceptional I/O connectivity. The industrial-grade machinery computer from NEXCOM is designed for use in any light industrial environments.

APPCs are designed with 8" ~ 19" displays, a 4:3 ratio, 5 wire resistive touch, cost-effectiveness, Intel Atom PC based low power consuming CPU, compact, high level of integration, network-readiness, and exceptional I/O connectivity.

- APPC 0840T/APPC 1240T/APPC 1540T/APPC 1740T/APPC 1940T

Applied Touch Monitor (APPD) & Industrial Touch Monitor (IPPD)

APPDs and IPPDs are display monitors with an APPC and IPPC's front touch LCD Panel design, and shock and vibration resistance for their specific vertical markets.

- 4:3 resistive touch: APPD 1200T/APPD 1500T/APPD 1700T/APPD 1900T
- 16:9 P-Cap touch: IPPD 1600P/IPPD 1800P/ IPPD 2100P

Human Machine Interface (HMI)

NEXCOM offers a full line of HMIs (Human Machine Interface) with IP66 certified LCD front panels in sizes from 4.3" to 15" with an HMI/ SCADA software (JMobile) bundle to be controlled and monitored remotely by mobile devices. The JMobile software has more than 200 communication drivers, allowing you to connect to a wide variety of control devices to support PLC applications and improve the efficiency of machine manufacturing.

- Intel® Atom™ cost-effective Plastic case eLITE610
- ARM Based cost-effective Plastic case eSMART04N/eSMART07N/eSMART10N
- ARM Based heavy environment aluminum case eTOP504~eTOP515

Application

Oil and Gas

Key Feature: C1D2 ISA 12.12.01, CSA22.2 No.213 certification



Robotic

Key Feature: EtherCAT master



CNC Machine

Key Feature: x86 High Performance HMI




HMI

Key Feature: Cost-effective ARM-based HMI



NEXCOM brings one-stop shopping choices

As the value of the IoT is derived from a wide range of applications, NEXCOM brings a wide range of panel PC products to fulfill different applications covering Industrial panel computers and Industrial Displays. Fanless Panel Computers, available in either Capacitive Multi-Touch mode or Single-Touch Resistive mode, are supported in the IPPC 4:3 series. This brings more flexibility. For smart city applications, the APPCs (Fanless Panel Computer) with IEC60950 EMC compliance are recommended. For applications which require greater noise reduction such as Machine or Factory Automation, EN 61000-4-2 & EN 61000-4-4 compliant IPPCs (Fanless Panel Computer) are recommended. Thus, NEXCOM panel PCs are tailored to meet your requirements.

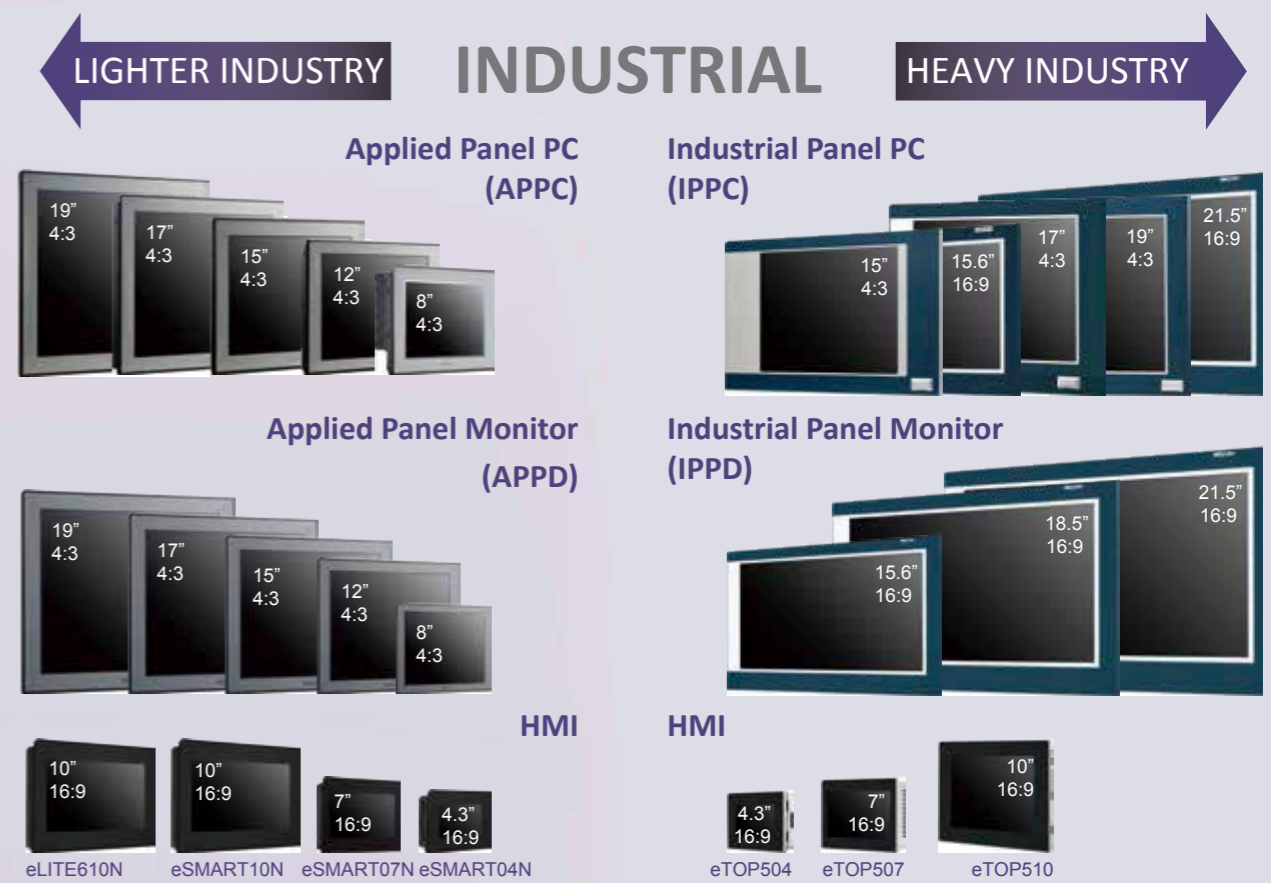

Retail Panel PC Solution Optimizes Store Efficiency

Connected devices aren't just changing the way consumers live, work and play—they're dramatically reshaping entire industries. Adding more intelligence and more connectivity to the objects that surround us will produce enormous amounts of data that companies can leverage to improve their operations, serve customers better, and create entirely new ways of doing business. The Internet of Things presents an opportunity for retailers to develop a vastly improved ecosystem that connects physical and digital worlds, allowing bidirectional, real-time interaction with consumers both inside and outside the store.

Many people prefer self-service to waiting in line or traveling out of their way—especially when they're in a hurry or on the go. According to a global research report, the global market for self-service technologies will grow with a compound annual growth rate (CAGR) of 8.9% for the period of 2016-2021. NEXCOM interactive kiosk solutions and smart shelf displays (KPPC & OPPC series) can help you deliver services more efficiently, increase customer interaction and motivate visitors to take action without sacrificing security or reliability. These intelligent Panel PCs can help you create greater customer interaction by sharing compelling messages and providing easy access to your products and services. Placing Interactive kiosks in high-traffic areas gives you more flexibility to create better business results.

The internet-enabled kiosk can provide customers copious information and self-services. By scanning a product barcode, the kiosk can tell customers about product details including sizes,

colors, prices, promotions, and stocks. If an item of a specific size or color is out of stock, customers can use the kiosk's touchscreen to make a purchase online with a credit card, earn reward points for the purchase with a membership card, opt for either in-store pickup or home delivery, and obtain a confirmation receipt as a proof of payment. The kiosk also gives customers access to the full product range as offered on the retailer's online store, expanding the product coverage to hundreds of thousands of brands within existing floor space. The in-store interactive kiosk helps the department store chain increase customer engagement, reduce out-of-stock complains, broaden product offerings, and more importantly, drive sales.

Successful Factors



Kiosks and Interactive Panel PCs enable organizations to provide better services and shorten waiting times, especially in customer-service oriented retail industries. NEXCOM OPPCs come with display sizes of 12.1" to 19", and feature an ultra slim mechanism and multiple mounting options which minimize space and enable installation in almost any location, including retail outlets, supermarkets, train stations and airports. The touch screen enhances user interaction to offer improved customer service. The user experience is further enhanced by the KPPC/OPPC series ability to stream dynamic interactive content.

Whilst many products in the market only adhere to the VESA mounting standard, NEXCOM OPPCs can also be mounted on a wall and panel, providing users with another mounting option, especially for space critical applications. Moreover, since they're equipped with a touch screen Panel PC, it enhances and streamlines the interactions with users, such as check-in kiosks in train stations, airports and entertainment venues.

NEXCOM Kiosk Panel PCs (KPPC) are a multi-function powerful

solution for various self-service markets from signage, kiosk to gaming applications, featuring modularized, user-friendly design and OEM/ODM reliability. The KPPCs feature high integration of kits and peripherals ranging from MSR finger printer, thermal printer, and NFC reader. The KPPC series enable the simultaneous running of rich multimedia content.

Equipped with an abundance of I/O interfaces that meet the requirements of the current retail application market, NEXCOM OPPCs and KPPCs provide expansion flexibility for controlling subsystems. In addition, an easy access storage drive bay is specifically designed for quick installation.

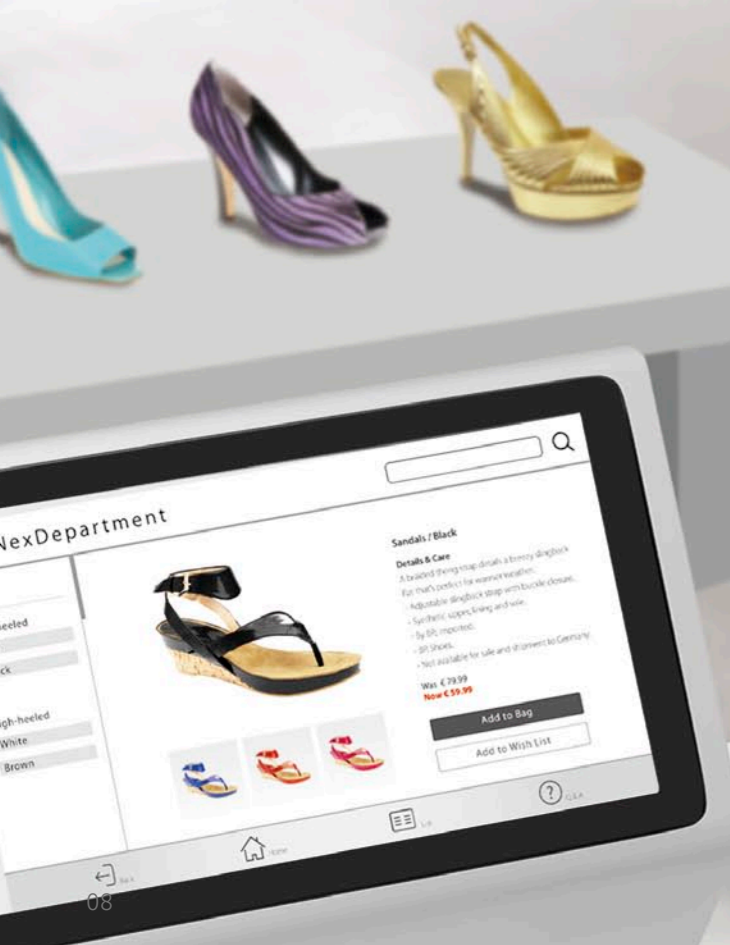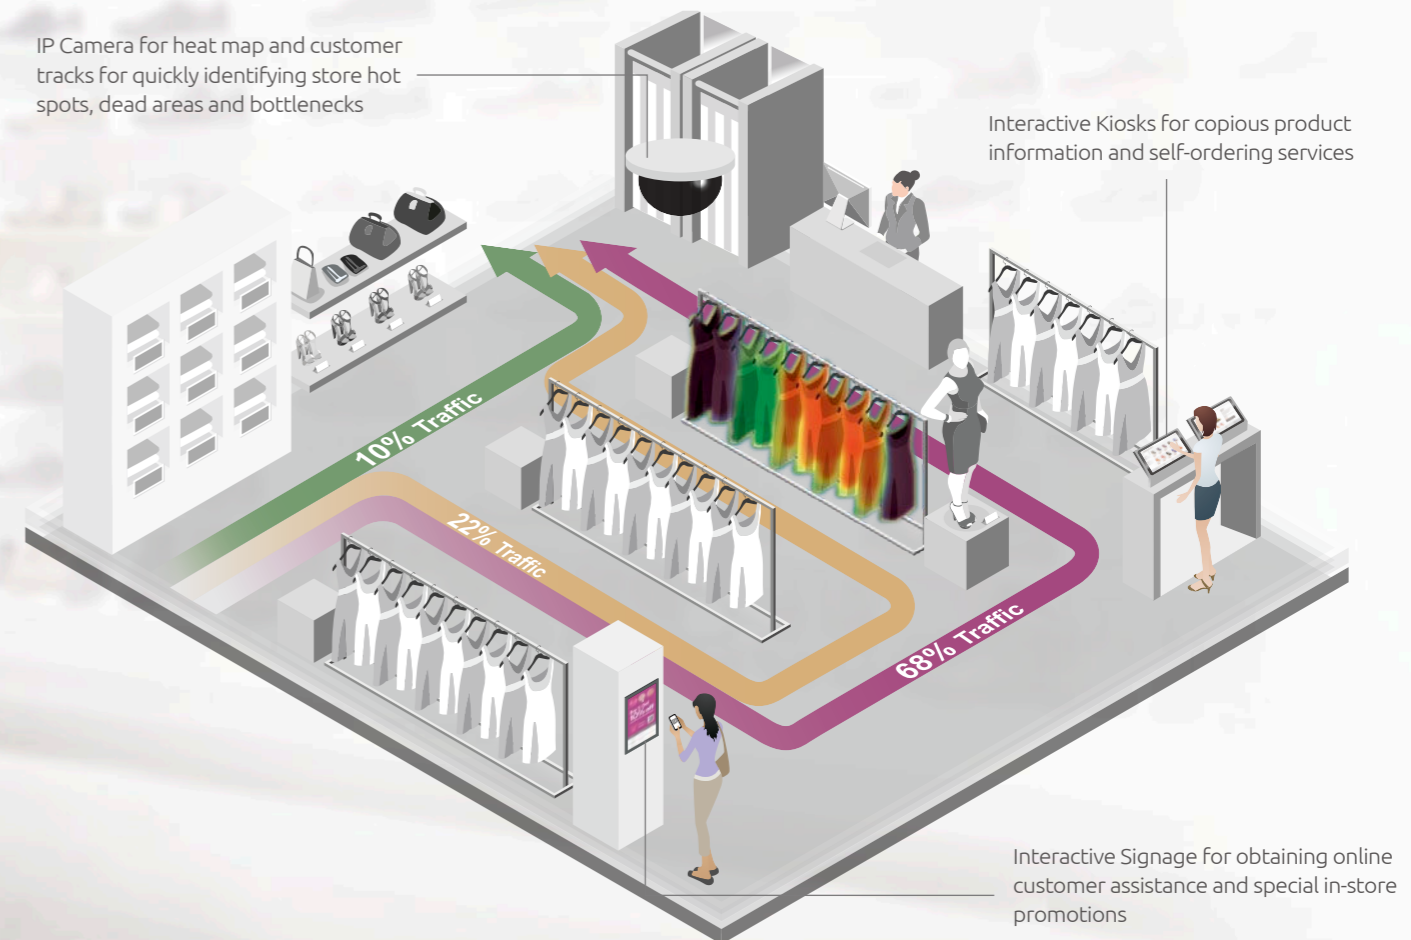

Main Features

Kiosk Panel PC (KPPC)

- Wide range of processor options with fanless design
- 4:3/16:9 screen ratio as infotainment terminal
- P-CAP multi-touch screen
- Stylish and slim enclosure design
- Front IP65 compliant design to prevent water and dust
- Dual GbE LAN for better network management
- Embedded 2MB front camera (optional)

Open Frame Panel PC (OPPC)

- 4:3 fanless LED panel computer
- Wide range of processor options with fanless design
- High brightness option for outdoor/semi-outdoor applications
- Rich I/O for various peripheral devices
- Remote power switch
- Mounting support: panel/wall stand/VESA 100mm x 100mm
- Wide range power input 12~30VDC

NEXCOM Outdoor Open Frame Panel PCs Offer Flexible Reliability to Customized Applications

NEXCOM's outdoor Open Frame Panel PC (OPPC) series offer unprecedented flexibility and allow the configuration of many applications and integration into any custom product design. The NEXCOM OPPC series help build customized branding and bring industrial grade reliability into various outdoor retailing and hospitality applications, especially in self-service kiosks, vending machines, ATMs, and electric car charging stations.


The outdoor OPPC series feature a slim open frame design, long MTBF, up to 1,000nits brightness, and low power consumption. Built for space-critical environments, long operation & lighting conditions, and low maintenance, the OPPC series unique flexible design satisfies the needs of harsh semi-outdoor and outdoor environments.

Successful Factors

NEXCOM outdoor Open Frame Panel PC (OPPC) series' bezel-free touch display design provides flexibility for customers to design the front bezel according to their application requirements. The slim open frame design enables the OPPC series to be easily fitted with an enclosure or an end system that is highly customizable for branding. The seamless bezel design also reduces space, making the OPPC series ideal for ATMs and kiosk type vending machines in transportation stations and entertainment venues.

The OPPC series has Full HD multimedia capability and up to SXGA resolution (1280x1024). The OPPC series supports a second display and is ideal for multifunctional kiosks providing, for example, self-service and advertising or other dual display applications.

NEXCOM outdoor Open Frame Panel PC (OPPC) series' bezel-free touch display design provides flexibility for customers to design the front bezel according to their application requirements.

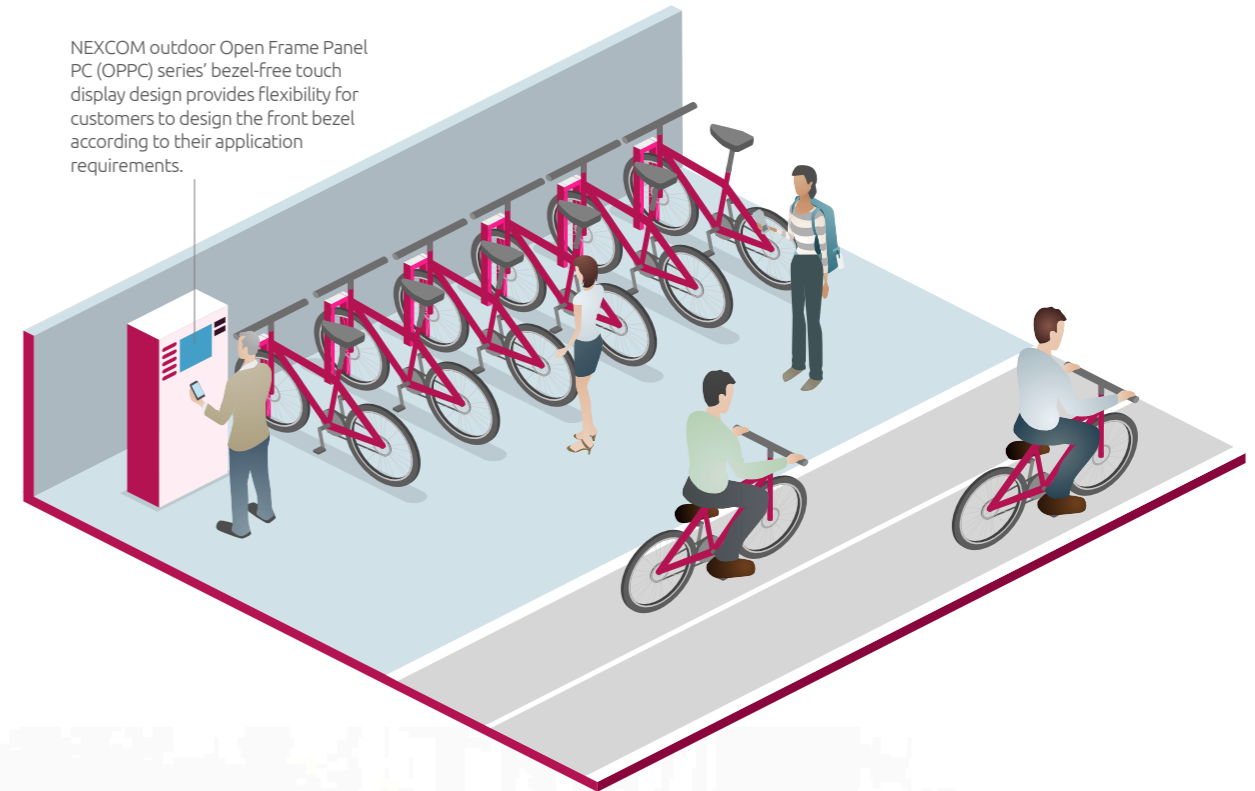

With up to 1000nits brightness, NEXCOM's Open Frame Panel PC (OPPC) series enhances the brightness of LCD so they are sunlight readable. Unlike other regular panel PCs, the OPPC series antiglare coating provides flawless imaging in any lighting conditions, including being viewed from any angle under direct sunlight.

To ensure a high level of reliability and an increased lifespan, the OPPC series incorporate an industrial motherboard and an industrial LED touch panel, both of which have low power consumption and an above-average mean time between failures (MTBF) of 50,000 hours. To increase overall system reliability and prevent dust ingress, the OPPC series feature a fanless design. The OPPC series also provides optional isolation protection on COM ports to prevent dust accumulation and transient voltage surge. In short, the OPPC series delivers enhanced reliability and has a long lifespan.

Powered by Intel® Celeron™ J1900 processor, the OPPC series has five times the 3D graphics power and 80 percent higher decoding performance than previous generation processors. Improved graphics and media performance enable faster media conversions, stereoscopic 3D, immersive browsing, and enhanced HD video transcoding. Outdoor high brightness panel PC SKUs, with 15" and 19" displays, feature the same size cutout, which facilitate seamless migration from their predecessors yet offer enhanced performance.

To maximize compatibility and simplify maintenance, the OPPC series has an improved I/O connector layout including COM, Ethernet, power, and audio, making custom integration easy. Better yet, the OPPC series feature a fast USB 3.0 interface, providing 10 times faster data transfer than former USB 2.0, thus helping boost operational efficiency and customer satisfaction.

Main Features

- Slim, compact and front panel open frame design
- High brightness 1000 nits sku for semi outdoor applications
- Full HD multimedia capability of 4:3 SXGA/XGA fanless LED panel computer
- Wide range of processor options with fanless design
- Rich I/O for various peripheral devices
- Open frame/Panel/VESA/Wall mounting options make assembly and installation far easier
- Wide range power input 12~30VDC



Transport Infotainment Panel PC & Display Maximizes Passenger Convenience

In recent years, transport infotainment solutions are becoming more prevalent and are considered an effective tool to manage passengers' traffic flow. Not only can crucial information be delivered to passengers in real time, it also generates substantial advertising revenue for transport operators and advertising agencies.

At airports, train stations, bus stops, and in buses and trains, transport infotainment solutions improve the travel experience by serving a variety of functions including displaying arrival/departure timetables, service status, public announcements, and route-finding. To operators, centralized digital screens via a web interface effortlessly enable them to manage traffic within terminals and dynamically guide passengers to their destination. Moreover, with aid of the cutting-edge technology from graphics and Full HD, eye-catching displays help to attract audiences and boost advertising revenue.

Not limited to indoor uses, the transport infotainment solution also increases its presence in semi-outdoor locations. At bus stops, passenger information display systems (PIDS) not only display real-time information such as the bus schedule, but also serve as public bulletin boards to deliver public announcements and much more.

Successful Factors

In mission critical applications such as FIDS and PIDS, system reliability is the key to maintaining service consistency and reducing maintenance. NEXCOM's Transport Infotainment Panel

PC & Display (TPPC/TPPD) series is a ruggedly designed master Panel PC which can be extended to up to eight displays. It is a fully flexible modular system with solutions for different system environments and space requirements.

NEXCOM TPPC 2210T is a 21.5" 16:9 LCD with resolutions up to 1920 x 1080 (Full HD) and an industrial motherboard making it the perfect transport infotainment panel PC solution. The optional VESA mount Kit is designed for easy installation in almost any location. It is compliant with the E/e-Mark, in-vehicle industry standard.


By supporting Daisy Chain HDMI over Ethernet or HDBaseT technology, it allows multimedia signals using Cat5e/Cat6 cable to extend the TV display distance for a maximum run length of 60M and for a maximum of eight displays (TPPD 2200), making the whole system more flexible.

All variations use the same elegant aluminum frame, so mounting and installation are particularly easy. The low weight and low maintenance approach make sure the environmental impact and operating costs are kept to a minimum. Via a web interface over Wi-Fi, GPS, or 3G, the NEXCOM TPPC 2210T can display any information such as decided by the transport operator and media agencies when or where their message is to be displayed in an easy flexible way to ensure passengers have a safe and smooth journey. This includes next-stop information, detailed route information, a network map as well as operator information such as service interruptions. The TPPC 2210T can display all kinds of advertisements and can therefore be integrated into a business plan as an additional source of income.

Passenger information display systems (PIDS) present not only real-time information such as arrival schedule for passengers, but also serves as public bulletin boards to deliver public announcements.



Main Features

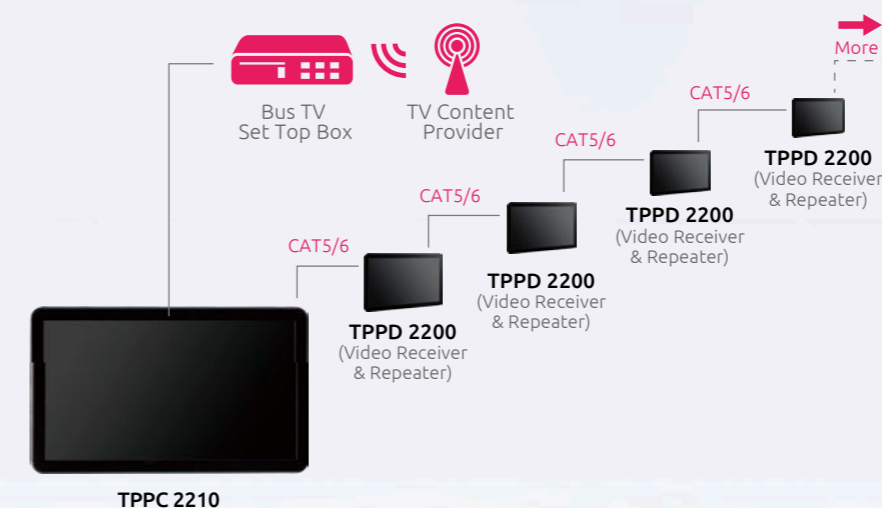

- Powered by Intel® Celeron® N2807 processor with fanless and low noise design
- Video over Ethernet extender (HDBaseT) supporting long-distance and daisy-chained multi-screen transmission (HDBaseT receiver from TPPD 2200)
- Power ignition on/off delay protection design
- Supports Wi-Fi, GPS and 3G for remote diagnostic or management
- Front bezel with IP54 compliance and vandal proof design
- Wide range input from 12~36VDC

Marine

To counter tough challenges on the rough sea, NEXCOM designed the essential system ruggedized and reliable. NEXCOM Marine Series feature durability and aesthetics, for using on the dock, in the control room, or on bridge.

Transformation

NEXCOM's high performance marine panel PC solutions are built with the powerful Intel® Core™ i5 / Intel® Atom™ E3845 CPUs with fanless system architecture. The certified marine computers featuring durability and aesthetics are ideal for severe environments, and can be applied to fishing and container vessels, recreational craft, workboats, sailing yachts for using on a dock, an open deck, in a control room, or on the bridge.




Key Features

- Wide range of low power consumption processors
- 8" to 24" 16:9 display dimensions
- Fanless and rugged design delivering a reliable, durable, high-performance platform
- Rich integrated I/O interface functions
- Wide (-25°C to 70°C) operating temperature range
- Part-and full-customization is offered
- Adheres to Det Norske Veritas (DNV), IACES-E10, and IEC specifications, ideal for the severe environments

IP65 Protection for Front Panels


The front panel adopts an IP65 certified flush panel design and offers a projected-capacitive, glove-friendly multi-touch screen for outdoor applications.

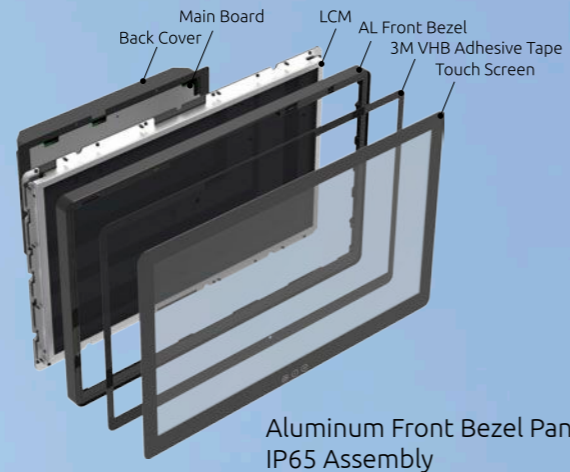

Aluminum Front Bezel Panel IP65 Assembly


Anti-Reflective (AR) Coatings for Touch Screen

Anti-Reflective (AR) coating treatment is added to reduce surface reflections designing to work in rugged, outdoor and marine use.

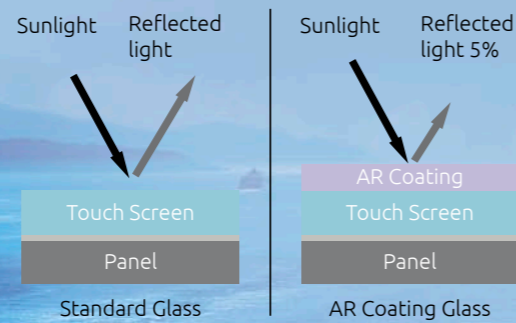


Dock's Control Room

The control room serves as a central space where a large physical facility or physically dispersed service can be monitored and controlled. Multiple electronic displays and control panels are usually present, and there may also be a large wall-sized display area visible from all locations within the space. NEXCOM Marine panel PCs can be installed in the dock's control room where it's used to display all the technical functions. Operators work at marine panel PCs to plot the loading and unloading of shipments and NEXCOM Marine panel PCs also can connect video surveillance and recording, for security and personnel accountability purposes.

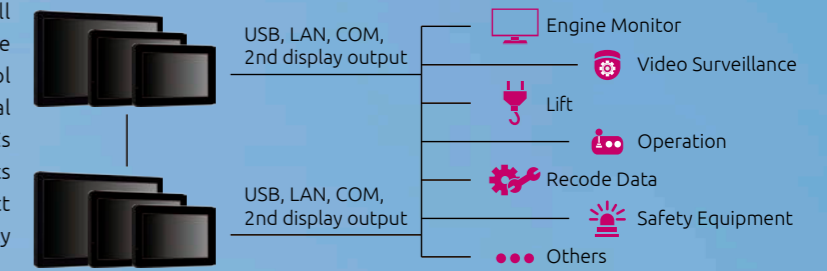


Engine Control Room

The engine control room is usually located on the main deck level of the ship. It has panel PCs installed in the engine control room for operations, and for work, planning, and safety meetings to monitor and control the ship's machinery throughout the vessel. NEXCOM Marine panel PCs have a multitude of I/O options including USB, LAN, COM, 2nd display output and 24VDC power input.

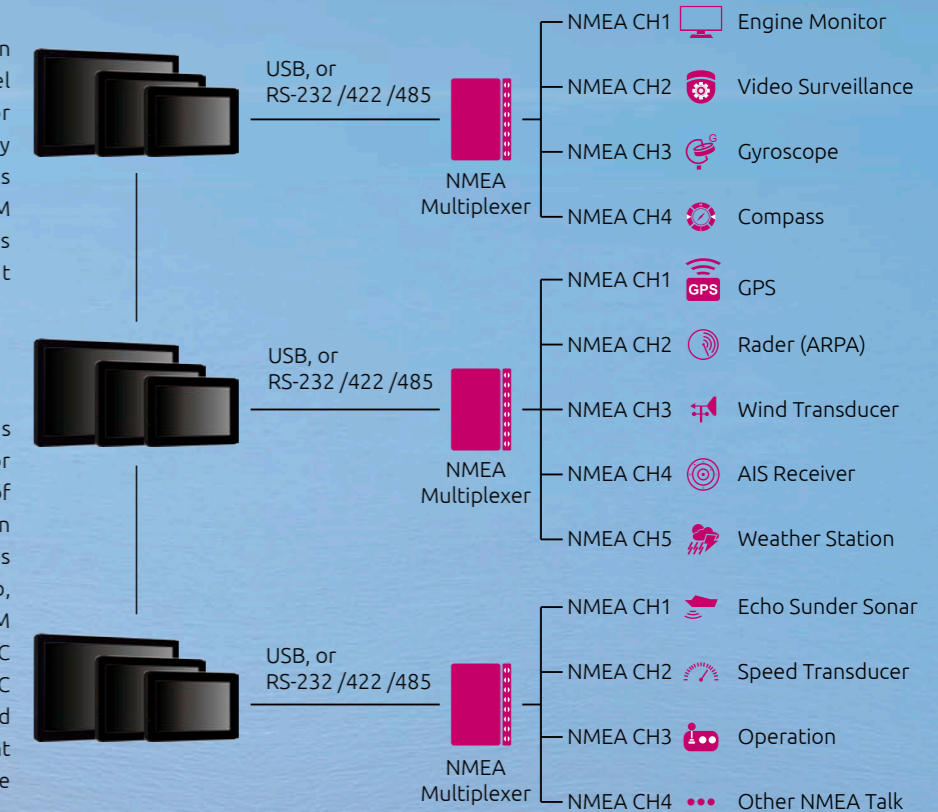





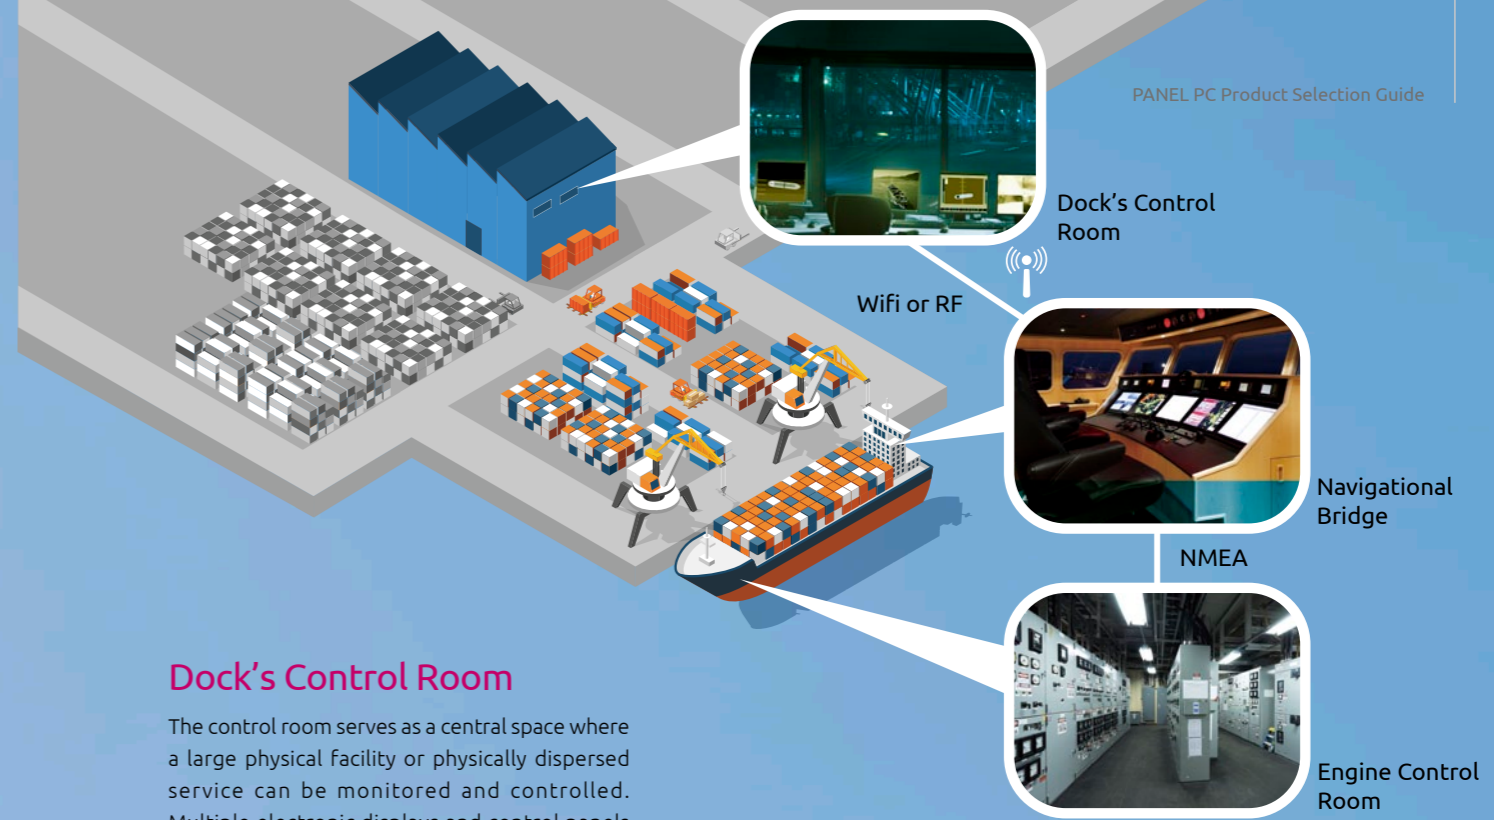

Navigational Bridge

A ship's bridge, or Navigation Bridge, holds a fantastic array of equipment. It is used for navigation, and is also the command center of the ship. NEXCOM Marine series computers can connect to various internal and external systems on the bridge, such as ECDIS, GPS, AIS, Gyro, Radar and Rudder Angle Indicator. NEXCOM Marine panel PCs are designed with a wide (-25°C to 70°C) temperature range, support 24VDC power input and come with a minimalistic and fanless enclosure designed, all being compliant with IEC 60945, IACS E10 and DNV maritime standards.








Industrial Panel PC

Model						
	IPPC 1640P	IPPC 1670P-DC	IPPC 2140P	IPPC 2170P-DC	IPPC 1560TE	IPPC A1570T-DC
LCD Size	15.6" 16:9	15.6" 16:9	21.5" 16:9	21.5" 16:9	15" 4:3	15" 4:3
Max. Resolution	WXGA, 1366 x 768	WXGA, 1366 x 768	Full HD, 1920 x 1080	Full HD, 1920 x 1080	XGA, 1024 x 768	XGA,1024 x 768
Luminance (cd/m2)	300	300	300	300	400	450
Contrast Ratio	500	500	5000	5000	700	800
Viewing Angle (H-V)	80(U), 80(D), 85(L), 85(R)	80(U), 80(D), 85(L), 85(R)	89(U), 89(D), 89(L), 89(R)	89(U), 89(D), 89(L), 89(R)	60(U), 80(D), 80(L), 80(R)	70 (U), 80 (D), 80 (L), 80 (R)
Backlight	LED	LED	LED	LED	LED	LED
LCD Color	16.7M	16.7M	16.7M	16.7M	16.2M	16.2M
Touch Screen	Ten Point P-Cap	Ten Point P-Cap	Ten Point P-Cap	Ten Point P-Cap	Resistive 5-wire	Resistive 5-wire
Touch Light Transmission	87%	87%	87%	87%	81%	81%
CPU	Intel® Celeron® J1900 Quad Core 2.0 GHz	4th Gen. Intel® Core™ i5/i3 LGA socket	Intel® Celeron® J1900 Quad Core 2.0 GHz	4th Gen. Intel® Core™ i5/i3 LGA socket	3rd Gen. Intel® Core™ i5 (i5-3610ME) 2 x 2.7GHz	4th Gen. Intel® Core™ i5/i3 LGA socket
Chipset	-	Intel® QM87	-	Intel® QM87	Intel® HM76	Intel® QM87
Memory	4GB DDR3L SO-DIMM module	Max. 8GB DDR3/DDR3L	4GB DDR3L SO-DIMM module	Max. 8GB DDR3/DDR3L	4GB DDR3 SO-DIMM module	Max. 8GB DDR3/DDR3L
CFast Socket	1	1	1	1	1	1
2nd Display Output	VGA	DVI-I + DP	VGA	DVI-I + DP	VGA	DVI-I + DP
PS2 KB/MS	1	1	1	1	2	1
Ethernet(10/100/1000)	2	2	2	2	2	2
Line-out	1	1	1	1	-	1
Line-in	-	1	-	1	-	1
Mic-in	-	1	-	1	-	1
USB2.0/3.0	2/1	1(In front)/4	2/1	1(In front)/4	4(Hidden)/-	1(In front)/4
COM port	Isolation 2 x RS232,422,485	2 x RS232,422,485	Isolation 2 x RS232,422,485	2 x RS232,422,485	Isolation 2 x RS232,422,485/ 1 x RS232	2 x RS232,422,485
Power Switch	1	1	1	1	1	1
Remote Power Switch	1	1	1	1	-	1
Reset Button	1	1	1	1	1	1
Power Jack	Terminal Blocks 3-Pin Phoenix Connector	Terminal Blocks 3-Pin Phoenix Connector	Terminal Blocks 3-Pin Phoenix Connector	Terminal Blocks 3-Pin Phoenix Connector	Terminal Blocks 3-Pin Phoenix Connector	Terminal Blocks 3-Pin Phoenix Connector
GPIO	-	-	-	-	-	-
Digital I/O	-	-	-	-	-	-
Expansion	2 x mini-PCIe	2 x mini-PCIe/ 2 x PCI or PCIe slots	2 x mini-PCIe	2 x mini-PCIe/ 2 x PCI or PCIe slots	2 x mini-PCIe/ 2 x PCI or PCIe slots	2 x mini-PCIe/ 2 x PCI or PCIe slots
Construction Front Panel	Aluminum Front Zero Bezel	Aluminum Front Bezel	Aluminum Front Zero Bezel	Aluminum Front Bezel	Aluminum Front Bezel	Aluminum Front Bezel
Mounting	Panel/Wall/ Stand/VESA 100 x 100mm	Panel/Wall/ Stand/VESA 100 x 100mm	Panel/Wall/ Stand/VESA 100 x 100mm	Panel/Wall/ Stand/VESA 100 x 100mm	Panel/Wall/ Stand/VESA 100 x 100mm	Panel/Wall/ Stand/VESA 100 x 100mm
Power Input	+12 ~ 30VDC	+12V ~ 30VDC	+12 ~ 30VDC	+12V ~ 30VDC	+24VDC ±20%; Fuse: 250V/10	+12V ~ 30VDC
Power Supply Adapter	Optional	Optional	Optional	Optional	Optional	Optional
Operating Temp.	-10°C to 60°C	-10°C to 50°C	-10°C to 60°C	-10°C to 50°C	-10°C to 50°C	-20°C to 50°C
Storage Temp.	-20°C to 75°C	-20°C to 75°C	-20°C to 75°C	-20°C to 75°C	-20°C to 75°C	-20°C to 75°C
Operating Humidity	10% ~ 90%, Non-condensing	10%~90% relative humidity, Non-condensing	10% ~ 90%, Non-condensing	10%~90% relative humidity, Non-condensing	10% ~ 90%, Non-condensing	10%~90% relative humidity, Non-condensing
IP Level	Front Frame IP66	Front Frame IP66	Front Frame IP66	Front Frame IP66	Front Frame IP65	Front Frame IP66
Cut Out Size (WxH)(mm)	401 x 296	398 x 293	547 x 367	544x364	455 x 295	382 x 312
Dimension (WxHxD)(mm)	417.4 x 312.4 x 63.75	417.4 x 312.4 x 105.95	562.4 x 382.4 x 62.85	562.4x382.4x 105.05	477.64 x 310 x 95.72	400 x 330 x 104.9
Net Weight (kg)	6.4	8.8	9.26	11.7	9.51	8.3
Gross Weight(kg)	10	11.8	13.2	15.5	13.5	11.6




Industrial Panel PC

Industrial Touch Monitor




Model		
	IPPC A1770T-DC	IPPC A1970T-DC
LCD Size	17" 4:3	19" 4:3
Max. Resolution	SXGA, 1280 x 1024	SXGA 1280 x 1024
Luminance (cd/m ²)	350	350
Contrast Ratio	1000	1000
Viewing Angle (H-V)	80(U), 80(D), 85(L), 85(R)	80 (U), 80 (D), 85 (L), 85 (R)
Backlight	LED	LED
LCD Color	16.7M	16.7M
Touch Screen	Resistive 5-wire	Resistive 5-wire
Touch Light Transmission	81%	80%
CPU	4th Gen. Intel® Core™ i5/i3 LGA socket	4th Gen. Intel® Core™ i5/i3 LGA socket
Chipset	Intel® QM87	Intel® QM87
Memory	Max. 8GB DDR3/DDR3L	Max. 8GB DDR3/DDR3L
CFAST Socket	1	1
2nd Display Output	DVI-I + DP	DVI-I + DP
PS2 KB/MS	2	1
Ethernet(10/100/1000)	2	2
Line-out	1	1
Line-in	1	1
Mic-in	1	1
USB2.0/3.0	1(In front)/4	1(In front)/4
COM port	2 x RS232,422,485	2 x RS232,422,485
Power Switch	1	1
Remote Power Switch	1	1
Reset Button	1	1
Power Jack	Terminal Blocks 3-Pin Phoenix Connector	Terminal Blocks 3-Pin Phoenix Connector
GPIO	-	-
Digital I/O	-	-
Expansion	2 x mini-PCIe/ 2 x PCI or PCIe slots	2 x mini-PCIe/ 2 x PCI or PCIe slots
Construction Front Panel	Aluminum Front Bezel	Aluminum Front Bezel
Mounting	Panel/Wall/Stand/ VESA 100 x 100mm	Panel/Wall/Stand/ VESA 100 x 100mm
Power Input	+12 ~ 30VDC	+12V ~ 30VDC
Power Supply Adapter	Optional	Optional
Operating Temp.	-10°C to 50°C	-10°C to 50°C
Storage Temp.	-20°C to 75°C	-20°C to 75°C
Operating Humidity	10% ~ 90%, Non-condensing	10%~90% relative humidity, Non-condensing
IP Level	Front Frame IP66	Front Frame IP66
Cut Out Size (WxH)(mm)	436 x 360.5	452 x 382
Dimension (WxHxD)(mm)	451 x 375.5 x 105	470 x 400 x 104.9
Net Weight (kg)	10.2	10.3
Gross Weight(kg)	14.1	14.6

Model			
	IPPD 1600P	IPPD 1800P	IPPD 2100P
LCD Size	15.6" 16:9	18.5" 16:9	21.5" 16:9
Max. Resolution	WXGA, 1366 x 768	WXGA, 1366 x 768	Full HD, 1920 x 1080
Luminance (cd/m ²)	300	400	300
Contrast Ratio	500	1000	5000
Viewing Angle (H-V)	80(U), 80(D), 85(L), 85(R)	80(U), 80(D), 85(L), 85(R)	89(U), 89(D), 89(L), 89(R)
Backlight	LED	LED	LED
LCD Color	16.7M	16.7M	16.7M
Touch Screen	10 Point P-Cap	10 Point P-Cap	10 Point P-Cap
Touch Light Transmission	87%	87%	87%
Touch Screen I/F	USB	USB	USB
OSD Function	OSD Keypad	OSD Keypad	OSD Keypad
Video input	VGA; DVI-D; DP	VGA; DVI-D; DP	VGA; DVI-D; DP
Power Jack	Terminal Blocks 3-Pin Phoenix Connector	Terminal Blocks 3-Pin Phoenix Connector	Terminal Blocks 3-Pin Phoenix Connector
Construction Front Panel	Aluminum Front Zero Bezel	Aluminum Front Zero Bezel	Aluminum Front Zero Bezel
Mounting	Panel/Wall/ Stand/VESA 100 x 100mm	Panel/Wall/ Stand/VESA 100 x 100mm	Panel/Wall/ Stand/VESA 100 x 100mm
Power Input	+12 ~ 30VDC	+12 ~ 30VDC	+12 ~ 30VDC
Power Supply Adapter	Optional	Optional	Optional
Operating Temp.	-10°C to 60°C	-10°C to 60°C	-10°C to 60°C
Storage Temp.	-20°C to 75°C	-20°C to 75°C	-20°C to 75°C
Operating Humidity	10% ~ 90%, Non-condensing	10% ~ 90%, Non-condensing	10% ~ 90%, Non-condensing
IP Level	Front Frame IP66	Front Frame IP66	Front Frame IP66
Certifications	CE, FCC Class B	CE, FCC Class B	CE, FCC Class B
Cut Out Size (WxH)(mm)	401 x 296	475.4 x 305.2	547 x 367
Dimension (WxHxD)(mm)	417.4 x 312.4 x 51.75	490.8 x 320.6 x 50.65	562.4 x 382.4 x 50.85
Net Weight (kg)	5.3	5.86	7.87
Gross Weight(kg)	8.5	9	12





Applied Panel PC

Model			
	APPC 0840T	APPC1240T	APPC1245T
LCD Size	8.0" 4:3	12.1" 4:3	12.1" 4:3
Max Resolution	SVGA, 800 x 600	SVGA, 800 x 600	XGA, 1024 x 768
Luminance(cd/m2)	400	450	500
Contrast Ratio	500	700	700
Viewing Angle(H-V)	50(U), 70(D), 70(L), 70(R)	65(U), 75(D), 80(L), 80(R)	80(U), 80(D), 80(L), 80(R)
Backlight	LED	LED	LED
LCD Color	262K	16.2M	16.2M
Touch Screen	Resistive 5-wire(Flush panel type)	Resistive 5-wire(Flush panel type)	Resistive 5-wire(Flush panel type)
Touch Light Transmission	82%	80%	80%
CPU	Intel® Atom™ E3826 Dual Core 1.46GHz	Intel® Celeron® J1900 Quad Core up to 2.42GHz	Intel® Celeron® J1900 Quad Core up to 2.42GHz
Memory	2GB DDR3L SO-DIMM module	4GB DDR3L SO-DIMM module	4GB DDR3L SO-DIMM module
CFast socket	1	1	1
2nd display output	VGA	VGA	VGA
PS2 KB/MS	-	1	1
Ethernet(10/100/1000)	2	2	2
Line out	Line out	Line out	Line out
USB 2.0/3.0	3/1	2/1	2/1
COM port	2xRS232/422/485	Isolation 2xRS232/422/485	Isolation 2xRS232/422/485
Power Switch	1	1	1
Remote power switch	1	1	1
Reset Button	1	1	1
Power Jack	DC 4 pin DIN Power Jack with shield, 90°	3 pin phoneix connector	3 pin phoneix connector
Expansion	1xMini PCIe	2xMini PCIe	2xMini PCIe
Construction Front Panel	ABS+PC Plastic front bezel	ABS+PC Plastic front bezel	ABS+PC Plastic front bezel
Mounting	Panel/Wall/Stand/VESA 100x100mm	Panel/Wall/Stand/VESA 100x100mm	Panel/Wall/Stand/VESA 100x100mm
Power Input	+12 to 30V DC	+12 to 30V DC	+12 to 30V DC
Power Supply Adapter	Optional	Optional	Optional
Operating Temp.	-5°C to 50°C	-5°C to 60°C	-5°C to 60°C
Storage Temp.	-20°C to 75°C	-20°C to 75°C	-20°C to 75°C
Operating Humidity	10%~90%, Non-condensing	10%~90%, Non-condensing	10%~90%, Non-condensing
IP Level	Front Frame IP65	Front Frame IP65	Front Frame IP65
Cut Out Size (WxH) (mm)	209.6x167.1	304.5x230	304.5x230
Dimension (WxHxD) (mm)	217.4x176.4x68.9	317x243x65.89	317x243x65.89
Net Weight (kg)	2.3	4	4
Gross Weight (kg)	4	6	6




Applied Panel PC

Model			
	APPC1540T	APPC1740T	APPC1940T
LCD Size	15" 4:3	17" 4:3	19" 4:3
Max Resolution	XGA, 1024 x 768	SXGA, 1280 x 1024	SXGA, 1280 x 1024
Luminance(cd/m2)	450	350	350
Contrast Ratio	700	1000	1000
Viewing Angle(H-V)	70(U), 80(D), 80(L), 80(R)	80(U), 80(D), 85(L), 85(R)	80(U), 80(D), 85(L), 85(R)
Backlight	LED	LED	LED
LCD Color	16.2M	16.7M	16.7M
Touch Screen	Resistive 5-wire (Flush panel type)	Resistive 5-wire (Flush panel type)	Resistive 5-wire (Flush panel type)
Touch Light Transmission	80%	81%	81%
CPU	Intel® Celeron® J1900 Quad Core up to 2.42GHz	Intel® Celeron® J1900 Quad Core up to 2.42GHz	Intel® Celeron® J1900 Quad Core up to 2.42GHz
Memory	4GB DDR3L SO-DIMM module	4GB DDR3L SO-DIMM module	4GB DDR3L SO-DIMM module
CFast socket	1	1	1
2nd display output	VGA	VGA	VGA
PS2 KB/MS	1	1	1
Ethernet (10/100/1000)	2	2	2
Line out	Line out	Line out	Line out
USB 2.0/3.0	2/1	2/1	2/1
COM port	Isolation 2xRS232/422/485	Isolation 2xRS232/422/485	Isolation 2xRS232/422/485
Power Switch	1	1	1
Remote power switch	1	1	1
Reset Button	1	1	1
Power Jack	3 pin phoneix connector	3 pin phoneix connector	3 pin phoneix connector
Expansion	2xMini PCIe	2xMini PCIe	2xMini PCIe
Construction Front Panel	ABS+PC Plastic front bezel	ABS+PC Plastic front bezel	ABS+PC Plastic front bezel
Mounting	Panel/Wall/Stand/VESA 100x100mm	Panel/Wall/Stand/VESA 100x100mm	Panel/Wall/Stand/VESA 100x100mm
Power Input	+12 to 30V DC	+12 to 30V DC	+12 to 30V DC
Power Supply Adapter	Optional	Optional	Optional
Operating Temp.	-5°C to 60°C	-5°C to 60°C	-5°C to 50°C
Storage Temp.	-20°C to 75°C	-20°C to 75°C	-20°C to 75°C
Operating Humidity	10%~90%, Non-condensing	10%~90%, Non-condensing	10%~90%, Non-condensing
IP Level	Front Frame IP65	Front Frame IP65	Front Frame IP65
Cut Out Size (WxH) (mm)	371x297	399x329	436x366
Dimension (WxHxD) (mm)	384.37 x 309.95 x 63.2	410.4x340.4x65.9	457.64x379.24x61.25
Net Weight (kg)	5.1	6.7	6.7
Gross Weight (kg)	9	8	9



HMI

Model				
	eTOP504	eSMART04N	eTOP507/507N	eSMART07N
LCD Size	4.3" 16:9	4.3" 16:9	7" 16:9	7" 16:9
Max. Resolution	WQVGA, 480 x 272	WQVGA, 480 x 272	WVGA, 800 x 480	WVGA, 800 x 480
Luminance(cd/m2)	150 typ.	200 typ.	300 typ.	200 typ.
Backlight	LED	LED	LED	LED
LCD Color	64K	64K	64K	64K
Touch Screen	Resistive	Resistive	Resistive	Resistive
OS	Microsoft Windows CE 6.0	Linux 3.12	Microsoft Windows CE 6.0	Linux 3.12
Memory	256MB DDR	256MB DDR	256MB DDR	256MB DDR
User Memory	128MB	2GB	128MB	2GB
Ethernet	2 (10/100 Mbit)	1 (10/100 Mbit)	2 (10/100 Mbit)	1 (10/100 Mbit)
USB	2 x USB2.0	1 x USB2.0	2 x USB2.0	1 x USB 2.0
COM port	1 x RS232, 422, 485 software configuration	1 x RS232, 422, 485 software configuration	1 x RS232, 422, 485 software configuration	1 x RS232, 422, 485 software configuration
Power Jack	3-pin terminal block	3-pin terminal block	3-pin terminal block	3-pin terminal block
SD Socket	Yes	-	Yes	-
Expansion	1 Optional plug-in	-	2 Optional plug-in	-
Construction	Aluminum	Plastic	Aluminum	Plastic
Mounting	Panel Mounting	Panel Mounting	Panel Mounting	Panel Mounting
Power Input	24Vdc (10 to 32 Vdc)	24Vdc (18 to 32 Vdc)	24Vdc (10 to 32 Vdc)	24Vdc (18 to 32 Vdc)
Current Consumption	0.55A at 24Vdc (max.)	0.25A at 24Vdc (max.)	0.65A at 24Vdc (max.)	0.3A at 24Vdc (max.)
Power Supply Adapter	Optional	Optional	Optional	Optional
Operating Temp.	0°C to 50°C	0°C to 50°C	0°C to 50°C	0°C to 50°C
Storage Temp.	-20°C to 70°C	-20°C to 70°C	-20°C to 70°C	-20°C to 70°C
Operating Humidity	5% ~ 85%, Non-condensing	5% ~ 85%, Non-condensing	5% ~ 85%, Non-condensing	5% ~ 85%, Non-condensing
IP Level	IP66 (front), IP20 (rear)	IP66 (front), IP20 (rear)	IP66 (front), IP20 (rear)	IP66 (front), IP20 (rear)
Cut Out Size (WxH)(mm)	136 x 96	136 x 96	176 x 136	176 x 136
Dimension (WxHxD)(mm)	147 x 107 x 60	147 x 107 x 34	187 x 147 x 51	187 x 147 x 34
Net Weight (kg)	Approx. 1	Approx. 0.4	Approx. 1	Approx. 0.6
Gross Weight(kg)	1.3	0.7	1.4	0.9




HMI

Model			 x86 CPU
	eTOP510	eSMART10N	eLITE610
LCD Size	10.4" 4:3	10.1" 16:9	10.1" 16:9
Max. Resolution	WVGA, 800 x 480	WSVGA, 1024 x 600	WSVGA, 1024 x 600
Luminance(cd/m2)	300 typ.	200 typ.	240 typ.
Backlight	LED	LED	LED
LCD Color	64K	64K	16.7M
Touch Screen	Resistive	Resistive	Resistive
OS	Microsoft Windows CE 6.0	Linux 3.12	Windows 10
Memory	256MB DDR	512MB DDR	4GB DDR
User Memory	256MB	4GB	32GB
Ethernet	2 (10/100 Mbit)	1 (10/100 Mbit)	2 (10/100/1000 Mbit)
USB	2 x USB 2.0	1 x USB 2.0	2 x USB 3.0
COM port	1 x RS232, 422, 485 software configuration	1 x RS232, 422, 485 software configuration	1 x RS232, 422, 485 BIOS configuration
Power Jack	3-pin terminal block	3-pin terminal block	3-pin terminal block
SD Socket	Yes	-	-
Expansion	2 Optional plug-in	-	-
Construction	Aluminum	Plastic	Plastic
Mounting	Panel Mounting	Panel Mounting	Panel Mounting
Power Input	24Vdc (10 to 32 Vdc)	24Vdc (18 to 32 Vdc)	24Vdc (19.2 to 28.8 Vdc)
Current Consumption	0.95A at 24Vdc (max.)	0.38A at 24Vdc (max.)	1.64A at 24Vdc (max.)
Power Supply Adapter	Optional	Optional	Optional
Operating Temp.	0°C to 50°C	0°C to 50°C	-5°C to 50°C
Storage Temp.	-20°C to 70°C	-20°C to 70°C	-20°C to 70°C
Operating Humidity	5% ~ 85%, Non-condensing	5% ~ 85%, Non-condensing	5% ~ 90%, Non-condensing
IP Level	IP66 (front), IP20 (rear)	IP66 (front), IP20 (rear)	IP66 (front), IP20 (rear)
Cut Out Size (WxH)(mm)	276 x 221	271 x 186	271 x 186
Dimension (WxHxD)(mm)	287 x 232 x 60	282x 197 x 35	282 x 197 x 35
Net Weight (kg)	Approx. 2.1	Approx. 1	Approx. 1.37
Gross Weight(kg)	2.8	1.6	2.3




Teach Pendant

Model		
	TP-100	TP-100-VGA
LCD Size	10.1" 16:10	10.1" 16:10
Max. Resolution	WXGA, 1280 x 800	WXGA, 1280 x 800
Luminance(cd/m2)	500	500
Backlight	LED	LED
LCD Color	16.7M	16.7M
Touch Screen	10 points P-Cap	10 points P-Cap
Emergency Stop Button	2 channels (2 NC)	2 channels (2 NC)
3-position Deadman Switch	3 channels (2 NO&1NC)	3 channels (2 NO&1NC)
2-position Key Switch	2 channels (auto/manual)	2 channels (auto/manual)
CPU	Intel® Atom™ E3826 Dual Core 1.46GHz	-
Memory	4GB DDR3L	-
User Memory	32GB	-
Ethernet	1 (10/100/1000Mbit)	-
Display Input	-	VGA
USB	2 USB 3.0	2 USB 3.0
Cable Connector and Signal	HDB-44 (including power, E-stop buttons, deadman switch, key switch and Giga LAN signals)	HDB-44 (including power, E-stop buttons, deadman switch, key switch USB 3.0 and VGA signals)
Construction	Front: aluminum magnesium alloy Back: ABS+PC plastic	Front: aluminum magnesium alloy Back: ABS+PC plastic
Power Input	24Vdc (19.2 to 28.8 Vdc)	24Vdc (19.2 to 28.8 Vdc)
Current Consumption	0.76A at 24Vdc (max.)	0.625A at 24Vdc (max.)
Power Supply Adapter	Optional	Optional
Operating Temp.	0°C to 45°C	0°C to 50°C
Storage Temp.	-20°C to 70°C	-20°C to 75°C
Operating Humidity	5% ~90%, non-condensing	5% ~90%, non-condensing
IP Level	Full IP65	Full IP65
Dimension (WxHxD)(mm)	297.3 x 257.2 x 57.2 (78.5mm including emergency button)	297.3 x 257.2 x 57.2 (78.5mm including emergency button)
Weight (kg)	1.45	1.5
Gross Weight(kg)	2	2.3



Kiosk Panel PC

Model			
	KPPC-1011	KPPC-1057	KPPC-1514
LCD Size	10.1" 16:9	10.1" 16:9	15.6" 16:9
Max. Resolution	WXGA, 1280 x 800	WXGA, 1280 x 800	1366 x 768
Luminance (cd/m2)	350	350	300
Contrast Ratio	800	1000	500
Viewing Angle (H-V)	85(U), 85(D), 85(L), 85(R)	85(U), 85(D), 85(L), 85(R)	80(U), 80(D), 80(L), 80(R)
Backlight	LED	LED	LED
LCD Color	16.2M	16.2M	16.7M
Touch Screen	10.1" Projected Capacitive Touch Panel	10.1" Projected Capacitive Touch Panel	15.6" Projected Capacitive Touch Panel
CPU	Intel® Core i™ KabyLake-U Dual Core Processor	Intel® Atom™ E3930/3950 Dual/Quad Core Processor, 1.3/1.6GHz 2M L2 Cache;	Intel® Celeron® N3060 (Braswell) Dual Core Processor, 1.6GHz 2M L2 Cache;
Memory	4GB DDR4 SO-DIMM Module	4GB DDR3L SO-DIMM Module	4GB DDR3L SO-DIMM Module
Storage Device	1 x 2.5" SATA HDD Internal mSATA (optional)	1 x 2.5" SATA HDD	1 x 2.5" SATA HDD
2nd Display Output	HDMI / DP	VGA / HDMI	VGA/DVI
Ethernet (10/100/1000)	2	2	2
Line-out / MIC	Line-OUT	Line-OUT / MIC	Line-OUT/MIC
USB 2.0 / USB 3.0	2 / 4	4 x USB3.0	4 x USB3.0
Cash Drawer Port	X	X	X
Parallel Port	X	X	X
COM Port	1xRS232 1xRS232,422, 485 selectable	1xRS232,422,485 selectable	4xRS232 1xRS232,422,485 selectable
+12VDC-OUT Jack	X	X	X
DC-IN Jack	DC-9~24V IN	DC-12V IN	DC-12V IN
Power Switch	1	1	1
Internal Speaker	Optional	Optional	Optional
Expansion	2 x Mini-PCIe (1 share with mSATA)	Mini-PCIe / NGFF B Key	Mini PCIe/M.2 M Key (2242/2280)
Power Supply Adapter	External AC DC 12V/ 4.16A 50W Power Brick	External AC DC 12V/ 4.16A 50W Power Brick	External AC DC 12V/ 7A 84W Power Brick
Operating Temp.	0°C to 50°C	0°C to 50°C	0°C to 50°C
Storage Temp.	-20°C to 60°C	-20°C to 60°C	-20°C to 60°C
Operating Humidity	20%~80%, Non-condensing	20%~80%, Non-condensing	20%~80%, Non-condensing
IP Level	Front Bezel IP65	Front Bezel IP65	Front Bezel IP65
Dimension (WxHxD) (mm)	308 x 223 x 61.2	308 x 223 x 61.2	417.8 x 312.8 x 63.55
Weight (kg)	3.0	3.0	4.5






Kiosk Panel PC

Model			
	KPPC-1557	KPPC-1812	KPPC-1857
LCD Size	15.6" 16:9	18.5" 16:9	18.5" 16:9
Max. Resolution	1366 x 768	WXGA, 1366 x 768	1366 x 768
Luminance (cd/m2)	300	250	250
Contrast Ratio	500	1000	1000
Viewing Angle (H-V)	80(U), 80(D), 80(L), 80(R)	80(U), 80(D), 85(L), 85(R)	85(U), 85(D), 80(L), 80(R)
Backlight	LED	LED	LED
LCD Color	16.7M	16.7M	16.7M
Touch Screen	15.6" Projected Capacitive Touch Panel	18.5" Projected Capacitive Touch Panel	18.5" Projected Capacitive Touch Panel
CPU	Intel® Atom™ E3930/3950 Dual/Quad Core Processor, 1.3/1.6GHz 2M L2 Cache;	Intel® Atom™ J1900 Quad Core Processor, 2.0GHz 2M L2 Cache;	Intel® Atom™ E3930/3950 Dual/Quad Core Processor, 1.3/1.6GHz 2M L2 Cache;
Memory	4GB DDR3L SO-DIMM Module	4GB DDR3L SO-DIMM Module	4GB DDR3L SO-DIMM Module
Storage Device	1 x 2.5" SATA HDD	1 x 2.5" SATA HDD	1 x 2.5" SATA HDD
2nd Display Output	VGA / HDMI	VGA	VGA / HDMI
Ethernet (10/100/1000)	2	1	2
Line-out / MIC	Line-OUT / MIC	Line-OUT / MIC	Line-OUT / MIC
USB 2.0 / USB 3.0	4 x USB3.0	2 / 2	4 x USB3.0
Cash Drawer Port	X	1	X
Parallel Port	X	1	X
COM Port	1xRS232,422,485 selectable	4x RJ-45 Powered RS-232	1xRS232,422,485 selectable
+12VDC-OUT Jack	X	1	X
DC-IN Jack	DC-12V IN	DC-24V IN	DC-12V IN
Power Switch	1	1	1
Internal Speaker	Optional	Optional	Optional
Expansion	Mini-PCIe / NGFF B Key	2 x Mini-PCIe	Mini-PCIe / NGFF B Key
Power Supply Adapter	External AC DC 12V/ 7A 84W Power Brick	External AC DC 24V/ 5.0A 120W Power Brick	External AC DC 12V/ 7A 84W Power Brick
Operating Temp.	0°C to 50°C	0°C to 40°C	0°C to 50°C
Storage Temp.	-20°C to 60°C	-20°C to 60°C	-20°C to 60°C
Operating Humidity	20%~80%, Non-condensing	20%~80%, Non-condensing	20%~80%, Non-condensing
IP Level	Front Bezel IP65	Front Bezel IP65	Front Bezel IP65
Dimension (WxHxD) (mm)	417.8 x 312.8 x 63.55	461.6x309.8x64.5	490.8 x 320.6 x 59.45
Weight (kg)	4.5	6.2	6.0




Kiosk Panel PC

Model			
	KPPC-1814	KPPC-2157	KPPC-2114
LCD Size	18.5" 16:9	21.5" 16:9	21.5" 16:9
Max. Resolution	1366 x 768	1920 x 1080	1920 x 1080
Luminance (cd/m2)	250	250	250
Contrast Ratio	1000	3000	3000
Viewing Angle (H-V)	85(U), 85(D), 80(L), 80(R)	89(U), 89(D), 89(L), 89(R)	89(U), 89(D), 89(L), 89(R)
Backlight	LED	LED	LED
LCD Color	16.7M	16.7M	16.7M
Touch Screen	18.5" Projected Capacitive Touch Panel	21.5" Projected Capacitive Touch Panel	21.5" Projected Capacitive Touch Panel
CPU	Intel® Celeron® N3060 (Braswell) Dual Core Processor, 1.6GHz 2M L2 Cache;	Intel® Atom™ E3930/3950 Dual/Quad Core Processor, 1.3/1.6GHz 2M L2 Cache;	Intel® Celeron® N3060 (Braswell) Dual Core Processor, 1.6GHz 2M L2 Cache;
Memory	4GB DDR3L SO-DIMM Module	4GB DDR3L SO-DIMM Module	4GB DDR3L SO-DIMM Module
Storage Device	1 x 2.5" SATA HDD	1 x 2.5" SATA HDD	1 x 2.5" SATA HDD
2nd Display Output	VGA/DVI	VGA / HDMI	VGA/DVI
Ethernet (10/100/1000)	2	2	2
Line-out / MIC	Line-OUT/MIC	Line-OUT / MIC	Line-OUT/MIC
USB 2.0 / USB 3.0	4 x USB3.0	4 x USB3.0	4 x USB3.0
Cash Drawer Port	X	X	X
Parallel Port	X	X	X
COM Port	4xRS232 1xRS232,422,485 selectable	1xRS232,422,485 selectable	4xRS232 1xRS232,422,485 selectable
+12VDC-OUT Jack	X	X	X
DC-IN Jack	DC-12V IN	DC-12V IN	DC-12V IN
Power Switch	1	1	1
Internal Speaker	Optional	Optional	Optional
Expansion	Mini PCIe/M.2 M Key (2242/2280)	Mini-PCIe / NGFF B Key	Mini PCIe/M.2 M Key (2242/2280)
Power Supply Adapter	External AC DC 12V/ 7A 84W Power Brick	External AC DC 12V/ 7A 84W Power Brick	External AC DC 12V/ 7A 84W Power Brick
Operating Temp.	0°C to 50°C	0°C to 50°C	0°C to 50°C
Storage Temp.	-20°C to 60°C	-20°C to 60°C	-20°C to 60°C
Operating Humidity	20%~80%, Non-condensing	20%~80%, Non-condensing	20%~80%, Non-condensing
IP Level	Front Bezel IP65	Front Bezel IP65	Front Bezel IP65
Dimension (WxHxD) (mm)	490.8 x 320.6 x 59.45	562.4 x 382.4 x 59.65	562.4 x 382.4 x 59.65
Weight (kg)	6.0	8.0	8.0




Point-of-Sales (POS)

Model					Model	
	NPT 1560	NPT 1562	NPT 5850	NPT 5852		NPD 1050
LCD Size	15" 4:3	15" 4:3	15" 4:3	15" 4:3	LCD Size	15" 4:3
Max. Resolution	XGA, 1024 x 768	XGA, 1024 x 768	XGA, 1024 x 768	XGA, 1024 x 768	Max. Resolution	XGA, 1024 x 768
Luminance (cd/m2)	250	250	250	250	Luminance (cd/m2)	250
Contrast Ratio	700	700	700	700	Contrast Ratio	700
Viewing Angle (H-V)	80(U), 80(D), 85(L), 85(R)	80(U), 80(D), 85(L), 85(R)	80(U), 80(D), 85(L), 85(R)	80(U), 80(D), 85(L), 85(R)	Viewing Angle (H-V)	80(U), 80(D), 85(L), 85(R)
Backlight	LED	LED	LED	LED	Backlight	CCFL / LED
LCD Color	262,144	262,144	262,144	262,144	LCD Color	16.2M
Touch Screen	15" 5-wire Resistive Touch Panel	15" Zero Bezel Projected Capacitive Touch Panel	15" 5-wire Resistive Touch Panel	15" Zero Bezel Projected Capacitive Touch Panel	Touch Screen	15" 5-wire Resistive Touch Panel
CPU	Intel® Atom™ J1900 Quad Core Processor, 2.0GHz 2M L2 Cache;	Intel® Atom™ J1900 Quad Core Processor, 2.0GHz 2M L2 Cache;	2nd Generation Intel® Core™ Processor, FCBGA 989	2nd Generation Intel® Core™ Processor, FCBGA 989	VGA	1
Chipset	N/A	N/A	Intel® BD82HM65 Platform Controller Hub, BD82HM65	Intel® BD82HM65 Platform Controller Hub, BD82HM65	DVI-D	1
Memory	4GB DDR3L SO-DIMM Module	4GB DDR3L SO-DIMM Module	2GB DDR3 SO-DIMM Module	2GB DDR3 SO-DIMM Module	Display Port	1
Storage Device	1 x 2.5" SATA HDD	1 x 2.5" SATA HDD	1 x 2.5" SATA HDD	1 x 2.5" SATA HDD	OSD Function	1x AUTO button for Auto Adjust
2nd Display Output	VGA	VGA	VGA	VGA	Touch Screen I/F	USB / RS-232
Ethernet (10/100/1000)	1	1	1	1	Construction Front Panel	ABS + PC Plastic Front Bezel
Line-out / MIC	Line-OUT / MIC	Line-OUT / MIC	Line-OUT	Line-OUT	Mounting	Panel/ Wall/ Stand/ VESA 100 x 100 mm
USB 2.0 / USB 3.0	2 / 2	2 / 2	4 / 0	4 / 0	Power Supply	External AC DC 12V/ 5.0A 60W Power Brick
Cash Drawer Port	1	1	1	1	Operating Temp.	0°C to 40°C
Parallel Port	(1)	(1)	1	1	Storage Temp.	-20°C to 60°C
COM Port	4x RJ-45 Powered RS-232	4x RJ-45 Powered RS-232	4x DB-9 Powered RS-232	4x DB-9 Powered RS-232	Operating Humidity	20%~80%, Non-condensing
+12VDC-OUT Jack	1	1	1	1	IP Level	Front Bezel IP65
DC-IN Jack	DC-24V IN	DC-24V IN	DC-19V IN	DC-19V IN	Dimension	368(W) x 331(H) x 210(D) mm (No MSR)/ 410(W) x 331(H) x 210(D) mm (w/ MSR)
Power Switch	1	1	1	1	Weight	7.0kg (15.43lbs)
Internal Speaker	N/A	N/A	1	1		
Expansion	2 x Mini-PCIe	2 x Mini-PCIe	1x Mini-PCIe	1x Mini-PCIe		
Power Supply Adapter	External AC DC 24V/ 5.0A 120W Power Brick	External AC DC 24V/ 5.0A 120W Power Brick	External AC DC 19V/ 6.31A 120W Power Brick	External AC DC 19V/ 6.31A 120W Power Brick		
Operating Temp.	0°C to 40°C	0°C to 40°C	0°C to 40°C	0°C to 40°C		
Storage Temp.	-20°C to 60°C	-20°C to 60°C	-20°C to 60°C	-20°C to 60°C		
Operating Humidity	20%~80%, Non-condensing	20%~80%, Non-condensing	20%~80%, Non-condensing	20%~80%, Non-condensing		
IP Level	Front Bezel IP65	Front Bezel IP65	Front Bezel IP65	Front Bezel IP65		
Dimension (WxHxD) (mm)	368x331x210 (No MSR) 410x331x210 (w/ MSR)	368x331x210 (No MSR) 410x331x210 (w/ MSR)	368x331x210 (No MSR) 410(W)x331(H)x210 (w/ MSR)	368(W) x 331(H) x 210(D) mm (No MSR) 210(D) mm (No MSR)/ 410(W) x 331(H) x 210(D) mm (w/ MSR)		
Weight (kg)	8.0	8.0	8.0	8.0		



Open Frame Panel PC

Model			
	OPPC 1240T	OPPC 1540T	OPPC 1540T-J1900
LCD Size	12.1" 4:3	15" 4:3	15" 4:3
Max. Resolution	SVGA, 800 x 600	XGA, 1024 x 768	XGA, 1024 x 768
Luminance (cd/m2)	450	420	420
Contrast Ratio	700	800	800
Viewing Angle (H-V)	65(U), 75(D), 80(L), 80(R)	60(U), 80(D), 80(L), 80(R)	60(U), 80(D), 80(L), 80(R)
Backlight	LED	LED	LED
LCD Color	16.2M	16.7M	16.7M
Touch Screen	Resistive 5-wire	Resistive 5-wire	Resistive 5-wire
Touch Light Transmission	80%	80%	80%
CPU	Intel® Atom™ E3826 Dual Core 1.46GHz	Intel® Atom™ E3826 Dual Core 1.46GHz	Intel® Celeron™ J1900 Quad Core 2.0GHz
Memory	4GB DDR3L SO-DIMM module	4GB DDR3L SO-DIMM module	4GB DDR3L SO-DIMM module
CF or CFast Socket	1 CFast	1 CFast	1 CFast
2nd Display Output	VGA	VGA	VGA
PS2 KB/MS	1	1	1
Ethernet (10/100/1000)	2	2	2
Line-out	Line-out	Line-out	Line-out
USB2.0/ USB3.0	2/1	2/1	2/1
COM port	2 x RS232/422/485	2 x RS232/422/485	2 x RS232/422/485
Power Switch	1	1	1
Reset Button	1	1	1
Power Jack	3 Pin Phoenix Connector	3 Pin Phoenix Connector	3 Pin Phoenix Connector
2.5" Hard Driver Bay	Yes	Yes	Yes
Expansion	2 x mini-PCIe	2 x mini-PCIe	2 x mini-PCIe
Mounting	Panel/Wall/Stand/ VESA 75x75, 100x100mm	Panel/Wall/Stand/ VESA 75x75, 100x100mm	Panel/Wall/Stand/ VESA 75x75, 100x100mm
Power Input	+12 ~ 30VDC	+12 ~ 30VDC	+12 ~ 30VDC
Power Supply Adapter	Optional	Optional	Optional
Operating Temp.	-5°C to 50°C	-5°C to 50°C	-5°C to 50°C
Storage Temp.	-20°C to 75°C	-20°C to 75°C	-20°C to 75°C
Operating Humidity	10% ~ 90%, Non-condensing	10% ~ 90%, Non-condensing	10% ~ 90%, Non-condensing
Dimension (WxHxD)(mm)	307 x 240 x 61.8	329 x 280 x 69.3	329 x 280 x 69.3
Weight (kg)	3.8	4	4



Open Frame Panel PC

Model			
	OPPC 1740T	OPPC 1940T	OPPC 1940T-J1900
LCD Size	17" 4:3	19" 4:3	19" 4:3
Max. Resolution	SXGA, 1280 x 1024	SXGA, 1280 x 1024	SXGA, 1280 x 1024
Luminance (cd/m ²)	350	350	350
Contrast Ratio	1000	1000	1000
Viewing Angle (H-V)	80(U), 80(D), 85(L), 85(R)	80(U), 80(D), 85(L), 85(R)	80(U), 80(D), 85(L), 85(R)
Backlight	LED	LED	LED
LCD Color	16.7M	16.7M	16.7M
Touch Screen	Resistive 5-wire	Resistive 5-wire	Resistive 5-wire
Touch Light Transmission	80%	80%	80%
CPU	Intel® Atom™ E3826 Dual Core 1.46GHz	Intel® Atom™ E3826 Dual Core 1.46GHz	Intel® Celeron™ J1900 Quad Core 2.0GHz
Memory	4GB DDR3L SO-DIMM module	4GB DDR3L SO-DIMM module	4GB DDR3L SO-DIMM module
CF or CFast Socket	1 CFast	1 CFast	1 CFast
2nd Display Output	VGA	VGA	VGA
PS2 KB/MS	-	-	-
Ethernet (10/100/1000)	2	2	2
Line-out	Line-out	Line-out	Line-out
USB2.0/ USB3.0	2/1	2/1	2/1
COM port	2 x RS232/422/485	2 x RS232/422/485	2 x RS232/422/485
Power Switch	1	1	1
Reset Button	1	1	1
Power Jack	3 Pin Phoneix Connector	3 Pin Phoneix Connector	3 Pin Phoneix Connector
2.5" Hard Driver Bay	Yes	Yes	Yes
Expansion	2 x mini-PCIe	2 x mini-PCIe	2 x mini-PCIe
Mounting	Panel/Wall/Stand/ VESA 75x75, 100x100mm	Panel/Wall/Stand/ VESA 75x75, 100x100mm	Panel/Wall/Stand/ VESA 75x75, 100x100mm
Power Input	+12 ~ 30VDC	+12 ~ 30VDC	+12 ~ 30VDC
Power Supply Adapter	Optional	Optional	Optional
Operating Temp.	-5°C to 50°C	-5°C to 50°C	-5°C to 50°C
Storage Temp.	-20°C to 75°C	-20°C to 75°C	-20°C to 75°C
Operating Humidity	10% ~ 90%, Non-condensing	10% ~ 90%, Non-condensing	10% ~ 90%, Non-condensing
Dimension (WxHxD)(mm)	387 x 323.2 x 73.6	422.6 x 350.6 x 75.8	422.6 x 350.6 x 75.8
Weight (kg)	5.6	6.15	6.15





Open Frame High Brightness Panel PC


Model		
	OPPC 1540HT-J1900	OPPC 1940HT-J1900
LCD Size	15" 4:3	19" 4:3
Max. Resolution	SXGA, 1280 x 1024	SXGA, 1280 x 1024
Luminance (cd/m2)	1000	1000
Contrast Ratio	2500	1000
Viewing Angle (H-V)	88(U), 88(D), 88(L), 88(R)	80(U), 80(D), 85(L), 85(R)
Backlight	LED	LED
LCD Color	16.2M	16.7M
Touch Screen	Resistive 5-wire	Resistive 5-wire
Touch Light Transmission	80%	80%
CPU	Intel® Celeron™ J1900 Quad Core 2.0GHz	Intel® Celeron™ J1900 Quad Core 2.0GHz
Memory	4GB DDR3L SO-DIMM module	4GB DDR3L SO-DIMM module
CF or CFast Socket	1 CFast	1 CFast
2nd Display Output	VGA	VGA
PS2 KB/MS	-	-
Ethernet (10/100/1000)	2	2
Line-out	Line-out	Line-out
USB2.0/USB3.0	2/1	2/1
COM port	2 x RS232/422/485	2 x RS232/422/485
Power Switch	1	1
Reset Button	1	1
Power Jack	3 Pin Phoenix Connector	3 Pin Phoenix Connector
2.5" Hard Driver Bay	Yes	Yes
Expansion	2 x mini-PCle	2 x mini-PCle
Mounting	Panel/Wall/Stand/ VESA 75x75, 100x100mm	Panel/Wall/Stand/ VESA 75x75, 100x100mm
Power Input	+12 ~ 30VDC	+12 ~ 30VDC
Power Supply Adapter	Optional	Optional
Operating Temp.	-5°C to 50°C	-5°C to 50°C
Storage Temp.	-20°C to 75°C	-20°C to 75°C
Operating Humidity	10% ~ 90%, Non-condensing	10% ~ 90%, Non-condensing
Dimension (WxHxD) (mm)	329 x 280 x 69.3	422.6 x 350.6 x 75.8
Weight (kg)	4	6.15

Transport Infotainment Panel PC & Display

		
	TPPC 2210	TPPD 2200
Model		
LCD Size	21.5" 16:9	21.5" 16:9
Max. Resolution	FD 1920x1080	FD 1920x1080
Luminance (cd/m2)	500	500
Contrast Ratio	3000	3000
Viewing Angle (H-V)	89(U), 89(D), 89(L), 89 (R)	89(U), 89(D), 89(L), 89 (R)
Backlight	LED	LED
LCD Color	16.7M	16.7M
CPU	Intel® Celeron™ N2807 Dual core 1.58GHz	N/A
Memory	DDR3L SO-DIMM, up to 4GB	N/A
Storage Device	1 x 2.5" SSD 1x mSATA	N/A
2nd Display Output	N/A	N/A
Ethernet (10/100/1000)	2	N/A
USB2.0/USB3.0	2/0	N/A
COM Port	1	N/A
CAT5 extender Daisy Chain	TX(Optional)	TX / RX
Speaker	2W x 2	N/A
power input	DC 12V to 36V	DC 12V to 36V
Expansion	2 x mini PCIe	N/A
Power Switch	1	N/A
Mounting	VESA 75/ 100/ 200	VESA 75/ 100/ 200
Power Jack	2 x 3 P2.5	2 x 3 P2.5
Operating Temp.	-10°C to 40°C	-10°C to 40°C
Storage Temp.	-20°C to 60°C	-20°C to 60°C
Operating Humidity	10% ~ 90%, Non-condensing	10% ~ 90%, Non-condensing
IP Level	IP54	IP54
Dimension (WxHxD)(mm)	528.46x323.06x58	528.46x323.06x58
Weight (kg)	7	7

Marine Panel PC

Model	 (M)PPC-080T-BT-01	 (M)PPC-120T-BT-01	 (M)PPC-120T-BT-02	 (M)PPC-240T-HW-01
LCD Size	16:9 8"	16:9 12"	16:9 12"	16:9 24"
Max. Resolution	WVGA 800 x 480	WXGA 1280 x 800	WXGA 1280 x 800	Full HD 1920 x 1080
Luminance (cd/m2)	600	500	500	300
Contrast Ratio	600	1000	1000	5000
Viewing Angle (H-V)	60(U), 60(D), 70(L), 70(R)	88(U), 88(D), 88(L), 88(R)	88(U), 88(D), 88(L), 88(R)	89(U), 89(D), 89(L), 89(R)
Backlight	LED	LED	LED	LED
LCD Color	16.2M	16.2M	16.2M	16.7M
Touch Screen	8" Projected Capacitive Touch Panel With AR coating	12" Projected Capacitive Touch Panel With AR coating	12" Projected Capacitive Touch Panel With AR coating	24" Projected Capacitive Touch Panel With AR coating
Touch Light Transmission	89%	89%	89%	91%
CPU	Intel® Atom™ processor E3845, 1.91 GHz, 2M L2 Cache	Intel® Atom™ processor E3845, 1.91 GHz, 2M L2 Cache	Intel® Atom™ processor E3845, 1.91 GHz, 2M L2 Cache	Intel® Core™ processor i5-4300U, 1.9GHz, 3M Cache
Memory	4GB DDR3L SO-DIMM module	4GB DDR3L SO-DIMM module	2GB DDR3L SO-DIMM module	4GB DDR3L SO-DIMM module
Storage	128G M.2 SATA	128G M.2 SATA	32G M.2 SATA	128G M.2 SATA
2nd Display Output	mini DP	mini DP	mini DP	DVI-I
Ethernet (10/100/1000)	4	4	4	4
USB2.0/USB3.0	1/1	1/1	1/1	2/2
COM port	1x RJ45 output for RS232/422/485	1x RJ45 output for RS232/422/485	1x RJ45 output for RS232/422/485	1x RS232/422/485
Power Jack	3-pin Phoenix terminal blocks	3-pin Phoenix terminal blocks	3-pin Phoenix terminal blocks	IEC 60320 C14 connector 3-Pin Phoenix terminal blocks
2.5" Hard Driver Bay	No	Yes	Yes	No
Expansion	1x SATA	1x SATA	1x SATA	1x mini-PCIe
Mounting	Flush/VESA 75mm x 75mm	Flush/VESA 75mm x 75mm	Flush/VESA 75mm x 75mm	Flush/VESA 100mm x100mm
Power Input	24VDC	24VDC	24VDC	110/230VAC 24VDC
Power Supply Adapter	Optional	Optional	Optional	Optional
Operating Temp.	-25°C to 70°C	-25°C to 70°C	-25°C to 70°C	-25°C to 70°C
Storage Temp.	-25°C to 75°C	-25°C to 75°C	-25°C to 75°C	-25°C to 75°C
Operating Humidity	10%~90%, non-condensing	10%~90%, non-condensing	10%~90%, non-condensing	10%~90%, non-condensing
IP Level	IP65 front bezel IP20 back system	IP65 front bezel IP20 back system	IP65 front bezel IP20 back system	IP65 front bezel IP20 back system
Dimension (WxHxD)(mm)	218.5x147.5x39.5	307.5x209x39.9	307.5x209x39.9	590x366.6x71.66
Weight(kg)	3	5	5	9

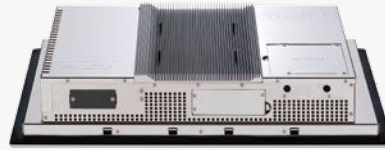

Main Features

- 4:3 15" XGA fanless panel computer
- Powerful 2nd/3rd generation Intel® Core™ processor
- Two expansion slots for add-on PCI or/and PCIe cards
- Optional 3.5G/Wi-Fi module/2.5" HDD
- Metal housing with robust aluminum front bezel for harsh environment
- IP65 compliant front panel
- Support fieldbus module, JMobile HMI and CODESYS SoftLogic (optional)
- For class I, division 2 hazardous locations

Product Overview

IPPC 1560TE is a heavy industrial panel PC equipped with powerful 2nd/3rd generation Intel® Core™ processor, TFT LCD panel with LED backlight and user-friendly touch screen. It provides two expansion slots to support PROFINET, PROFIBUS, DeviceNet, EtherNet/IP and EtherCAT protocols. The NEMA4/IP66 rated heavy-duty aluminum front bezel and the vibration-resistant rugged chassis are specifically designed for outdoor and harsh industrial environments. IPPC 1560TE is ideal for use in oil and gas rig, wind farms, chemical factories, pharmaceutical factories, and hazardous working area.

Specifications

Panel

- LCD Size: 15", 4:3
- Resolution: XGA 1024 x 768
- Luminance: 400cd/m²
- Contrast ratio: 700
- LCD color: 16.7M
- Viewing angle: 60 (U), 80 (D), 80 (L), 80 (R)
- Backlight: LED

Touch

- 5-wire resistive (flush panel type)
- Light transmission: 81%
- Interface: USB

System

- CPU: support 2nd/3rd gen. Intel® Core™ processor family, rPGA 988
 - Intel® Core™ i5-3610ME, Dual Core, 2.7GHz, 3M Cache (maximum frequency 3.3GHz if turbo boost enabled)
- BIOS: AMI BIOS
- System chipset: Intel® HM76 express chipset
- System memory: 1 x 204-pin DDR3 SO-DIMM socket, 4G DDR3 (default), support up to 8GB DDR3-1066/1333, non-ECC and un-buffered
- Storage device:
 - 1 x External locked CFast socket
 - 1 x Hard drive bay
- Watchdog timer: Watchdog timeout can be programmable by

software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)

- H/W status monitor: monitoring system temperature, and voltage
- Expansion:
 - 2 x mini-PCIe sockets (support optional Wi-Fi or 3.5G module)
 - 2 x expansion slots for add-on PCI or/and PCIe cards
 - 1 x PCI and 1 x PCIe x4 slots (default)
 - 2 x PCIe x4 slots
 - 2 x PCI slots

Rear I/O

- 2nd display VGA port: 1 x DB15
- Ethernet: 2 x RJ45
- USB: 4 x USB 2.0 (hidden)
- COM #1: RS232/422/485 w/ 2.5kv isolated protection
- COM #2: RS232/422/485 w/ 2.5kv isolated protection
- COM #3: RS232 w/ RI or 5V or 12V selection
- ATX power switch
- Reset button


Ethernet

- LAN chip: dual Intel® 82574L Gigabit LAN
- Ethernet interface: 10/100/1000 Base-Tx Ethernet compatible

Fieldbus

- Support up to two fieldbus module (1 universal kit and 1 special kit)

Dimension Drawing

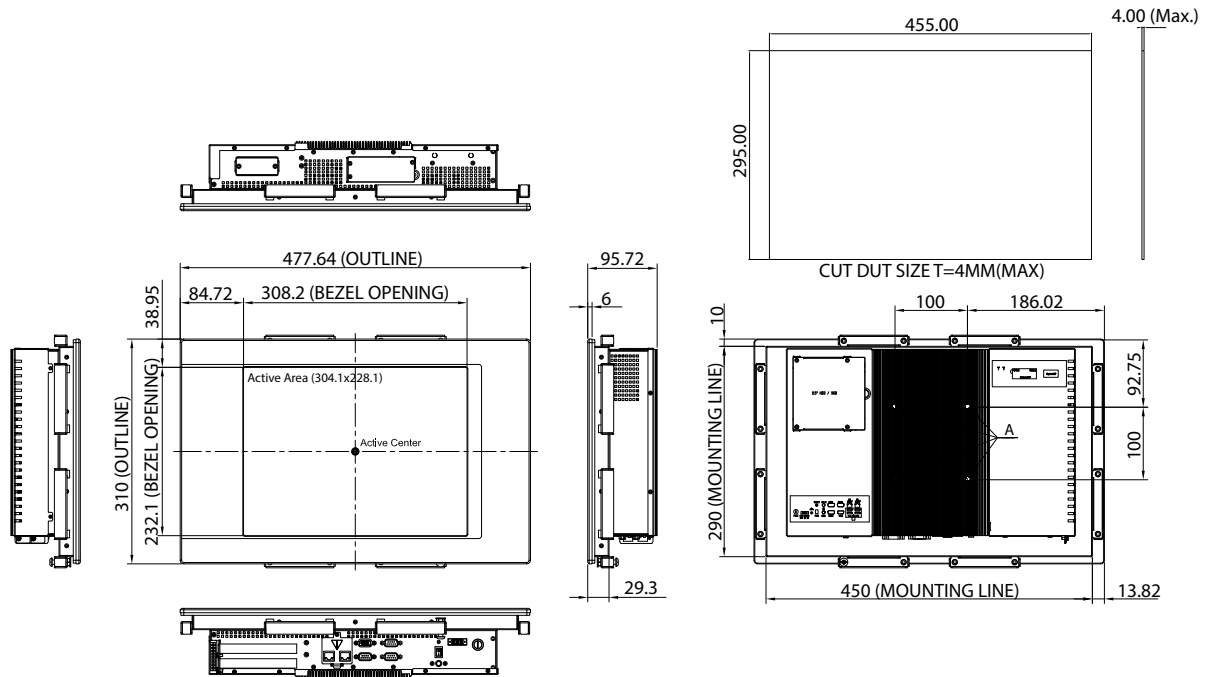

Mechanical & Environment

- Color: Pantone 432C\RAL 70 24 front bezel
- Enclosure: aluminum front bezel with SPPC nickel plated housing
- IP protection: IP65 front
- Mounting: panel/wall/stand/VESA 100mm x 100mm
- Power:
 - Power input: 24 VDC, 4A, Class 2
 - Power protection: $\pm 20\%$ with 1.5kv isolated protection
 - Fuse: 250V/10A
- Vibration:
 - IEC 68 2-64 (w/ HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
 - 2Grms @ sine, 5~500Hz, 1hr/axis (CFast operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G @ wall mount, half sine, 11ms
- Operating temperature: -10°C to 50°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing limits to be at 90% RH at max 50°C
- Dimension: 477.64 x 310 x 95.72mm
- Weight: 9.51Kg

Certifications

- CE (including EN61000-6-2/EN61000-6-4)
- FCC Class A
- UL508
- C1D2: USL-ANSI/ISA 12.12.01-2013
CNL-CSA C22.2 No. 213-M1987

OS Support Lists

- Windows 8 32-bit/64-bit
- Windows 7 32-bit/64-bit
- WinCE 7.0
- Windows XP 32-bit

Ordering Information

System

- **IPPC 1560TE (P/N: 10II1560T02X0)**
15" XGA LED backlight fanless touch panel PC, Intel® Core™ i5-3610ME 2.7GHz, touch screen, 4GB DDR3, 3 x COM, isolated protection DC power

Optional

- **24V/5A, 120W AC to DC DIN rail power adapter w/o power cord (P/N: 7440120001X00)**
- **Riser card 2 x PCI slots (P/N: 20JK036P200X0)**
- **Riser card 2 x PCIe x4 slots (P/N: 20JK036E200X2)**
- **PROFINET, EtherNet/IP, EtherCAT, SERCOSIII master interface module: FBI90E-REM (P/N:10J50090E08X0)**
- **PROFINET master interface module: FBI90E-PNM (P/N: 10J50090E21X0)**
- **PROFIBUS master interface module: FBI90E-PBM (P/N:10J50090E09X0)**
- **DeviceNet master interface module: FBI90E-DNM (P/N:10J50090E10X0)**
- **EtherCAT master interface module: FBI90E-ECM (P/N:10J50090E19X0)**
- **EtherNet/IP master interface module: FBI90E-EPM (P/N:10J50090E20X0)**



Main Features

- 4:3 15" XGA fanless panel computer
- Powerful 4th generation Intel® Core™ i processor
- Optional two expansion slots for add-on PCI or/and PCIe card
- Optional 3.5G/Wi-Fi module/2.5" HDD
- Front accessible USB 2.0 for easy of field maintenance
- Inside USB 2.0 type A connector for license key
- Metal housing with robust aluminum IP66 compliant front bezel for harsh environment
- Two FBI Windows
- Wide range 12~30VDC power input

Product Overview

IPPC A1570 series is a heavy industrial panel PC to support powerful 4th generation Intel® Core™ i processor, TFT LCD panel with LED backlight and user-friendly touch screen. It provides two expansion slots to support PROFINET, PROFIBUS, DeviceNet, EtherNet/IP and EtherCAT protocols. The IP66 rated heavy-duty aluminum front bezel and the vibration-resistant rugged chassis are specifically designed for outdoor and harsh industrial environments. IPPC A1570 series is ideal for use in oil and gas rig, wind farms, chemical factories, pharmaceutical factories, and hazardous working area.

Specifications

Panel

- LCD Size: 15", 4:3
- Resolution: XGA 1024 x 768
- Luminance: 450cd/m²
- Contrast ratio: 800
- LCD color: 16.2M
- Viewing angle: 70 (U), 80 (D), 80 (L), 80 (R)
- Backlight: LED

Touch

For IPPC A1570T Series

- 5-wire resistive (flush panel type)
- Light transmission: 81%
- Interface: USB

System

- CPU (optional): support 4th gen. Intel® Core™ i processor family, LGA1150 socket type
 - Core™ i5-4590T, Quad Core, 2.0GHz, 6M Cache (maximum frequency 3.0GHz if turbo boost enabled)
 - Core™ i5-4570TE, Dual Core, 2.7GHz, 4M Cache (maximum frequency 3.3GHz if turbo boost enabled)
 - Core™ i3-4350T, Dual Core, 3.1GHz, 4M Cache (no turbo boost)
 - Core™ i3-4340TE, Dual, Core, 2.6GHz, 4M Cache (no turbo boost)
 - Pentium® G3320TE, Dual Core, 2.3GHz, 3M Cache (no turbo boost)
 - Celeron® G1820TE, Dual Core, 2.2GHz, 2M Cache (no turbo boost)
- BIOS: AMI BIOS
- System chipset: Intel® Q87 PCH
- System memory (optional): 2 x 204-pin DDR3/DDR3L SO-DIMM socket, support up to 16GB DDR3/DDR3L 1333/1600, non-ECC and unbuffered
- Storage device:
 - 1 x External locked CFast socket

- 1 x mini-PCIe w/o SIM card holder slot to support mSATA storage
- 1 x Hard drive bay: support 1 x 2.5" SATA HDD/SSD (optional)
- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)
- H/W status monitor: monitoring system temperature and voltage
- Expansion:
 - 2 x mini-PCIe sockets (support optional Wi-Fi or 3.5G module/NVRAM/mSATA storage)
 - 2 x Expansion slots for add-on PCI or/and PCIe cards (optional)
 - 1 x PCI and 1 x PCIe x4 slots
 - 2 x PCIe x4 slots
 - 2 x PCI slots
 - 1 x PCIe x16 slot
- 1 x Front accessible USB 2.0

Rear I/O

- 1 x PS2 for keyboard/mouse
- Ethernet: 2 x RJ45
- 2nd/3rd display: additional independent DisplayPort: 1 x DVI-I (DVI-D + DVI-A) and 1 x DisplayPort
- Audio port: 1 x Line-out; 1 x Line-in; 1 x Mic-in
- USB: 4 x USB 3.0
- 3-pin remote power on/off switch connector
- Reset button
- COM#1: RS232/422/485 w/ 5V or 12V selection
- ATX power switch


Top I/O

- COM#2 RS232/422/485 w/ 5V or 12V selection

Audio

- HD codec: Realtek ALC886-GR

Dimension Drawing

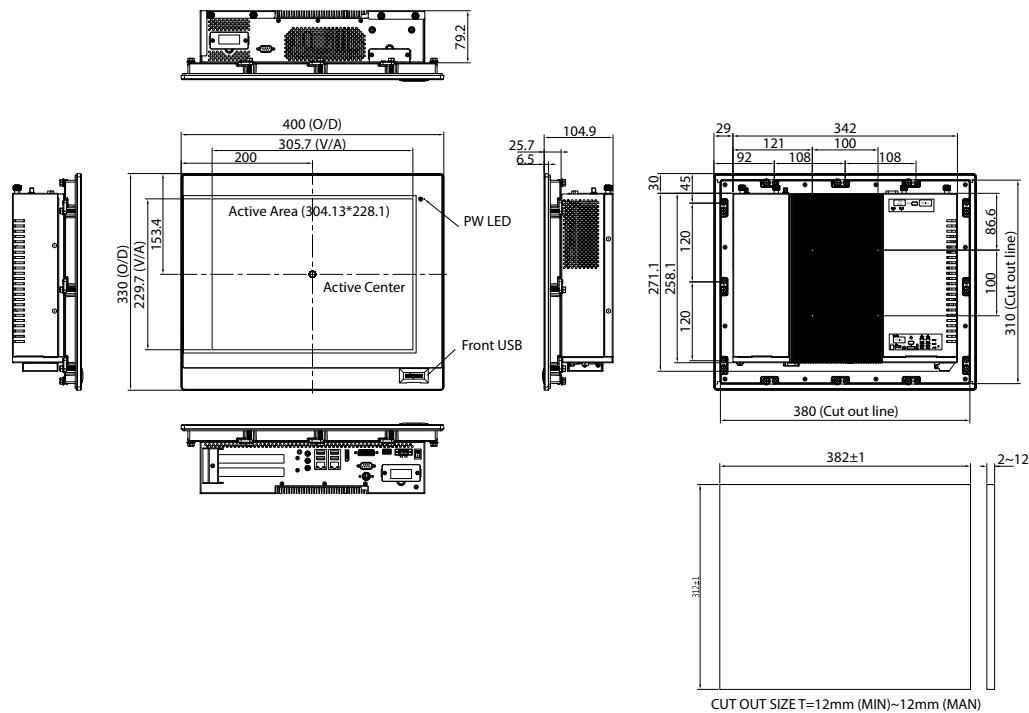

- Audio interface: Line-out/Line-in/Mic-in audio jack

Ethernet

- LAN chip: dual Intel® I210IT Gigabit LAN
- Ethernet interface: 10/100/1000 Base-Tx Ethernet compatible

Fieldbus

- Two FBI Windows

Mechanical & Environment

- Color: Pantone 432C\RAL 70 24 front bezel
- Enclosure: aluminum front bezel with SPPC nickel plated housing
- IP protection: IP66 front
- Mounting: panel/wall/stand/VESA 100mm x 100mm
- Power:
 - Power input: 12~30 VDC
 - Power connector: 3-pin PHOENIX connector
- Vibration:
 - IEC 68 2-64 (w/ HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
 - 2Grms @ sine, 5~500Hz, 1hr/axis (CFast operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G @ wall mount, half sine, 11ms
- Operating temperature
 - Resistive: -20°C to 50°C
 - P-Cap: -20°C to 50°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing (for IPPC A1570T series, limits to be at 90% RH at max 50°C)
- Dimension: 400 x 330 x 104.9 mm
- Weight: (barebone)
 - IPPC A1570TE2-DC: 8.99kg
 - IPPC A1570PE2-DC: 9.08kg

Certifications

- CE (including EN61000-6-2/EN61000-6-4), FCC Class A

OS Support Lists

- Windows 7 32-bit and 64-bit
- Windows 8.1 32-bit and 64-bit


Ordering Information

System

- **IPPC A1570T-DC (P/N: 10II1570T01X0)**
15" XGA LED backlight fanless RTP touch panel PC, 2 x COM, DC power input

Optional

- **24V, 120W AC/DC power adapter w/o power cord (P/N: 7400120023X00)**
- **ASSY NISK37P1E1, one PCI slot and one PCIe x4 slot riser card (P/N: 20JK037P100X0)**
- **ASSY NISK37P2, two PCI slots (P/N: 20JK037P200X0)**
- **ASSY NISK37E2, two PCIe x4 slot (P/N: 20JK037E200X0)**
- **ASSY NISK37E16, one PCIe x16 slot (P/N: 20JK037E100X0)**

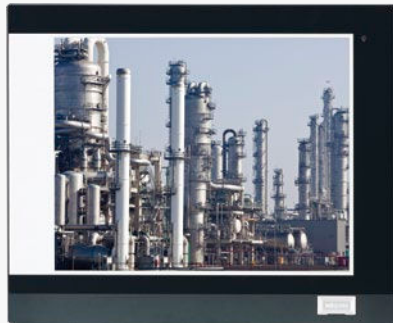

Main Features

- 4:3 17" SXGA fanless panel computer
- Powerful 4th generation Intel® Core™ i processor
- Optional two expansion slots for add-on PCI or/and PCIe card
- Optional 3.5G/Wi-Fi module/2.5" HDD
- Front accessible USB 2.0 for easy of field maintenance
- Inside USB 2.0 type A connector for license key
- Metal housing with robust aluminum IP66 compliant front bezel for harsh environment
- Two FBI Windows

Product Overview

IPPC A1770 series is a heavy industrial panel PC to support powerful 4th generation Intel® Core™ i processor, TFT LCD panel with LED backlight and user-friendly touch screen. It provides two expansion slots to support PROFINET, PROFIBUS, DeviceNet, EtherNet/IP and EtherCAT protocols. The IP66 rated heavy-duty aluminum front bezel and the vibration-resistant rugged chassis are specifically designed for outdoor and harsh industrial environments. IPPC A1770 series is ideal for use in oil and gas rig, wind farms, chemical factories, pharmaceutical factories, and hazardous working area.

Specifications

Panel

- LCD size: 17", 4:3
- Resolution: SXGA 1280 x 1024
- Luminance: 350cd/m²
- Contrast ratio: 1000
- LCD color: 16.7M
- Viewing angle: 80 (U), 80 (D), 85 (L), 85 (R)
- Backlight: LED

Touch

For IPPC A1770T Series

- 5-wire resistive (Flush panel type)
- Light transmission: 81%
- Interface: USB

System

- CPU (optional): support 4th gen. Intel® Core™ i processor family, LGA1150 socket type
 - Core™ i5-4590T, Quad Core, 2.0GHz, 6M Cache (maximum frequency 3.0GHz if turbo boost enabled)
 - Core™ i5-4570TE, Dual Core, 2.7GHz, 4M Cache (maximum frequency 3.3GHz if turbo boost enabled)
 - Core™ i3-4350T, Dual Core, 3.1GHz, 4M Cache (no turbo boost)
 - Core™ i3-4340TE, Dual, Core, 2.6GHz, 4M Cache (no turbo boost)
 - Pentium® G3320TE, Dual Core, 2.3GHz, 3M Cache (no turbo boost)
 - Celeron® G1820TE, Dual Core, 2.2GHz, 2M Cache (no turbo boost)
- BIOS: AMI BIOS
- System chipset: Intel® Q87 PCH
- System memory (optional): 2 x 204-pin DDR3/DDR3L SO-DIMM socket, support up to 16GB DDR3/DDR3L 1333/1600, non-ECC and unbuffered
- Storage device:
 - 1 x External locked CFast socket
 - 1 x mini-PCIe w/o SIM card holder slot to support mSATA storage
 - 1 x Hard drive bay: support 1 x 2.5" SATA HDD/SSD (optional) (for DC model only)
 - 2 x Hard drive bay: support 2 x 2.5" SATA HDD/SSD (optional)

- RAID 0, 1 (for AC model only)
- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)
- H/W status monitor: monitoring system temperature and voltage
- Expansion:
 - 2 x mini-PCIe sockets (support optional Wi-Fi or 3.5G module/NVRAM/mSATA storage)
 - 2 x Expansion slots for add-on PCI or/and PCIe cards (optional)
 - 1 x PCI and 1 x PCIe x4 slots
 - 2 x PCIe x4 slots
 - 2 x PCI slots
 - 1 x PCIe x16 slot
- 1 x Front accessible USB 2.0

Rear I/O

- 1 x PS2 for keyboard/mouse
- Ethernet: 2 x RJ45
- 2nd/3rd display: additional independent DisplayPort: 1 x DVI-I (DVI-D + DVI-A) and 1 x DisplayPort
- Audio port: 1 x Line-out; 1 x Line-in; 1 x Mic-in
- USB: 4 x USB3.0
- 3-pin remote power on/off switch connector
- Reset button
- COM#1: RS232/422/485 w/ 5V or 12V selection
- ATX power switch

Top I/O

- COM#2 RS232/422/485 w/ 5V or 12V selection


Audio

- HD codec: Realtek ALC886-GR
- Audio interface: Line-out/Line-in/Mic-in audio jack

Ethernet

- LAN chip: dual Intel® I210IT Gigabit LAN
- Ethernet interface: 10/100/1000 Base-Tx Ethernet compatible

Dimension Drawing

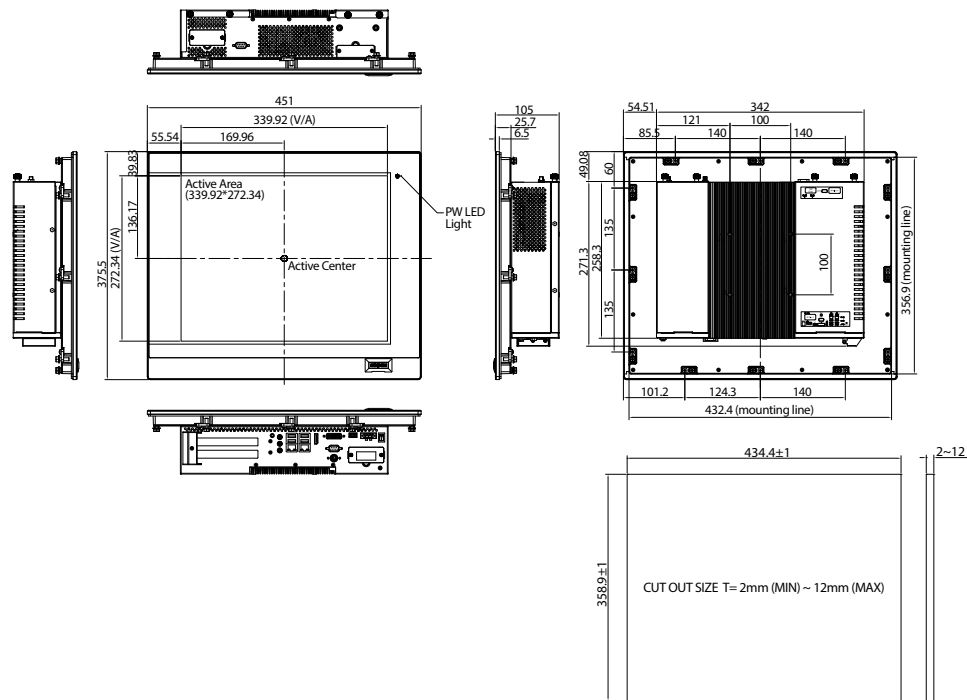

Fieldbus

- Two FBI Windows

Mechanical & Environment

- Color: Pantone 432C/RAL 70 24 front bezel
- Enclosure: aluminum front bezel with SPPC nickel plated housing
- IP protection: IP66 front
- Mounting: panel/wall/stand/VESA 100mm x 100mm
- Power:
 - Power input: 12~30 VDC
 - Power connector: 3-pin PHOENIX connector
- Vibration:
 - IEC 68 2-64 (w/ HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
 - 2Grms @ sine, 5~500Hz, 1hr/axis (CFast operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G @ wall mount, half sine, 11ms
- Operating temperature:
 - Resistive: -10°C to 50°C
 - P-Cap: -20°C to 50°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing (for IPPC A1770T series, limits to be at 90% RH at max 50°C)
- Dimension
 - IPPC A1770TE2-DC/PE2-DC/TFE2-DC: 451 x 375.5 x 105mm
- Weight: (barebone)
 - IPPC A1770TE2-DC: 9.54kg

Certifications

- CE (including EN61000-6-2/EN61000-6-4), FCC Class A

OS Support Lists

- Windows 7 32-bit and 64-bit
- Windows 8.1 32-bit and 64-bit

Ordering Information

System

- **IPPC A1770T-DC (P/N: 10II1770T03X0)**
17" SXGA LED backlight fanless RTP touch panel PC, 2 x COM, DC power input

Optional

- **24V, 120W AC/DC power adapter w/o power cord (P/N: 7400120023X00)**
- **ASSY NISK37P1E1, one PCI slot and one PCIe x4 slot riser card (P/N: 20JK037P100X0)**
- **ASSY NISK37P2, two PCI slots (P/N: 20JK037P200X0)**
- **ASSY NISK37E2, two PCIe x4 slot (P/N: 20JK037E200X0)**
- **ASSY NISK37E16, one PCIe x16 slot (P/N: 20JK037E100X0)**



Main Features

- 4:3 19" SXGA fanless panel computer
- Powerful 4th generation Intel® Core™ i processor
- Optional two expansion slots for add-on PCI or/and PCIe card
- Optional 3.5G/Wi-Fi module/2.5" HDD
- Front accessible USB 2.0 for easy of field maintenance
- Inside USB 2.0 type A connector for license key
- Metal housing with robust aluminum IP66 compliant front bezel for harsh environment
- Two FBI Windows
- Wide range 12~30VDC power input

Product Overview

IPPC A1970 series is a heavy industrial panel PC to support powerful 4th generation Intel® Core™ i processor, TFT LCD panel with LED backlight and user-friendly touch screen. It provides two expansion slots to support PROFINET, PROFIBUS, DeviceNet, EtherNet/IP and EtherCAT protocols. The IP66 rated heavy-duty aluminum front bezel and the vibration-resistant rugged chassis are specifically designed for outdoor and harsh industrial environments. IPPC A1970 series is ideal for use in oil and gas rig, wind farms, chemical factories, pharmaceutical factories, and hazardous working area.

Specifications

Panel

- LCD size: 19", 4:3
- Resolution: SXGA 1280 x 1024
- Luminance: 350cd/m²
- Contrast ratio: 1000
- LCD color: 16.7M
- Viewing angle: 80 (U), 80 (D), 85 (L), 85 (R)
- Backlight: LED

Touch

For IPPC A1970T Series

- 5-wire resistive (Flush panel type)
- Light transmission: 80±3%
- Interface: USB

System

- CPU (optional): support 4th gen. Intel® Core™ i processor family, LGA1150 socket type
 - Core™ i5-4590T, Quad Core, 2.0GHz, 6M Cache (maximum frequency 3.0GHz if turbo boost enabled)
 - Core™ i5-4570TE, Dual Core, 2.7GHz, 4M Cache (maximum frequency 3.3GHz if turbo boost enabled)
 - Core™ i3-4350T, Dual Core, 3.1GHz, 4M Cache (no turbo boost)
 - Core™ i3-4340TE, Dual, Core, 2.6GHz, 4M Cache (no turbo boost)
 - Pentium® G3320TE, Dual Core, 2.3GHz, 3M Cache (no turbo boost)
 - Celeron® G1820TE, Dual Core, 2.2GHz, 2M Cache (no turbo boost)
- BIOS: AMI BIOS
- System chipset: Intel® Q87 PCH
- System memory (optional): 2 x 204-pin DDR3/DDR3L SO-DIMM socket, support up to 16GB DDR3/DDR3L 1333/1600, non-ECC and unbuffered


Storage device:

- 1 x External locked CFast socket
- 1 x mini-PCIe w/o SIM card holder slot to support mSATA storage
- 1 x Hard drive bay: support 1 x 2.5" SATA HDD/SSD (optional)
- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)
- H/W status monitor: monitoring system temperature and voltage
- Expansion:
 - 2 x mini-PCIe sockets (support optional Wi-Fi or 3.5G module/NVRAM/mSATA storage)
 - 2 x Expansion slots for add-on PCI or/and PCIe cards (optional)
 - 1 x PCI and 1 x PCIe x4 slots
 - 2 x PCIe x4 slots
 - 2 x PCI slots
 - 1 x PCIe x16 slot
- 1 x Front accessible USB 2.0

Rear I/O

- 1 x PS2 for keyboard/mouse
- Ethernet: 2 x RJ45
- 2nd/3rd display: additional independent DisplayPort: 1 x DVI-I (DVI-D + DVI-A) and 1 x DisplayPort
- Audio port: 1 x Line-out; 1 x Line-in; 1 x Mic-in
- USB: 4 x USB 3.0
- 3-pin remote power on/off switch connector
- Reset button
- COM#1: RS232/422/485 w/ 5V or 12V selection
- ATX power switch

Dimension Drawing

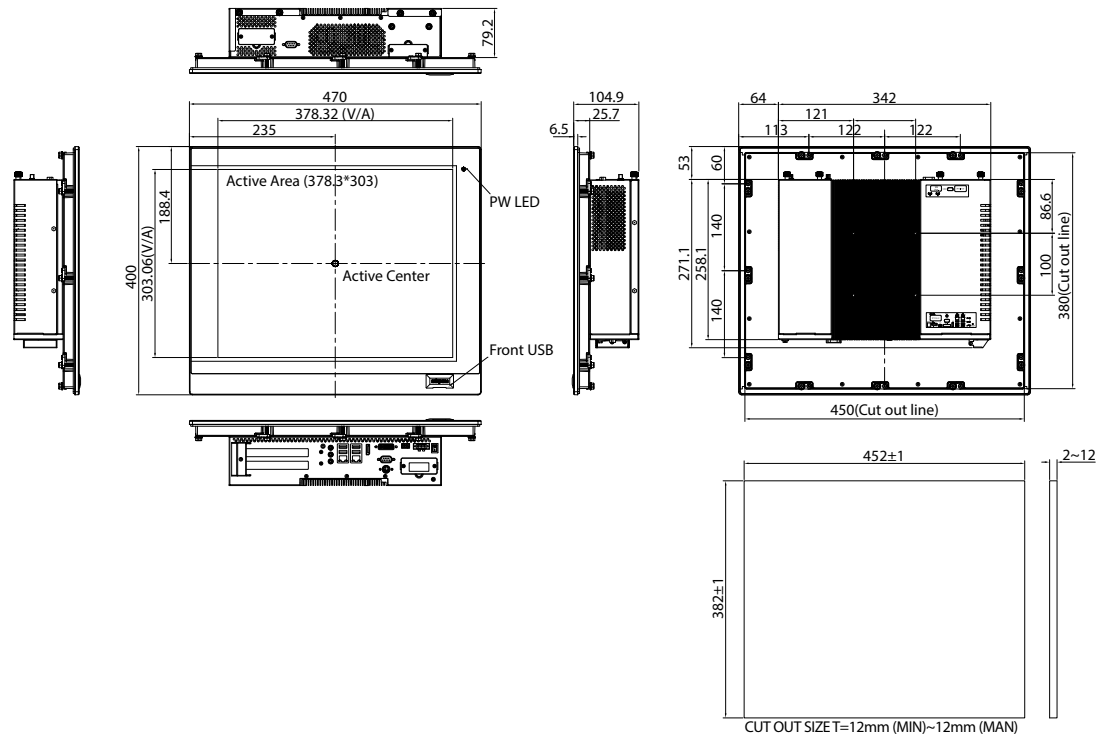

Top I/O

- COM#2 RS232/422/485 w/ 5V or 12V selection

Audio

- HD codec: Realtek ALC886-GR
- Audio interface: Line-out/Line-in/Mic-in audio jack

Ethernet

- LAN chip: dual Intel® I210IT Gigabit LAN
- Ethernet interface: 10/100/1000 Base-Tx Ethernet compatible

Fieldbus

- Two FBI Windows

Mechanical & Environment

- Color: Pantone 432C\RAL 70 24 front bezel
- Enclosure: aluminum front bezel with SPCC nickel plated housing
- IP protection: IP66 front
- Mounting: panel/wall/stand/VESA 100mm x 100mm
- Power:
 - Power input: 12~30 VDC
 - Power connector: 3-pin PHOENIX connector
- Vibration:
 - IEC 68 2-64 (w/ HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
 - 2Grms @ sine, 5~500Hz, 1hr/axis (CFast operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G @ wall mount, half sine, 11ms
- Operating temperature:
 - Resistive: -10°C to 50°C
 - P-Cap: -20°C to 50°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing (for IPPC A1970T series, limits to be at 90% RH at max 50°C)
- Dimension: 470 x 400 x 104.9 mm
- Weight: (barebone)
IPPC A1970TE2-DC: 10.25kg

Certifications

- CE (including EN61000-6-2/EN61000-6-4)
- FCC Class A

OS Support Lists

- Windows 7 32-bit and 64-bit
- Windows 8.1 32-bit and 64-bit

Ordering Information

System

- **IPPC A1970T-DC (P/N: 10II1970T00X0)**
19" SXGA LED backlight fanless RTP touch panel PC, 2 x COM, DC power input

Optional

- **24V, 120W AC/DC power adapter w/o power cord (P/N: 7400120023X00)**
- **ASSY NISK37P1E1, one PCI slot and one PCIe x4 slot riser card (P/N: 20JK037P100X0)**
- **ASSY NISK37P2, two PCI slots (P/N: 20JK037P200X0)**
- **ASSY NISK37E2, two PCIe x4 slot (P/N: 20JK037E200X0)**
- **ASSY NISK37E16, one PCIe x16 slot (P/N: 20JK037E100X0)**



Main Features

- 16:9 WXGA, 1366 x 768 fanless panel computer
- Powerful 4th generation Intel® Core™ i processor
- Optional two expansion slots for add-on PCI or/and PCIe cards
- Optional 3.5G/Wi-Fi module/2.5" HDD
- Inside USB 2.0 type A connector for license key
- Metal housing with robust aluminum IP66 compliant front bezel for harsh environment
- Two FBI Windows

Product Overview

IPPC 1670P is a heavy industrial panel PC to support powerful 4th generation Intel® Core™ i processor, TFT LCD panel with LED backlight and userfriendly touch screen. It provides two expansion slots to support PROFINET, PROFIBUS, DeviceNet, EtherNet/IP and EtherCAT protocols. The IP66 rated heavy-duty aluminum front bezel and the vibration-resistant rugged chassis are specifically designed for outdoor and harsh industrial environments. IPPC 1670P is ideal for use in oil and gas rig, wind farms, chemical factories, pharmaceutical factories, and hazardous working area.

Specifications

Panel

- LCD size: 15.6", 16:9
- Resolution: WXGA, 1366 x 768
- Luminance: 300cd/m²
- Contrast ratio: 500
- LCD color: 16.7M
- Viewing angle: 80(U), 80(D), 85(L), 85(R)
- Backlight: LED

Touch (for IPPC 1670P Series)

- Ten points P-Cap (projected capacitive touch)
- Light transmission: 87%
- Interface: USB
- Anti-scratch surface: >= 6H hardness

System

- CPU (optional): support 4th gen. Intel® Core™ i processor family, LGA1150 socket type
 - Core™ i5-4590T, Quad Core, 2.0GHz, 6M Cache (maximum frequency 3.0GHz if turbo boost enabled)
 - Core™ i5-4570TE, Dual Core, 2.7GHz, 4M Cache (maximum frequency 3.3GHz if turbo boost enabled)
 - Core™ i3-4350T, Dual Core, 3.1GHz, 4M Cache (no turbo boost)
 - Core™ i3-4340TE, Dual, Core, 2.6GHz, 4M Cache (no turbo boost)
 - Pentium® G3320TE, Dual Core, 2.3GHz, 3M Cache (no turbo boost)
 - Celeron® G1820TE, Dual Core, 2.2GHz, 2M Cache (no turbo boost)
- BIOS: AMI BIOS
- System chipset: Intel® Q87 PCH
- System memory (optional): 2 x 204-pin DDR3/DDR3L SO-DIMM


socket, support up to 16GB DDR3/DDR3L 1333/1600, non-ECC and unbuffered

- Storage device:
 - 1 x External locked CFast socket
 - 1 x mini-PCIe w/o SIM card holder slot to support mSATA storage
 - 1 x Hard drive bay: support 1 x 2.5" SATA HDD/SSD (optional)(for DC model only)
- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)
- H/W status monitor: monitoring system temperature and voltage
- Expansion:
 - 2 x mini-PCIe sockets (support optional Wi-Fi or 3.5G module/NVRAM/mSATA storage)
 - 2 x Expansion slots for add-on PCI or/and PCIe cards (optional)
 - 1 x PCI and 1 x PCIe x4 slots
 - 2 x PCIe x4 slots
 - 2 x PCI slots
 - 1 x PCIe x16 slot

Rear I/O

- 1 x PS/2 for keyboard/mouse
- Ethernet: 2 x RJ45
- 2nd/3rd display: additional independent DisplayPort: 1 x DVI-I (DVI-D + DVI-A) and 1 x DisplayPort
- Audio port: 1 x Line-out; 1 x Line-in; 1 x Mic-in
- USB: 4 x USB3.0
- 3-pin remote power on/off switch connector
- Reset button

Dimension Drawing

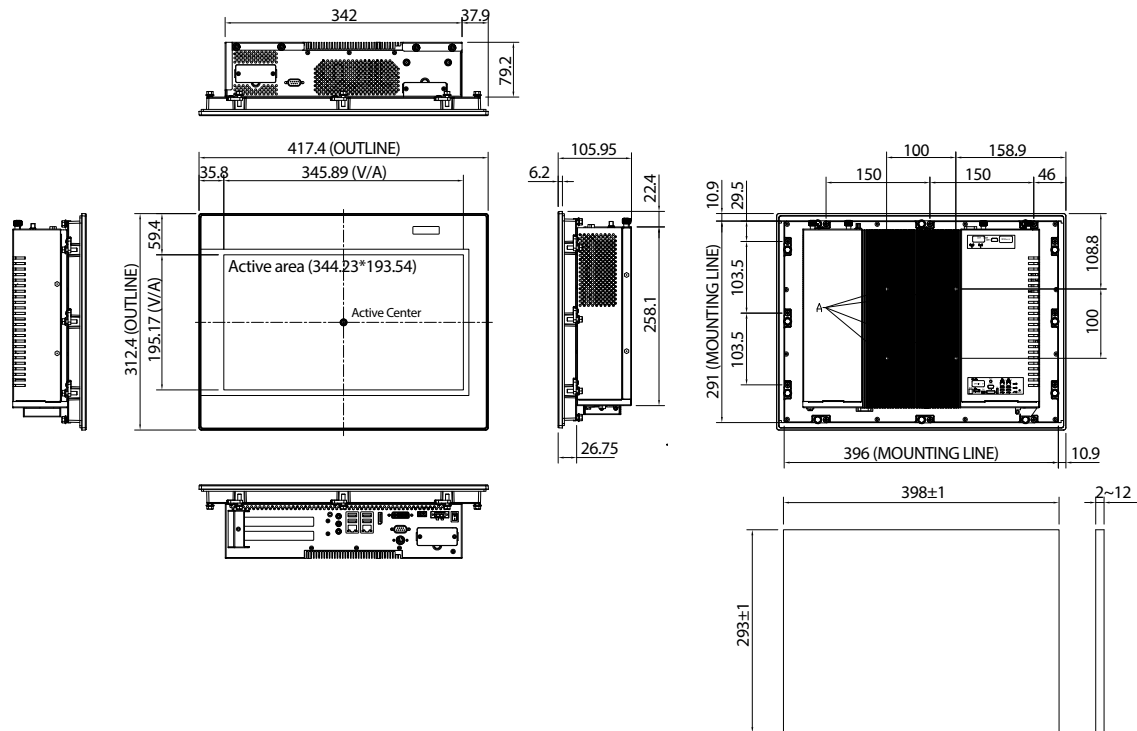

- COM#1: RS232/422/485 w/ 5V or 12V selection (for T/P-DC only)
- ATX power switch (for T/P-DC only)

Top I/O

- COM#2 RS232/422/485 w/ 5V or 12V selection (for T/P-DC only)

Audio

- HD codec: Realtek ALC886-GR
- Audio interface: Line-out/Line-in/Mic-in audio jack

Ethernet

- LAN chip: dual Intel® I210T Gigabit LAN
- Ethernet interface: 10/100/1000 Base-Tx Ethernet compatible

Fieldbus

- Two FBI Windows

Mechanical & Environment

- Color: Pantone 432C\RAL 70 24 front bezel
- Enclosure: aluminum front bezel with SPPC nickel plated housing
- IP protection: IP66 front
- Mounting: panel/wall/stand/VESA 100mm x 100mm
- Power: IPPC 1670P
 - Power input: 12~30 VDC
 - Power connector: 3-pin PHOENIX connector
- Vibration:
 - IEC 68 2-64 (w/ HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
 - 2Grms @ sine, 5~500Hz, 1hr/axis (CFast operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G @ wall mount, half sine, 11ms
- Operating temperature: Resistive: -10°C to 50°C
 - P-Cap: -10°C to 50°C
 - Storage temperature: -20°C to 75°C
 - Operating humidity: 10%~90% relative humidity, non-condensing

Dimension

- (for IPPC 1670P series, limits to be at 90% RH at max 50°C)
- 417.4 x 312.4 x 105.95mm
- Weight: (barebone): 9.18kg

Certifications

- CE (including EN61000-6-2/EN61000-6-4), FCC Class A

OS Support Lists

- Windows 7 32-bit and 64-bit
- Windows 8.1 32-bit and 64-bit
- Windows 10 32-bit and 64-bit

Ordering Information

System

- **IPPC 1670P-DC (P/N: 10II1670P01X0)**
15.6" WXGA LED backlight fanless P-CAP touch panel PC, 2 x COM, DC power input

Options

- **24V, 120W AC/DC power adapter w/o power cord (P/N: 7400120023X00)**
- **ASSY NISK37P1E1, one PCI slot and one PCIe x4 slot riser card (P/N: 20JK037P100X0)**
- **ASSY NISK37P2, two PCI slots (P/N: 20JK037P200X0)**
- **ASSY NISK37E2, two PCIe x4 slot (P/N: 20JK037E200X0)**
- **ASSY NISK37E16, one PCIe x16 slot (P/N: 20JK037E100X0)**



Main Features

- 16:9 Full HD, 1920 x 1080 fanless panel computer
- Powerful 4th generation Intel® Core™ i processor
- Optional two expansion slots for add-on PCI or/and PCIe cards
- Optional 3.5G/Wi-Fi module/2.5" HDD
- Inside USB 2.0 type A connector for license key
- Metal housing with robust aluminum IP66 compliant front bezel for harsh environment
- Two FBI Windows

Product Overview

IPPC 2170P is a heavy industrial panel PC to support powerful 4th generation Intel® Core™ i processor, TFT LCD panel with LED backlight and userfriendly touch screen. It provides two expansion slots to support PROFINET, PROFIBUS, DeviceNet, EtherNet/IP and EtherCAT protocols. The IP66 rated heavy-duty aluminum front bezel and the vibration-resistant rugged chassis are specifically designed for outdoor and harsh industrial environments. IPPC 2170P is ideal for use in oil and gas rig, wind farms, chemical factories, pharmaceutical factories, and hazardous working area.

Specifications

Panel

- LCD size: 21.5", 16:9
- Resolution: Full HD, 1920 x 1080
- Luminance: 300cd/m²
- Contrast ratio: 5000
- LCD color: 16.7M
- Viewing angle: 89(U), 89(D), 89(L), 89(R)
- Backlight: LED

Touch (for IPPC 2170P Series)

- Ten points P-Cap (projected capacitive touch)
- Light transmission: 87%
- Interface: USB
- Anti-scratch surface: >= 6H hardness

System

- CPU (optional): support 4th gen. Intel® Core™ i processor family, LGA1150 socket type
 - Core™ i5-4590T, Quad Core, 2.0GHz, 6M Cache (maximum frequency 3.0GHz if turbo boost enabled)
 - Core™ i5-4570TE, Dual Core, 2.7GHz, 4M Cache (maximum frequency 3.3GHz if turbo boost enabled)
 - Core™ i3-4350T, Dual Core, 3.1GHz, 4M Cache (no turbo boost)
 - Core™ i3-4340TE, Dual, Core, 2.6GHz, 4M Cache (no turbo boost)
 - Pentium® G3320TE, Dual Core, 2.3GHz, 3M Cache (no turbo boost)
 - Celeron® G1820TE, Dual Core, 2.2GHz, 2M Cache (no turbo boost)
- BIOS: AMI BIOS
- System chipset: Intel® Q87 PCH
- System memory (optional): 2 x 204-pin DDR3/DDR3L SO-DIMM


socket, support up to 16GB DDR3/DDR3L 1333/1600, non-ECC and unbuffered

- Storage device:
 - 1 x External locked CFast socket
 - 1 x mini-PCIe w/o SIM card holder slot to support mSATA storage
 - 1 x Hard drive bay: support 1 x 2.5" SATA HDD/SSD (optional)(for DC model only)
- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)
- H/W status monitor: monitoring system temperature and voltage
- Expansion:
 - 2 x mini-PCIe sockets (support optional Wi-Fi or 3.5G module/NVRAM/mSATA storage)
 - 2 x Expansion slots for add-on PCI or/and PCIe cards (optional)
 - 1 x PCI and 1 x PCIe x4 slots
 - 2 x PCIe x4 slots
 - 2 x PCI slots
 - 1 x PCIe x16 slot

Rear I/O

- 1 x PS2 for keyboard/mouse
- Ethernet: 2 x RJ45
- 2nd/3rd display: additional independent DisplayPort: 1 x DVI-I (DVI-D + DVI-A) and 1 x DisplayPort
- Audio port: 1 x Line-out; 1 x Line-in; 1 x Mic-in
- USB: 4 x USB3.0
- 3-pin remote power on/off switch connector
- Reset button

Dimension Drawing

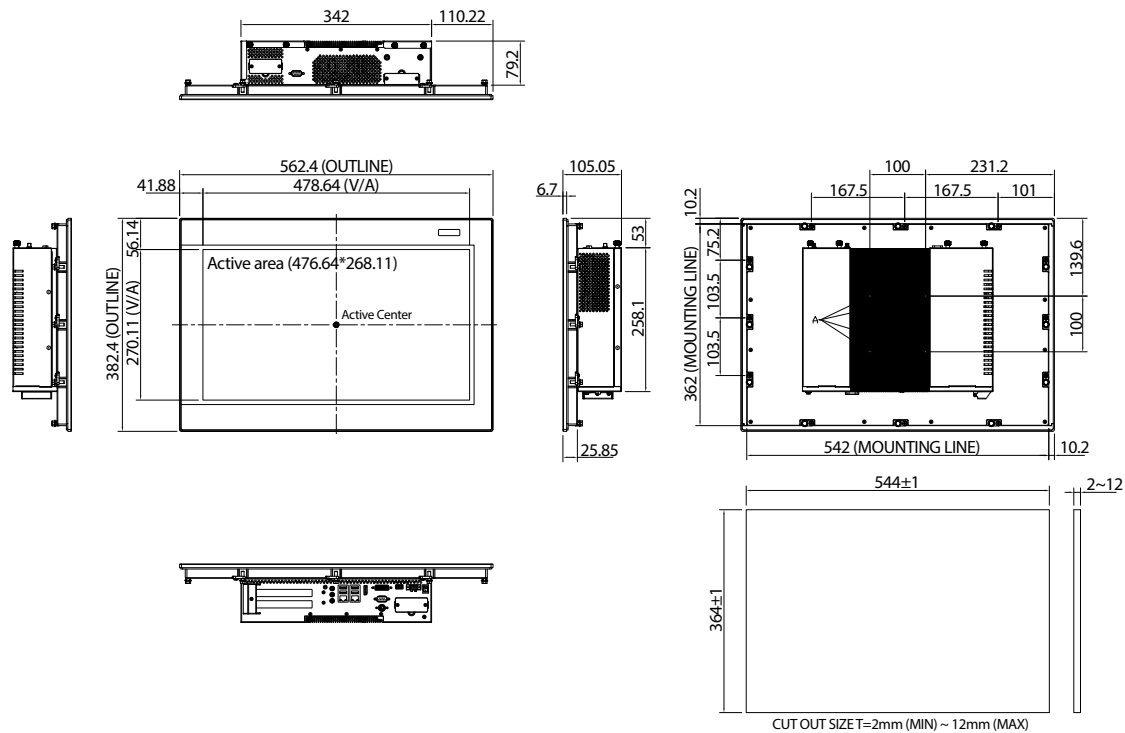

- COM#1: RS232/422/485 w/ 5V or 12V selection (for T/P-DC only)
- ATX power switch (for T/P-DC only)

Top I/O

- COM#2 RS232/422/485 w/ 5V or 12V selection (for T/P-DC only)

Audio

- HD codec: Realtek ALC886-GR
- Audio interface: Line-out/Line-in/Mic-in audio jack

Ethernet

- LAN chip: dual Intel® I210IT Gigabit LAN
- Ethernet interface: 10/100/1000 Base-Tx Ethernet compatible

Fieldbus

- Two FBI Windows

Mechanical & Environment

- Color: Pantone 432C\RAL 70 24 front bezel
- Enclosure: aluminum front bezel with SPCC nickel plated housing
- IP protection: IP66 front
- Mounting: panel/wall/stand/VESA 100mm x 100mm
- Power: IPPC 2170P
 - Power input: 12~30 VDC
 - Power connector: 3-pin PHOENIX connector
- Vibration:
 - IEC 68 2-64 (w/ HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
 - 2Grms @ sine, 5~500Hz, 1hr/axis (CFast operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G @ wall mount, half sine, 11ms
- Operating temperature:
 - Resistive: -10°C to 50°C
 - P-Cap: -10°C to 50°C
 - Storage temperature: -20°C to 75°C
 - Operating humidity: 10%~90% relative humidity, non-condensing (for IPPC 2170P series, limits to be at 90% RH at max 50°C)

Dimension

- 562.4 x 382.4 x 105.05mm
- Weight: (barebone): 11.7kg

Certifications

- CE (including EN61000-6-2/EN61000-6-4), FCC Class A

OS Support Lists

- Windows 7 32-bit and 64-bit
- Windows 8.1 32-bit and 64-bit
- Windows 10 32-bit and 64-bit

Ordering Information

System

- **IPPC 2170P-DC (P/N: 10I12170P01X0)**
21.5" Full HD WXGA LED backlight fanless P-CAP touch panel PC,
2 x COM, DC power input

Options

- **24V, 120W AC/DC power adapter w/o power cord (P/N: 7400120023X00)**
- **ASSY NISK37P1E1, one PCI slot and one PCIe x4 slot riser card (P/N: 20JK037P100X0)**
- **ASSY NISK37P2, two PCI slots (P/N: 20JK037P200X0)**
- **ASSY NISK37E2, two PCIe x4 slot (P/N: 20JK037E200X0)**
- **ASSY NISK37E16, one PCIe x16 slot (P/N: 20JK037E100X0)**

IPPC 1640P

15.6" TFT WXGA 16:9 Heavy Industrial Panel PC
with Intel® Celeron® Quad Core Processor J1900, up to 2.42GHz,
Multi-Touch Screen, 4GB DDR3L, 3 x USB, 2 x COM and Fieldbus Port



Main Features

- Intel® Celeron® quad core processor J1900, up to 2.42GHz, 2M L2 cache
- Metal housing with robust aluminum front zero bezel for harsh environment
- 10 points P-Cap multi-touch with zero bezel flush front design
- Dual GbE/2nd display-VGA/ Line-out/PS2 KB/MS
- USB x 3/2 x mini-PCIe sockets/1 x CFAST/2 x RS232/422/485
- DDR3L 4GB/2.5" HDD bracket
- IP66 compliant front panel
- Support fieldbus module, JMobile HMI and CODESYS SoftLogic (optional)
- Mounting support: panel/wall/stand/VESA 100mm x 100mm
- Wide range power input 12~30VDC

Product Overview

The 15.6" fanless panel PC IPPC 1640P incorporating an industrial motherboard is intended for versatile industrial applications. The panel PC has a touch screen LED backlight LCD panel with 1366x768 (HD; WXGA) resolution. The front panel which adopts flush design and complies with IP66 standard makes it the perfect fit in industrial applications.

The IPPC 1640P supports WWAN/WLAN expansion and others via dual Gigabit Ethernet connectors, two mini-PCIe slots and one SIM card holder. With support for wide power input of 12~30VDC, IPPC 1640P can gain a strong foothold in industrial field and machine devices. In addition, IPPC 1640P can hook 2nd display via a VGA port for dual independent display. IPPC 1640P has two isolated RS232/422/485 ports and optional fieldbus ports.

Specifications

Panel

- LCD size: 15.6", 16:9
- Resolution: WXGA 1366 x 768
- Luminance: 300cd/m²
- Contrast ratio: 500
- LCD color: 16.7M
- Viewing angle: 80 (U), 80 (D), 85 (L), 85 (R)
- Backlight: LED

Touch

- Ten points P-Cap (projected capacitive touch)
- Touch light transmission: 87%
- Anti-scratch surface: 7H hardness
- Touch interface: USB
- Windows 8 compliance

System

- CPU: onboard Intel® Celeron® Quad Core processor J1900, 2.0GHz, 2M L2 Cache (maximum frequency 2.42GHz if turbo boost enabled)
- BIOS: AMI BIOS
- System memory: 2 x 204-pin DDR3L SO-DIMM socket, 4GB DDR3L (default), support up to 8GB DDR3L-1066/1333, non-ECC and un-buffered


Storage device:

- 1 x External locked CFAST socket
- 1 x Hard drive bay: optional 1 x 2.5" SATA HDD or 1 x SATA DOM
- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)
- H/W status monitor: monitoring system temperature, and voltage
- Expansion: 2 x mini-PCIe sockets (support optional Wi-Fi, 3.5G module or fieldbus card)
- Panel backlight control button: increase brightness/decrease brightness/backlight on/off
- Front logo LED indicator to show operating status

Rear I/O

- Ethernet: 2 x RJ45
- 2nd display VGA port: 1 x DB15
- Audio port: 1 x Line-out
- USB: 2 x USB 2.0, 1 x USB 3.0
- 2-pin remote power on/off switch
- Power switch
- Reset button
- COM #1: RS232/422/485 w/ 2.5kv isolated
- COM #2: RS232/422/485 w/ 2.5kv isolated
- Fieldbus: (protocol interface optional)

Dimension Drawing

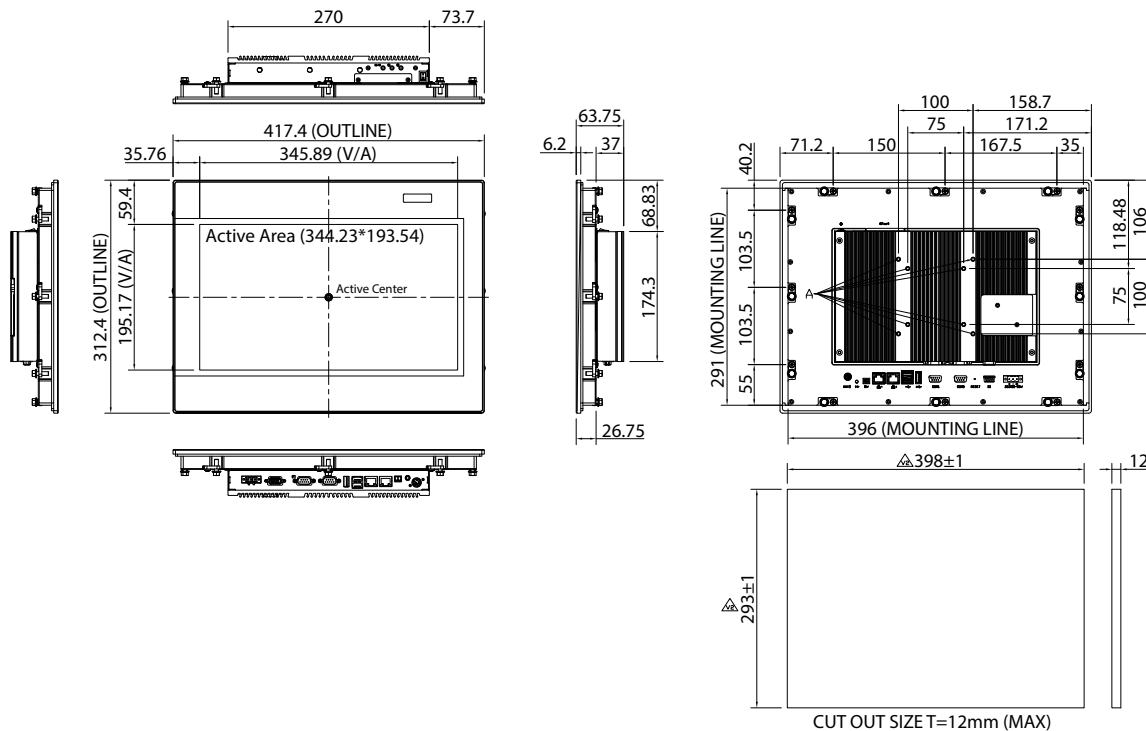

Model	Protocol	Connector
FBI90E-PNM	PROFINET Master	Dual RJ-45
FBI90E-EP	EtherNet/IP Master	
FBI90E-ECM	EtherCAT Master	DB9
FBI90E-PBM	PROFIBUS Master	
FBI90E-DNM	DeviceNet Master	5-pins PHOENIX contact terminal

Audio

- HD codec: Realtek ALC886-GR
- Audio interface: Line-out audio jack

Ethernet

- LAN chip: dual Intel® I210AT Gigabit LAN
- Ethernet interface: 10/100/1000 based-Tx Ethernet compatible

Mechanical & Environment

- Color: Pantone 432C/RAL 70 24 front bezel
- IP protection: IP66 front
- Mounting: panel/wall/stand/VESA 100mm x 100mm
- System with panel mounting kit w/o panel mounting hole
- Power input: 12~30VDC
- Power adapter: optional AC to DC power adapter (+12V, 60W)
- Vibration:
 - IEC 68 2-64 (w/ HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
 - 2Grms @ sine, 5~500Hz, 1hr/axis (CFast operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G@wall mount, half sine, 11ms
- Operating temperature: -10°C to 60°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing
- Dimension: 417.4 x 312.4 x 63.75mm
- Weight: 6.4Kg

Certifications

- CE (including EN61000-6-2/EN61000-6-4)
- FCC class A

OS Support Lists

- Windows 8 32-bit/64-bit
- Windows 7 32-bit/64-bit
- WinCE 7.0

Ordering Information

Barebone

- **IPPC 1640P (P/N: 10I1640P00X0)**
15.6" WXGA LED backlight touch panel PC, Intel® Celeron® quad core processor J1900, up to 2.42GHz, touch screen, 4GB DDR3L, 2 x RS232/422/485 and brightness adjustment buttons, optional fieldbus module

Options

- **12V, 60W AC/DC power adapter w/o power cord (P/N: 7400060031X00)**
- **PROFINET Master interface module: FBI90E-PNM for APPC (P/N: 88IA1932T00X0)**
- **EtherNet/IP Master interface module: FBI90E-EP for APPC (P/N: 88IA1932T01X0)**
- **EtherCAT Master interface module: FBI90E-ECM for APPC (P/N: 88IA1932T02X0)**
- **PROFIBUS Master interface module: FBI90E-PBM for APPC (P/N: 88IA1932T03X0)**
- **DeviceNet Master interface module: FBI90E-DNM for APPC (P/N: 88IA1932T04X0)**

IPPC 2140P

21.5" TFT WXGA 16:9 Heavy Industrial Panel PC
with Intel® Celeron® quad core processor J1900, up to 2.42GHz,
Multi-Touch Screen, 4GB DDR3L, 3 x USB, 2 x COM and Fieldbus Port



Main Features

- Intel® Celeron® quad core processor J1900, up to 2.42GHz, 2M L2 Cache
- Metal housing with robust aluminum front zero bezel for harsh environment
- 10 points P-Cap multi-touch with zero bezel flush front design
- Dual GbE/2nd display-VGA/ Line-out/PS2 KB/MS
- USB x 3/2 x mini-PCIe sockets/1 x CFast/2 x RS232/422/485
- DDR3L 4GB/2.5" HDD bracket
- IP66 compliant front panel
- Support fieldbus module, JMobile HMI and CODESYS SoftLogic (optional)
- Mounting support: panel/wall/stand/VESA 100mm x 100mm
- Wide range power input 12~30VDC

Product Overview

The 21.5" fanless panel PC IPPC 2140P incorporating an industrial motherboard is intended for versatile industrial applications. The panel PC has a touch screen LED backlight LCD panel with 1920 x 1080 (Full HD) resolution. The front panel which adopts flush design and complies with IP66 standard makes it the perfect fit in industrial applications.

The IPPC 2140P supports WWAN/WLAN expansion and others via dual Gigabit Ethernet connectors, two mini-PCIe slots and one SIM card holder. With support for wide power input of 12~30VDC, IPPC2140P can gain a strong foothold in industrial field and machine devices. In addition, IPPC 2140P can hook 2nd display via a VGA port for dual independent display. IPPC 2140P has two isolated RS232/422/485 ports and optional fieldbus ports.

Specifications

Panel

- LCD size: 21.5", 16:9
- Resolution: Full HD 1920x1080
- Luminance: 300cd/m2
- Contrast ratio: 5000
- LCD color: 16.7M
- Viewing angle: 89 (U), 89 (D), 89 (L), 89 (R)
- Backlight: LED

Touch

- Ten points P-Cap (Projected Capacitive Touch)
- Touch light transmission: 87%
- Anti-scratch surface: 7H hardness
- Touch interface: USB
- Windows 8 compliance

System

- CPU: onboard Intel® Celeron® Quad Core processor J1900, 2.0GHz, 2M L2 Cache (maximum frequency 2.42GHz if turbo boost enabled)
- BIOS: AMI BIOS
- System memory: 2 x 204-pin DDR3L SO-DIMM socket, 4GB DDR3L (default), support up to 4GB DDR3L-1066/1333, non-ECC and un-buffered


Storage device:

- 1 x external locked CFast socket
- 1 x hard drive bay: optional 1 x 2.5" SATA HDD or 1 x SATA DOM
- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)
- H/W status monitor: monitoring system temperature, and voltage
- Expansion: 2 x mini-PCIe sockets (support optional Wi-Fi, 3.5G module or fieldbus card)
- Panel backlight control button: Increase brightness/decrease brightness/ backlight on/off
- Front logo LED Indicator to show operating status

Rear I/O

- Ethernet: 2 x RJ45
- 2nd display VGA port: 1 x DB15
- Audio port: 1 x Line out
- USB: 2 x USB 2.0, 1 x USB 3.0
- 2-pin Remote Power on/ off switch
- Power switch
- Reset button
- COM #1: RS232/422/485 w/ 2.5kv isolated
- COM #2: RS232/422/485 w/ 2.5kv isolated
- Fieldbus: (protocol interface optional)

Dimension Drawing

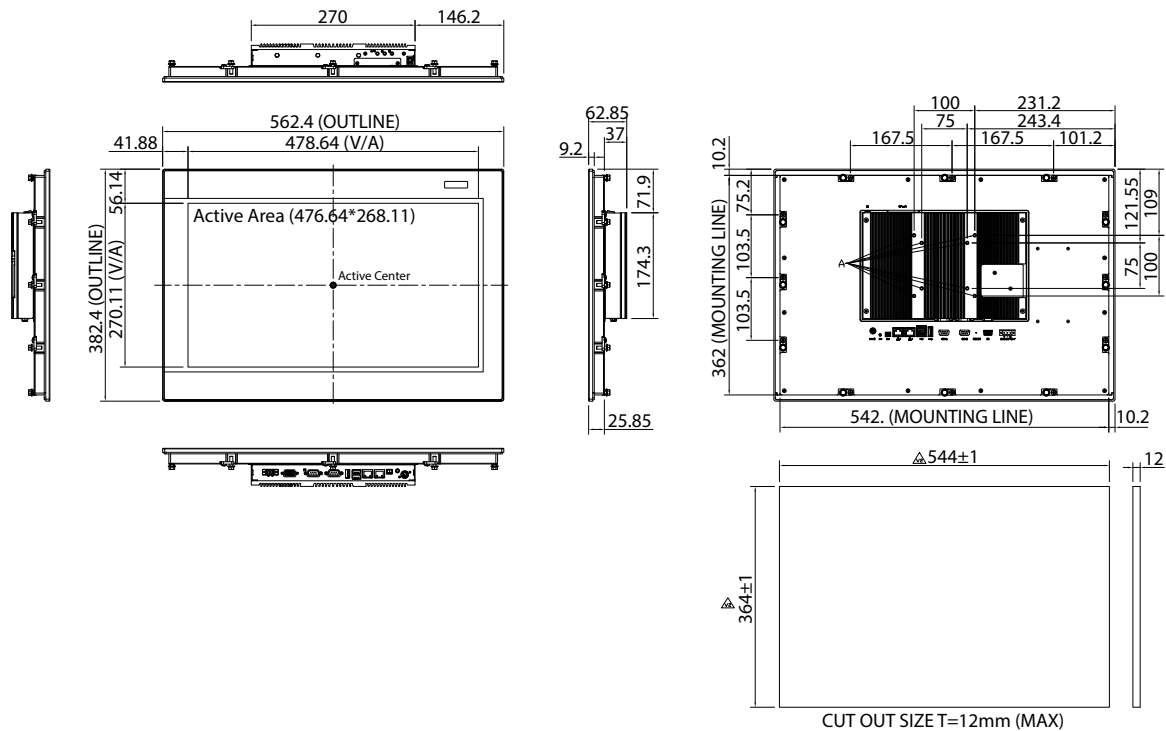

Model	Protocol	Connector
FBI90E-PNM	PROFINET Master	Dual RJ-45
FBI90E-EP	EtherNet/IP Master	
FBI90E-ECM	EtherCAT Master	DB9
FBI90E-PBM	PROFIBUS Master	
FBI90E-DNM	DeviceNet Master	5-pins PHOENIX contact terminal

Audio

- HD codec: Realtek ALC886-GR
- Audio interface: Line-out audio jack

Ethernet

- LAN chip: dual Intel® I210AT Gigabit LAN
- Ethernet interface: 10/100/1000 Based-Tx Ethernet compatible

Mechanical & Environment

- Color: Pantone 432C/RAL 70 24 front bezel
- IP protection: IP66 front
- Mounting: panel/ wall/ stand/ VESA 100mm x 100mm
- System with panel mounting kit w/o panel mounting hole
- Power input: 12~30VDC
- Power adapter: Optional AC to DC power adapter (+12V, 60W)
- Vibration:
 - IEC 68 2-64 (w/ HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
 - 2Grms @ sine, 5~500Hz, 1hr/axis (CFast operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G@wall mount, half sine, 11ms
- Operating temperature: -10°C to 60°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing
- Dimension: 562.4x382.4x62.85mm
- Weight: 9.26Kg

Certifications

- CE (including EN61000-6-2/EN61000-6-4)
- FCC Class A

OS Support Lists

- Windows 8 32bit/64bit
- Windows 7 32bit/64bit
- WinCE 7.0

Ordering Information

Barebone

- **IPPC 2140P (P/N: 10I12140P00X0)**
21.5" full HD LED backlight touch panel PC, Intel® Celeron® quad core processor J1900, up to 2.42GHz, 2M L2 Cache, touch screen, 4GB DDR3L, 2 x RS232/422/485 and brightness adjustment buttons, optional fieldbus module

Options

- **12V, 60W AC/DC power adapter w/o power cord (P/N: 7400060031X00)**
- **PROFINET Master interface module: FBI90E-PNM for APPC (P/N: 88IA1932T00X0)**
- **EtherNet/IP Master interface module: FBI90E-EP for APPC (P/N: 88IA1932T01X0)**
- **EtherCAT Master interface module: FBI90E-ECM for APPC (P/N: 88IA1932T02X0)**
- **PROFIBUS Master interface module: FBI90E-PBM for APPC (P/N: 8IA1932T03X0)**
- **DeviceNet Master interface module: FBI90E-DNM for APPC (P/N: 88IA1932T04X0)**



Main Features

- IP66 compliant and metal housing with robust aluminum front zero bezel for harsh environment
- 10 points P-Cap multi-touch with zero bezel flush front design
- 3 display input interface: analog VGA/DVI-D/DisplayPort
- Shares identical appearance with IPPC series
- Ultra slim in depth
- OSD multilanguage function
- All connectors with lock
- Mounting support: panel/wall/stand/VESA 100mm x 100mm
- Wide range power input 12~24VDC

Product Overview

15.6" 16:9 LCD display IPPD 1600P is based on a ten points P-Cap multi-touch screen with resolution up to 1366 x 768 Panel. IPPD 1600P has system grade grounding protection which means chassis grounding and power grounding design to avoid in-rush current damage monitor. IPPD 1600P is ideal for space-critical environments where systems and displays are kept apart. In addition, IPPD 1600P adopts zero bezel flush panel design and has IP66 front panel. IPPD 1600P provides prevailing video interface: VGA, DVI-D and DisplayPort, supporting both digital and analog signals. Moreover, IPPD 1600P supports 12~24VDC power input and offers panel mount and VESA mount, allowing users to choose the mounting method that meets their situation. IPPD 1600P is the best solution for NEXCOM NISE fanless computer, NVIS security surveillance series and APPC/IPPC panel PC when a second display is required.

Specifications

Panel

- LCD size: 15.6", 16:9
- Resolution: WXGA 1366 x 768
- Luminance: 300cd/m²
- Contrast ratio: 500
- LCD color: 16.7M
- Viewing angle: 80 (U), 80 (D), 85 (L), 85 (R)
- Backlight: LED

Touch

- Ten points P-Cap (projected capacitive touch)
- Touch light transmission: 87%
- Anti-scratch surface: 7H hardness
- Touch interface: USB

Rear I/O

- Touch interface port: USB with Lock
- Video port: VGA (1 x DB15)/DVI-D (1 x DVI-D connector)/DisplayPort
- DC power input connector: 3-pin PHOENIX terminal Blocks

OSD Function

- OSD keypad
- Multilanguage OSD

Mechanical & Environment

- Color: Pantone 432C/RAL 70 24 front bezel
- IP protection: IP66 front
- Mounting: panel/wall/stand/VESA 100mm x 100mm
- System with panel mounting kit w/o panel mounting hole
- Power input: 12~24VDC
- Power adapter: optional AC to DC power adapter (+12V, 60W)
- Vibration:
 - IEC 68 2-64
 - 2Grms @ sine, 5~500Hz, 1hr/axis (operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G@wall mount, half sine, 11ms
- Operating temperature: -10°C to 60°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing
- Dimension: 417.4 x 312.4 x 51.75mm
- Weight: 5.48Kg

Certifications

- CE (including EN61000-6-1/EN61000-6-2/EN61000-6-3/EN61000-6-4)
- FCC Class B



Main Features

- IP66 compliant and metal housing with robust aluminum front zero bezel for harsh environment
- 10 points P-Cap multi-touch with zero bezel flush front design
- 3 display input interface: analog VGA/DVI-D/DisplayPort
- Shares identical appearance with IPPC series
- Ultra slim in depth
- OSD multi-language function
- All connectors with lock
- Mounting support: panel/wall/stand/VESA 100mm x 100mm
- Wide range power input 12~24VDC

Product Overview

18.5" 16:9 LCD display IPPD 1800P is based on a ten points P-Cap multi-touch screen with resolution up to 1366 x 768 Panel. IPPD 1800P has system grade grounding protection which means chassis grounding and power grounding design to avoid in-rush current damage monitor. IPPD 1800P is ideal for space-critical environments where systems and displays are kept apart. In addition, IPPD 1800P adopts zero bezel flush panel design and has IP66 front panel. IPPD 1800P provides prevailing video interface: VGA, DVI-D and DisplayPort, supporting both digital and analog signals. Moreover, IPPD 1800P supports 12~24VDC power input and offers panel mount and VESA mount, allowing users to choose the mounting method that meets their situation. IPPD 1800P is the best solution for NEXCOM NISE fanless computer, NVIS security surveillance series and APPC/IPPC panel PC when a second display is required.

Specifications

Panel

- LCD size: 18.5", 16:9
- Resolution: WXGA 1366 x 768
- Luminance: 400cd/m2
- Contrast ratio: 1000
- LCD color: 16.7M
- Viewing angle: 80 (U), 80 (D), 85 (L), 85 (R)
- Backlight: LED

Touch

- Ten points P-Cap (projected capacitive touch)
- Touch light transmission: 87%
- Anti-scratch surface: 7H hardness
- Touch interface: USB
- Windows 8 compliance

Rear I/O

- Touch interface port: USB with Lock
- Video port: VGA (1 x DB15)/DVI-D (1 x DVI-D connector)/DisplayPort
- DC power input connector: 3-pin PHOENIX terminal blocks

OSD Function

- OSD keypad
- Multilanguage OSD


Mechanical & Environment

- Color: Pantone 432C/RAL 70 24 front bezel
- IP protection: IP66 front
- Mounting: panel/wall/stand/VESA 100mm x 100mm
- System with panel mounting kit w/ o panel mounting hole
- Power input: 12~24VDC
- Power adapter: optional AC to DC power adapter (+12V, 60W)
- Vibration:
 - IEC 68 2-64
 - 2Grms @ sine, 5~500Hz, 1hr/axis (operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G@wall mount, half sine, 11ms
- Operating temperature: -10°C to 60°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing
- Dimension: 490.8 x 320.6 x 50.65mm
- Weight: 6.24Kg

Certifications

- CE (including EN61000-6-1/EN61000-6-2/EN61000-6-3/EN61000-6-4)
- FCC Class B

Dimension Drawing

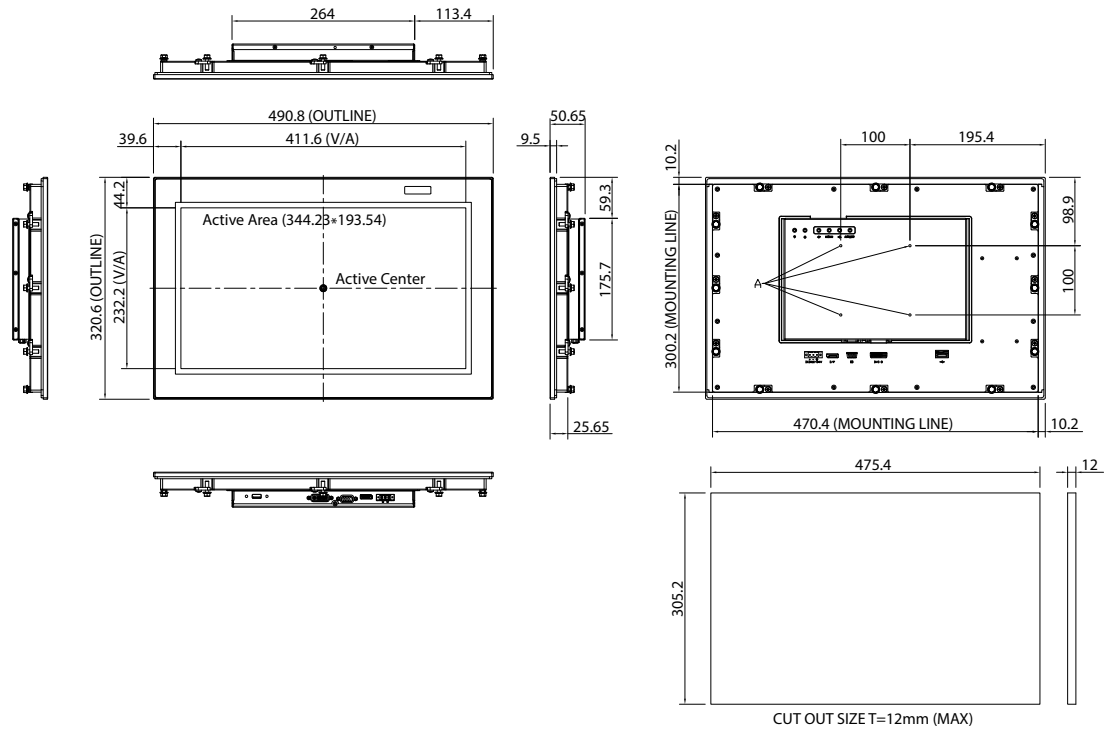

Ordering Information

Barebone

- ♦ **IPPC 1800P (P/N: 10I1800P00X0)**
18.5" WXGA heavy industrial 16:9 LED backlight P-Cap touch monitor with VGA, DVI-D and DisplayPort input, 12~24VDC input

Option

- ♦ **12V, 60W AC/DC power adapter w/o power cord**
(P/N: 7400060031X00)
- ♦ **1.8m DVI-D male to DVI-D male cable**
(P/N: 603DVI0007X00)
- ♦ **1.8m DisplayPort cable (P/N: 6030000122X00)**



Main Features

- IP66 compliant and metal housing with robust aluminum front zero bezel for harsh environment
- 10 points P-Cap multi-touch with zero bezel flush front design
- 3 display input interface: analog VGA/DVI-D/DisplayPort
- Shares identical appearance with IPPC series
- Ultra slim in depth
- OSD multi-language function
- All connectors with Lock
- Mounting support: panel/wall/stand/VESA 100mm x 100mm
- Wide range power input 12~24VDC

Product Overview

21.5" 16:9 LCD display IPPD 2100P is based on a ten points P-Cap multi-touch screen with resolution up to 1920 x 1080 (Full HD) Panel. IPPD 2100P has system grade grounding protection which means chassis grounding and power grounding design to avoid in-rush current damage monitor. IPPD 2100P is ideal for space-critical environments where systems and displays are kept apart. In addition, IPPD 2100P adopts zero bezel flush panel design and has IP66 front panel. IPPD 2100P provides prevailing video interface: VGA, DVI-D and DisplayPort, supporting both digital and analog signals. Moreover, IPPD 2100P supports 12~24VDC power input and offers panel mount and VESA mount, allowing users to choose the mounting method that meets their situation. IPPD 2100P is the best solution for NEXCOM NISE fanless computer, NVIS security surveillance series and APPC/IPPC panel PC when a second display is required.

Specifications

Panel

- LCD size: 21.5", 16:9
- Resolution: full HD 1920 x 1080
- Luminance: 300cd/m2
- Contrast ratio: 5000
- LCD color: 16.7M
- Viewing angle: 89 (U), 89 (D), 89 (L), 89 (R)
- Backlight: LED

Touch

- Ten points P-Cap (projected capacitive touch)
- Touch light transmission: 87%
- Anti-scratch surface: 7H hardness
- Touch interface: USB
- Windows 8 compliance

Rear I/O

- Touch interface port: USB with Lock
- Video port: VGA (1 x DB15)/DVI-D (1 x DVI-D connector)/DisplayPort
- DC power input connector: 3-pin PHOENIX terminal blocks

OSD Function

- OSD keypad
- Multilanguage OSD


Mechanical & Environment

- Color: Pantone 432C/RAL 70 24 front bezel
- IP protection: IP66 front
- Mounting: panel/ wall/ stand/ VESA 100mm x 100mm
- System with panel mounting kit w/o panel mounting hole
- Power input: 12~24VDC
- Power adapter: optional AC to DC power adapter (+12V, 60W)
- Vibration:
 - IEC 68 2-64
 - 2Grms @ sine, 5~500Hz, 1hr/axis (operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G@wall mount, half sine, 11ms
- Operating temperature: -10°C to 60°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing
- Dimension: 562.4 x 382.4 x 50.85mm
- Weight: 7.87Kg

Certifications

- CE (including EN61000-6-1/EN61000-6-2/EN61000-6-3/EN61000-6-4)
- FCC Class B

Dimension Drawing

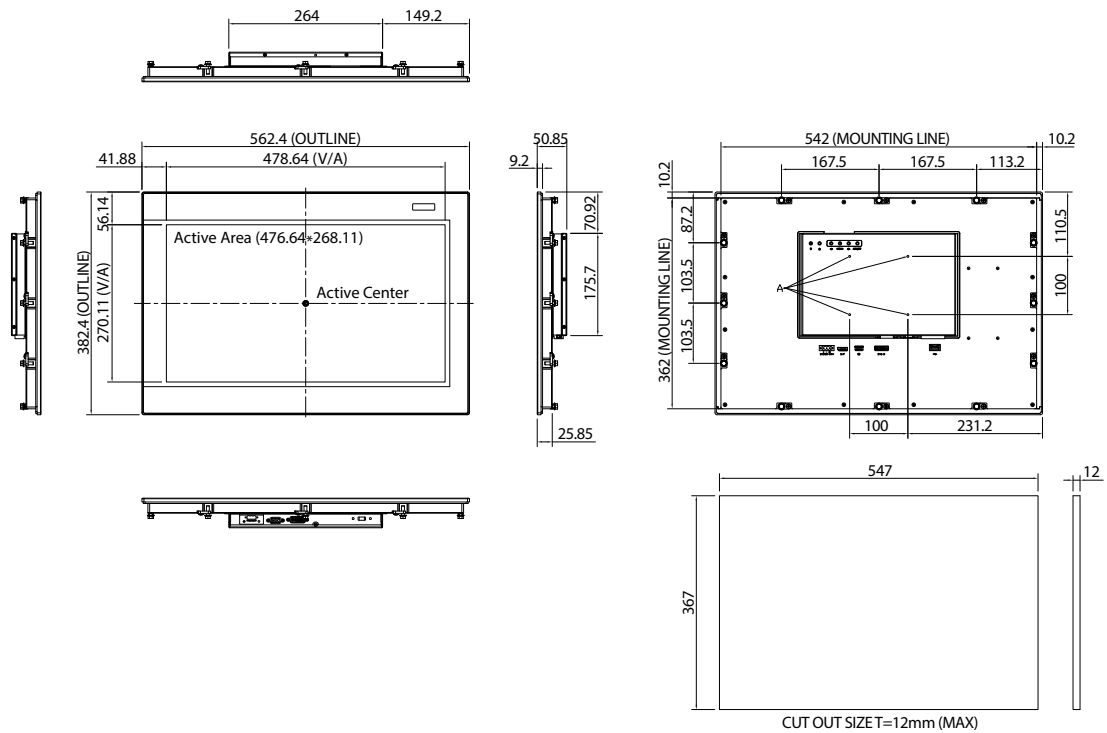

Ordering Information

Barebone

- **IPPC 2100P (P/N: 10II2100P00X0)**
21.5" full HD heavy industrial 16:9 LED backlight P-Cap touch monitor with VGA, DVI-D and DisplayPort input, 12~24VDC input

Option

- **12V, 60W AC/DC power adapter w/o power cord (P/N: 7400060031X00)**
- **1.8m DVI-D male to DVI-D male cable (P/N: 603DVI0007X00)**
- **1.8m DisplayPort cable (P/N: 6030000122X00)**

APPC 0840T

8" TFT SVGA 4:3 Flush Panel PC with Intel® Atom™ E3826, 1.46GHz,
Touch Screen, 2GB DDR3L, 4 x USB, 2 x COM and VGA



Main Features

- 4:3 8" SVGA fanless panel computer
- Intel® Atom™ E3826, Dual Core, low power consumption CPU
- Flush panel by 5-wire touch screen
- Dual GbE/2nd display-VGA/2x RS232/422/485/Line-out
- 3 x USB 2.0/1 x USB 3.0/1 x mini-PCIe socket/1 x CFast
- Remote power switch
- DDR3L 2GB/2.5" HDD bracket
- IP65 compliant front panel
- Support Fieldbus module, JMobile HMI and CODESYS SoftLogic (optional)
- Mounting support: panel/wall/stand/VESA 75mm x 75mm
- Wide range power input 12~30VDC

Product Overview

Incorporated a 8" 4:3 touch screen LCD panel with resolutions up to 800 x 600 (SVGA) and 400 nits brightness, the APPC 0840T are fanless Panel PC based on the Atom™ E3826 processor. The industrial motherboard is reengineering to have RAM and mini-PCIe aligned in the same side of the board with its Intel® Atom™ E3826 CPU. This dedicated motherboard benefits users both in future capability expansion and ease for maintenance. The Panel PC comes with flush panel design and can have IP65 front for industrial applications. The touch screen provides the durable, reliable, and scratchable benefits for easy maintenance in wide applications.

The ultra slim APPC 0840T makes it become industrial slimmest model for space-critical applications, such as, access control, small automation machineries, forklift and truck etc. This APPC 0840T supports fieldbus module, WWAN/WLAN expansion and others via dual Gigabit Ethernet connectors, one mini-PCIe slot and one SIM card holder. With support for wide power input of 12~30VDC, this APPC 0840T can gain a strong foothold in industrial field and machine devices. In addition, this APPC 0840T can hook 2nd display via a VGA port for dual independent display. 0840T has two RS232/422/485 ports, three USB 2.0 port, one USB 3.0 port and fieldbus port.

Specifications

Panel

- LCD size: 8", 4:3
- Resolution: SVGA 800 x 600
- Luminance: 400cd/m2
- Contrast ratio: 500
- LCD color: 262K
- Viewing angle: 50(U), 70(D), 70(L), 70(R)
- Backlight: LED

Touch screen

- 5-wire resistive (Flush panel type)
- Touch light transmission: 82%
- Touch interface: USB

System


- CPU: on-board Intel® Atom™ dual core processor E3826, 1.46GHz, 1M L2 cache
- BIOS: AMI BIOS
- System memory: 1x 204-pin DDR3L SO-DIMM socket, 2GB DDR3L (default), support up to 8GB DDR3L-1066/1333, non-ECC and un-buffered
- Storage device:

- 1 x external locked CFast socket
- 1 x hard drive bay: optional 1 x 2.5" SATA HDD or 1 x SATA DOM
- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)
- H/W status monitor: monitoring system temperature, and voltage
- Expansion: 1 x mini-PCIe socket1 (support optional Wi-Fi, 3.5G module or fieldbus card)

Rear I/O

- Ethernet: 2 x RJ45
- 2nd display VGA port: 1 x DB15
- Audio port: 1 x Line-out
- USB: 3 x USB 2.0; 1 x USB 3.0
- Power switch
- Remote power switch
- Reset button
- COM #1: RS232/422/485
- COM #2: RS232/422/485
- Fieldbus: (protocol interface optional)

Dimension Drawing

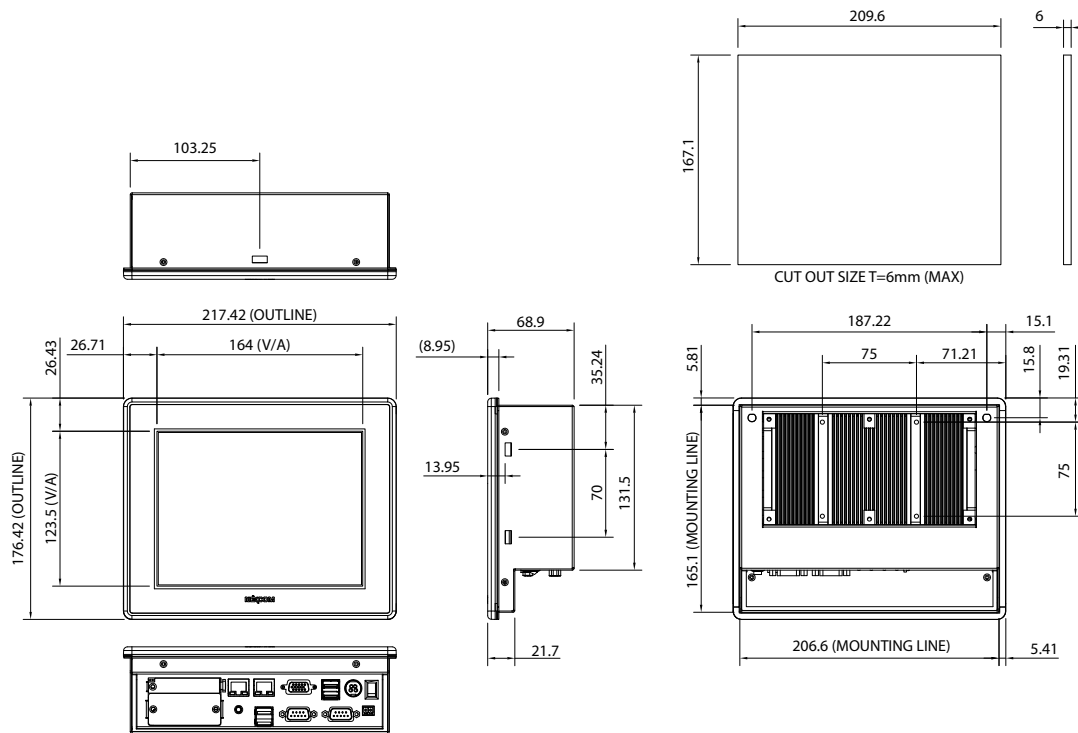

Model	Protocol	Connector
FBI90E-PNM	PROFINET Master	Dual RJ-45
FBI90E-EP	EtherNet/IP Master	
FBI90E-ECM	EtherCAT Master	
FBI90E-PBM	PROFIBUS Master	DB9
FBI90E-DNM	DeviceNet Master	5-pins Phoenix contact terminal

- Weight: 2.3Kg

Certifications

- CE approval
- FCC Class A

OS Support Lists

- Windows 8 32-bit/64-bit
- Windows 7 32-bit/64-bit
- WinCE 7.0

Audio

- HD codec: realtek ALC886-GR
- Audio interface: Line-out audio jack

Ethernet

- LAN chip: dual Intel® I210AT Gigabit LAN
- Ethernet interface: 10/100/1000 Base-Tx Ethernet compatible

Mechanical & Environment

- Color: Pantone black
- IP protection: IP65 front
- Mounting: panel/wall/stand/VESA 75mm x 75mm
- System with panel mounting kit w/o panel mounting hole
- Power input: 12~30VDC
- Power adapter: optional AC to DC power adapter (+12V, 60W)
- Vibration:
 - IEC 68 2-64 (w/HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
 - 2Grms @ sine, 5~500Hz, 1hr/axis (CFast operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G@wall mount, half sine, 11ms
- Operating temperature: -5°C to 50°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing limits to be at 90% RH at max 50°C
- Dimension: 217.4x176.4x68.9mm

Ordering Information

Barebone

- **APPC 0840T (P/N: 10IA0840T00X0)**
8" SVGA LED backlight touch panel PC with Intel® Atom™ E3826 1.46 GHz, touch screen, 2GB DDR3L with 2x RS232/422/485

Options

- **12V, 60W AC/DC power adapter w/o power cord (P/N: 7400060029X00)**
- **PROFINET, EtherNet/IP, EtherCAT, SERCOSIII master interface module: FBI 90E-REM (P/N: 10J50090E08X0)**
- **PROFINET master interface module: FBI 90E-PNM (P/N: 10J50090E21X0)**
- **PROFIBUS master interface module: FBI 90E-PBM (P/N: 10J50090E09X0)**
- **DeviceNet master interface module: FBI 90E-DNM (P/N: 10J50090E10X0)**
- **EtherCAT master interface module: FBI 90E-ECM (P/N: 10J50090E19X0)**



Main Features

- 4:3 12.1" SVGA fanless LED panel computer
- Intel® Celeron® J1900, Quad Core, low consumption CPU
- Flush panel by 5-wire touch screen
- Dual GbE/2nd display-VGA/Line-out/PS2 KB/MS
- 3 x USB/2 x mini-PCIe sockets/1 x CFast/2 x RS232/422/485
- DDR3L 4GB/2.5" HDD bracket
- IP65 compliant front panel
- Support JMobile HMI and CODESYS SoftLogic (optional)
- Mounting support: panel/wall/stand/VESA 100mm x 100mm
- Wide range power input 12V~30VDC

Product Overview

The 12.1" fanless panel PC APPC 1240T incorporating an industrial motherboard is intended for versatile industrial applications. APPC 1240T has a touch screen LED backlight LCD panel with 800 x 600 (SVGA) resolution and 450-nit brightness. The front panel which adopts flush design and complies with IP65 standard makes it the perfect fit in industrial applications.

This APPC series supports WWAN/WLAN expansion and others via dual Gigabit Ethernet connectors, two mini-PCIe slots and one SIM card holder. With support for wide power input of 12~30VDC, this APPC series can gain a strong foothold in industrial field and machine devices. In addition, this APPC series can hook 2nd display via a VGA port for dual independent display. APPC 1240T has two isolated RS232/422/485 ports.

Specifications

Panel

- LCD size: 12.1", 4:3
- Resolution: SVGA 800 x 600
- Luminance: 450cd/m²
- Contrast ratio: 700
- LCD color: 16.2M
- Viewing angle: 65 (U), 75 (D), 80 (L), 80 (R)
- Backlight: LED

Touch Screen

- 5-wire resistive (flush panel type)
- Light transmission: 80%
- Interface: USB

System

- CPU: on-board Intel® Celeron® Quad Core processor J1900 processor, up to 2.42GHz, 2M L2 cache
- BIOS: AMI BIOS
- System memory: 2 x 204-pin DDR3L SO-DIMM socket, 4GB DDR3L (default), support up to 8GB DDR3L-1066/1333, non-ECC and un-buffered
- Storage device:
 - 1 x external locked CFast socket
 - 1 x hard drive bay: optional 1 x 2.5" SATA HDD or 1 x SATA DOM

- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)
- H/W status monitor: monitoring system temperature, and voltage
- Expansion: 2 x mini-PCIe sockets (support optional Wi-Fi, 3.5G module)

Rear I/O

- Ethernet: 2 x RJ45
- 2nd display VGA port: 1 x DB15
- Audio port: 1 x Line-out
- USB: 2 x USB 2.0, 1 x USB 3.0
- PS2 keyboard/mouse
- Power switch
- Reset button
- 2-pin remote power on/off switch
- COM #1: RS232/422/485 w/ 2.5kv isolated
- COM #2: RS232/422/485 w/ 2.5kv isolated


Audio

- HD audio codec: realtek ALC886-GR
- Audio interface: Line-out

Ethernet

- LAN chip: dual Intel® I210AT Gigabit LAN
- Ethernet interface: 10/100/1000 Base-Tx Ethernet compatible

Dimension Drawing

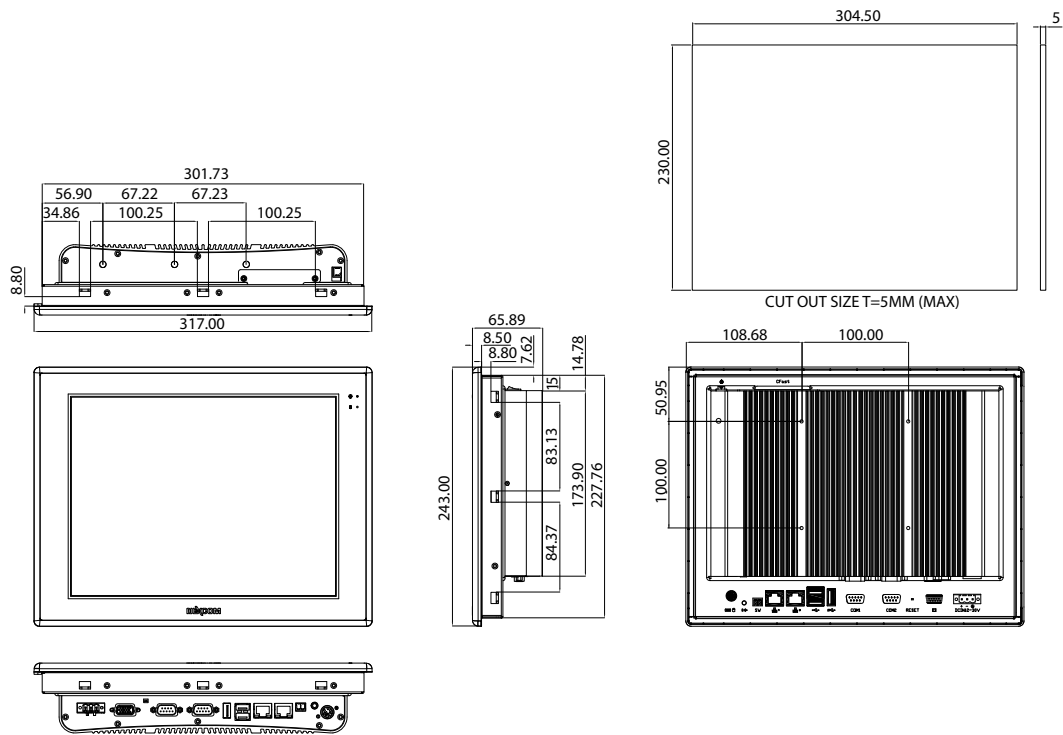

Mechanical & Environment

- Color: Pantone black\RAL 15 00 front bezel w/ Pantone 400C\RAL 090 80 10 metal style membrane
- IP protection: IP65 front
- Mounting: panel/wall/stand/VESA 100mm x 100mm
- Power input: 12V~30VDC
- Power adapter: optional AC to DC power adapter (+12V, 60W)
- Vibration:
 - IEC 68 2-64 (w/ HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
 - 2Grms @ sine, 5~500Hz, 1hr/axis (CFast operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G@wall mount, half sine, 11ms
- Operating temperature: -5°C to 60°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing
Limits to be at 90% RH at max 50°C
- Dimension: 317 x 243 x 65.89mm
- Weight: 4 Kg

Certifications

- CE approval
- FCC Class A

OS Support Lists

- Windows 8 32-bit/64-bit
- Windows 7 32-bit/64-bit
- WinCE 7.0

Ordering Information

Barebone

- **APPC 1240T-J1900-4G (P/N: 10IA1240T07X0)**
12.1" SVGA LED backlight touch panel PC, Celeron® J1900 up to 2.42GHz, touch screen, 4GB DDR3L, 2 xRS232/422/485

Options

- **12V, 60W AC/DC power adapter w/o power cord (P/N: 7400060031X00)**



Main Features

- 4:3 12.1" XGA fanless LED panel computer
- Intel® Celeron® J1900, Quad Core, low consumption CPU
- Flush panel by 5-wire touch screen
- Dual GbE/2nd display-VGA/Line-out/PS2 KB/MS
- 3 x USB/2 x mini-PCIe sockets/1 x CFast/2 x RS232/422/485
- DDR3L 4GB/2.5" HDD bracket
- IP65 compliant front panel
- Support JMobile HMI and CODESYS SoftLogic (optional)
- Mounting support: panel/wall/stand/VESA 100mm x 100mm
- Wide range power input 12V~30VDC

Product Overview

The 12.1" XGA fanless panel PC APPC 1245T incorporating an industrial motherboard is intended for versatile industrial applications. APPC 1245T supports 1024 x 768 (XGA) resolution and 500-nit brightness. The front panel which adopts flush design and complies with IP65 standard makes it the perfect fit in industrial applications.

This APPC series supports WWAN/WLAN expansion and others via dual Gigabit Ethernet connectors, two mini-PCIe slots and one SIM card holder. With support for wide power input of 12~30VDC, this APPC series can gain a strong foothold in industrial field and machine devices. In addition, this APPC series can hook 2nd display via a VGA port for dual independent display. APPC 1245T has two isolated RS232/422/485 ports.

Specifications

Panel

- LCD size: 12.1", 4:3
- Resolution: XGA 1024 x 768
- Luminance: 500cd/m²
- Contrast ratio: 700
- LCD color: 16.2M
- Viewing angle: 80 (U), 80 (D), 80 (L), 80 (R)
- Backlight: LED

Touch Screen

- 5-wire resistive (flush panel type)
- Light transmission: 80%
- Interface: USB

System

- CPU: on-board Intel® Celeron® Quad Core processor J1900 processor, up to 2.42GHz, 2M L2 cache
- BIOS: AMI BIOS
- System memory: 2 x 204-pin DDR3L SO-DIMM socket, 4GB DDR3L (default), support up to 8GB DDR3L-1066/1333, non-ECC and un-buffered
- Storage device:
 - 1 x external locked CFast socket
 - 1 x hard drive bay: optional 1 x 2.5" SATA HDD or 1 x SATA DOM
- Watchdog timer: Watchdog timeout can be programmable by

software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)

- H/W status monitor: monitoring system temperature, and voltage
- Expansion: 2 x mini-PCIe sockets (support optional Wi-Fi, 3.5G module)

Rear I/O

- Ethernet: 2 x RJ45
- 2nd display VGA port: 1 x DB15
- Audio port: 1 x Line-out
- USB: 2 x USB 2.0 + 1 x USB 3.0
- PS2 keyboard/mouse
- Power switch
- Reset button
- 2-pin remote power on/off switch
- COM #1: RS232/422/485 w/ 2.5kv isolated
- COM #2: RS232/422/485 w/ 2.5kv isolated


Audio

- HD audio codec: realtek ALC886-GR
- Audio interface: Line-out

Ethernet

- LAN chip: dual Intel® I210AT Gigabit LAN
- Ethernet interface: 10/100/1000 Base-Tx Ethernet compatible

Dimension Drawing

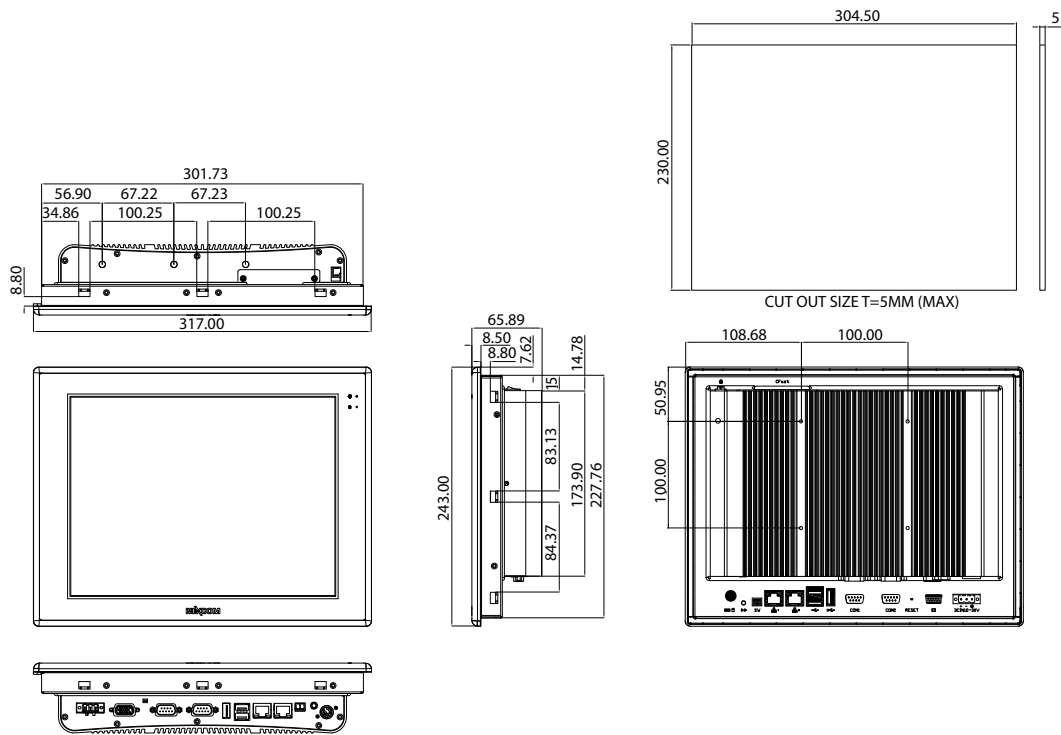

Mechanical & Environment

- Color: Pantone black\RAL 15 00 front bezel w/ Pantone 400C\RAL 090 80 10 metal style membrane
- IP protection: IP65 front
- Mounting: panel/wall/stand/VESA 100mm x 100mm
- Power input: 12V~30VDC
- Power adapter: optional AC to DC power adapter (+12V, 60W)
- Vibration:
 - IEC 68 2-64 (w/ HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
 - 2Grms @ sine, 5~500Hz, 1hr/axis (CFast operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G@wall mount, half sine, 11ms
- Operating temperature: -5°C to 60°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing limits to be at 90% RH at max 50°C
- Dimension: 317 x 243 x 65.89mm
- Weight: 4 Kg

Certifications

- CE approval
- FCC Class A

OS Support Lists

- Windows 8 32-bit/64-bit
- Windows 7 32-bit/64-bit
- WinCE 7.0

Ordering Information

Barebone

- **APPC 1245T-J1900-4G (P/N: 10IA1245T06X0)**
12.1" XGA LED backlight touch panel PC, Intel® Celeron® J1900 up to 2.42GHz, touch screen, 4GB DDR3L, 2 x RS232/422/485

Options

- **12V, 60W AC/DC power adapter w/o power cord (P/N: 7400060031X00)**

APPC 1540T

15" TFT XGA 4:3 Flush Panel PC with Intel® Celeron® J1900, up to 2.42GHz,
Touch Screen, 4GB DDR3L, 3 x USB, 2 x COM



Main Features

- 4:3 15" XGA fanless LED panel computer
- Intel® Celeron® J1900, Quad Core, low consumption CPU
- Flush panel by 5-wire touch screen
- Dual GbE/2nd display-VGA/Line-out/PS2 KB/MS
- 3 x USB/2 x mini-PCIe sockets/1 x CFast/2 x RS232/422/485
- DDR3L 4GB/2.5" HDD bracket
- IP65 compliant front panel
- Support JMobile HMI and CODESYS SoftLogic (optional)
- Mounting support: panel/wall/stand/VESA 100mm x 100mm
- Wide range power input 12V~30VDC

Product Overview

The 15" fanless panel PC APPC 1540T incorporating an industrial motherboard is intended for versatile industrial applications. The panel PC has a touch screen LED backlight LCD panel with 1024 x 768 (XGA) resolution and 400-nit brightness. The front panel which adopts flush design and complies with IP65 standard makes it the perfect fit in industrial applications.

The APPC 1540T supports WWAN/WLAN expansion and others via dual Gigabit Ethernet connectors, two mini-PCIe slots and one SIM card holder. With support for wide power input of 12~30VDC, APPC 1540T can gain a strong foothold in industrial field and machine devices. In addition, APPC 1540T can hook 2nd display via a VGA port for dual independent display. APPC 1540T has two isolated RS232/422/485 ports.

Specifications

Panel

- LCD size: 15", 4:3
- Resolution: XGA 1024 x 768
- Luminance: 450cd/m²
- Contrast ratio: 800
- LCD color: 16.2M
- Viewing angle: 70 (U), 80 (D), 80 (L), 80 (R)
- Backlight: LED

Touch Screen

- 5-wire resistive (flush panel type)
- Light transmission: 81%
- Interface: USB

System

- CPU: on-board Intel® Celeron® Quad Core processor J1900 processor, up to 2.42GHz, 2M L2 cache
- BIOS: AMI BIOS
- System memory: 2 x 204-pin DDR3L SO-DIMM socket, 4GB DDR3L (default), support up to 8GB DDR3L-1066/1333, non-ECC and un-buffered
- Storage device:
 - 1 x external locked CFast socket
 - 1 x hard drive bay: optional 1 x 2.5" SATA HDD or 1 x SATA DOM
- Watchdog timer: Watchdog timeout can be programmable by

software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)

- H/W status monitor: monitoring system temperature, and voltage
- Expansion: 2 x mini-PCIe sockets (support optional Wi-Fi, 3.5G module)

Rear I/O

- Ethernet: 2 x RJ45
- 2nd display VGA port: 1 x DB15
- Audio port: 1 x Line-out
- USB: 2 x USB 2.0, 1 x USB 3.0
- PS2 keyboard/mouse
- Power switch
- Reset button
- 2-pin remote power on/off switch
- COM #1: RS232/422/485 w/ 2.5kv isolated
- COM #2: RS232/422/485 w/ 2.5kv isolated


Audio

- HD audio codec: realtek ALC886-GR
- Audio interface: Line-out

Ethernet

- LAN chip: dual Intel® I210AT Gigabit LAN
- Ethernet interface: 10/100/1000 Base-Tx Ethernet compatible

Dimension Drawing

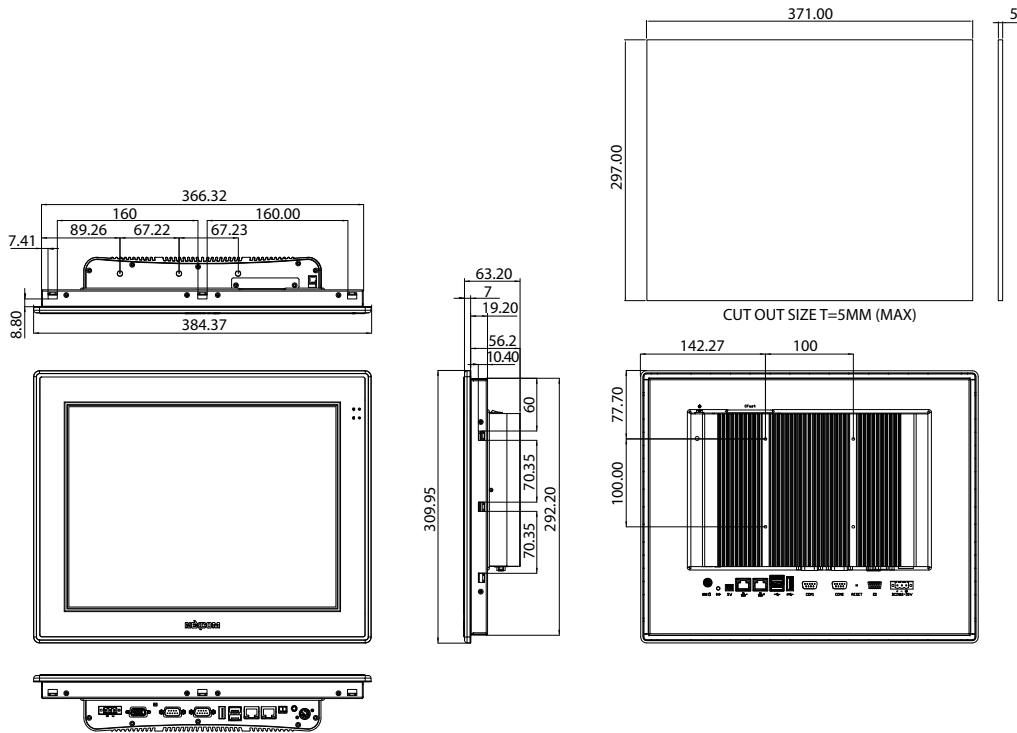

Mechanical & Environment

- Color: Pantone black\RAL 15 00 front bezel w/ Pantone 400C\RAL 090 80 10 metal style membrane
- IP protection: IP65 front
- Mounting: panel/wall/stand/VESA 100mm x 100mm
- Power input: 12V~30VDC
- Power adapter: optional AC to DC power adapter (+12V, 60W)
- Vibration:
 - IEC 68 2-64 (w/ HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
 - 2Grms @ sine, 5~500Hz, 1hr/axis (CFast operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G@wall mount, half sine, 11ms
- Operating temperature: -5°C to 60°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing limits to be at 90% RH at max 50°C
- Dimension: 384.37 x 309.95 x 63.2 mm
- Weight: 5.1 Kg

Certifications

- CE approval
- FCC Class A

OS Support Lists

- Windows 8 32-bit/64-bit
- Windows 7 32-bit/64-bit
- WinCE 7.0

Ordering Information

Barebone

- **APPC 1540T-J1900-4G (P/N: 10IA1540T12X0)**
15" XGA LED backlight touch panel PC, Intel® Celeron® J1900 up to 2.42GHz, touch screen, 4GB DDR3L, 2 x RS232/422/485

Options

- **12V, 60W AC/DC power adapter w/o power cord (P/N: 7400060031X00)**



Main Features

- 4:3 17" SXGA fanless panel computer
- Intel® Celeron® J1900, Quad Core, low consumption CPU
- Flush panel by 5-wire touch screen
- Dual GbE/2nd display-VGA/Line-out/PS2 KB/MS
- 3 x USB/2 x mini-PCIe sockets/1 x CFast/2 x RS232/422/485
- DDR3L 4GB/2.5" HDD bracket
- IP65 compliant front panel
- Support JMobile HMI and CODESYS SoftLogic (optional)
- Mounting support: panel/wall/stand/VESA 100mm x 100mm
- Wide range power input 12V~30VDC

Product Overview

The 17" fanless panel PC APPC 1740T incorporating an industrial motherboard is intended for versatile industrial applications. The panel PC has a touch screen LCD panel with 1280 x 1024 (SXGA) resolution and 350-nit brightness. The front panel which adopts flush design and complies with IP65 standard makes it the perfect fit in industrial applications.

The APPC 1740T supports WWAN/WLAN expansion and others via dual Gigabit Ethernet connectors, two mini-PCIe slots and one SIM card holder. With support for wide power input of 12~30VDC, APPC 1740T can gain a strong foothold in industrial field and machine devices. In addition, APPC 1740T can hook 2nd display via a VGA port for dual independent display. APPC 1740T has two isolated RS232/422/485 ports.

Specifications

Panel

- LCD size: 17", 4:3
- Resolution: SXGA 1280 x 1024
- Luminance: 350cd/m²
- Contrast ratio: 1000
- LCD color: 16.7M
- Viewing angle: 80 (U), 80 (D), 85 (L), 85 (R)
- Backlight: LED

Touch Screen

- 5-wire resistive (flush panel type)
- Light transmission: 81%
- Interface: USB

System

- CPU: on-board Intel® Celeron® Quad Core processor J1900, up to 2.42GHz, 2M L2 Cache
- BIOS: AMI BIOS
- System memory: 2 x 204-pin DDR3L SO-DIMM socket, 4GB DDR3L (default), support up to 8GB DDR3L-1066/1333, non-ECC and un-buffered
- Storage device:
 - 1 x external locked CFast socket
 - 1 x hard drive bay: optional 1 x 2.5" SATA HDD or 1 x SATA DOM
- Watchdog timer: Watchdog timeout can be programmable by

software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)

- H/W status monitor: monitoring system temperature, and voltage
- Expansion: 2 x mini-PCIe sockets (support optional Wi-Fi, 3.5G module)

Rear I/O

- Ethernet: 2 x RJ45
- 2nd display VGA port: 1 x DB15
- Audio port: 1 x Line-out
- USB: 2 x USB 2.0, 1 x USB 3.0
- PS2 keyboard/mouse
- Power switch
- Reset button
- 2-pin remote power on/off switch
- COM #1: RS232/422/485 w/ 2.5kv isolated
- COM #2: RS232/422/485 w/ 2.5kv isolated


Audio

- HD audio codec: realtek ALC886-GR
- Audio interface: Line-out

Ethernet

- LAN chip: dual Intel® I210AT Gigabit LAN
- Ethernet interface: 10/100/1000 Base-Tx Ethernet compatible

Dimension Drawing

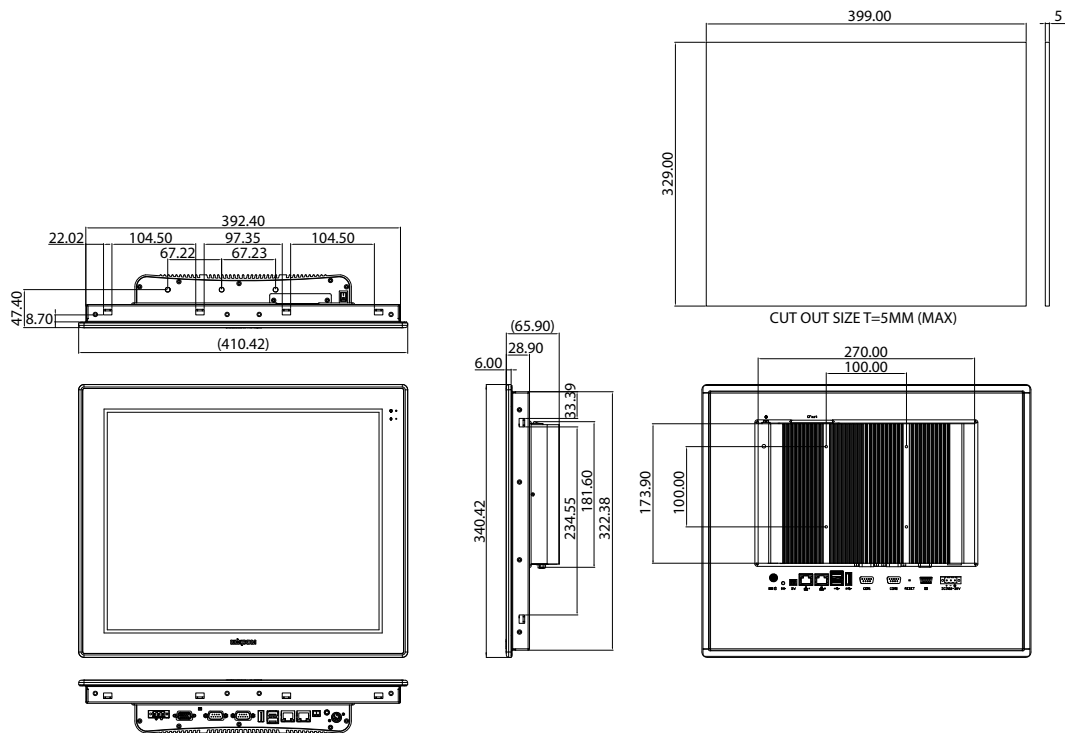

Mechanical & Environment

- Color: Pantone black\RAL 15 00 front bezel w/ Pantone 400C\RAL 090 80 10 metal style membrane
- IP protection: IP65 front
- Mounting: panel/wall/stand/VESA 100mm x 100mm
- Power input: 12V~30VDC
- Power adapter: optional AC to DC power adapter (+12V, 60W)
- Vibration:
 - IEC 68 2-64 (w/ HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
 - 2Grms @ sine, 5~500Hz, 1hr/axis (CFast operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G@wall mount, half sine, 11ms
- Operating temperature: -5°C to 60°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing limits to be at 90% RH at max 50°C
- Dimension: 410.4 x 340.4 x 65.9mm
- Weight: 6.7 Kg

Certifications

- CE approval
- FCC Class A

OS Support Lists

- Windows 8 32-bit/64-bit
- Windows 7 32-bit/64-bit
- WinCE 7.0

Ordering Information

Barebone

- **APPC 1740T-J1900-4G (P/N: 10IA1740T05X0)**
17" SXGA LED backlight touch panel PC, Intel® Celeron® J1900 up to 2.42GHz, touch screen, 4GB DDR3L, 2 x RS232/422/485

Options

- **12V, 60W AC/DC power adapter w/o power cord (P/N: 7400060031X00)**

APPC 1940T

19" TFT SXGA 4:3 Flush Panel PC with Intel® Celeron® J1900, up to 2.42GHz,
Touch Screen, 4GB DDR3L, 3 x USB, 2 x COM



Main Features

- 4:3 19" SXGA fanless LED panel computer
- Intel® Celeron® J1900, Quad Core, low consumption CPU
- Flush panel by 5-wire touch screen
- Dual GbE/2nd display-VGA/Line-out/PS2 KB/MS
- 3 x USB/2 x mini-PCIe sockets/1 x CFast/2 x RS232/422/485
- DDR3L 4GB/2.5" HDD bracket
- IP65 compliant front panel
- Support JMobile HMI and CODESYS SoftLogic (optional)
- Mounting support: panel/wall/stand/VESA 100mm x 100mm
- Wide range power input 12V~30VDC

Product Overview

The 19" fanless panel PC APPC 1940T incorporating an industrial motherboard is intended for versatile industrial applications. The panel PC has a touch screen LED backlight LCD panel with 1280 x 1024 (SXGA) resolution. The front panel which adopts flush design and complies with IP65 standard makes it the perfect fit in industrial applications.

The APPC 1940T supports WWAN/WLAN expansion and others via dual Gigabit Ethernet connectors, two mini-PCIe slots and one SIM card holder. With support for wide power input of 12~30VDC, APPC 1940T can gain a strong foothold in industrial field and machine devices. In addition, APPC 1940T can hook 2nd display via a VGA port for dual independent display. APPC 1940T has two isolated RS232/422/485 ports.

Specifications

Panel

- LCD size: 19", 4:3
- Resolution: SXGA 1280 x 1024
- Luminance: 350cd/m²
- Contrast ratio: 1000
- LCD color: 16.7M
- Viewing angle: 80 (U), 80 (D), 85 (L), 85 (R)
- Backlight: LED

Touch Screen

- 5-wire resistive (flush panel type)
- Light transmission: 81%
- Interface: USB

System

- CPU: on-board Intel® Celeron® Quad Core processor J1900 processor, up to 2.42GHz, 2M L2 cache
- BIOS: AMI BIOS
- System memory: 2 x 204-pin DDR3L SO-DIMM socket, 4GB DDR3L (default), support up to 8GB DDR3L-1066/1333, non-ECC and un-buffered
- Storage device:
 - 1 x external locked CFast socket
 - 1 x hard drive bay: optional 1 x 2.5" SATA HDD or 1 x SATA DOM
- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255

- minutes (tolerance 15% under room temperature 25°C)
- H/W status monitor: monitoring system temperature, and voltage
- Expansion: 2 x mini-PCIe sockets (support optional Wi-Fi, 3.5G module)

Rear I/O

- Ethernet: 2 x RJ45
- 2nd display VGA port: 1 x DB15
- Audio port: 1 x Line-out
- USB: 2 x USB 2.0, 1 x USB 3.0
- PS2 keyboard/mouse
- Power switch
- Reset button
- 2-pin remote power on/off switch
- COM #1: RS232/422/485 w/ 2.5kv isolated
- COM #2: RS232/422/485 w/ 2.5kv isolated


Audio

- HD audio codec: realtek ALC886-GR
- Audio interface: Line-out

Ethernet

- LAN chip: dual Intel® I210AT Gigabit LAN
- Ethernet interface: 10/100/1000 Base-Tx Ethernet compatible

Dimension Drawing

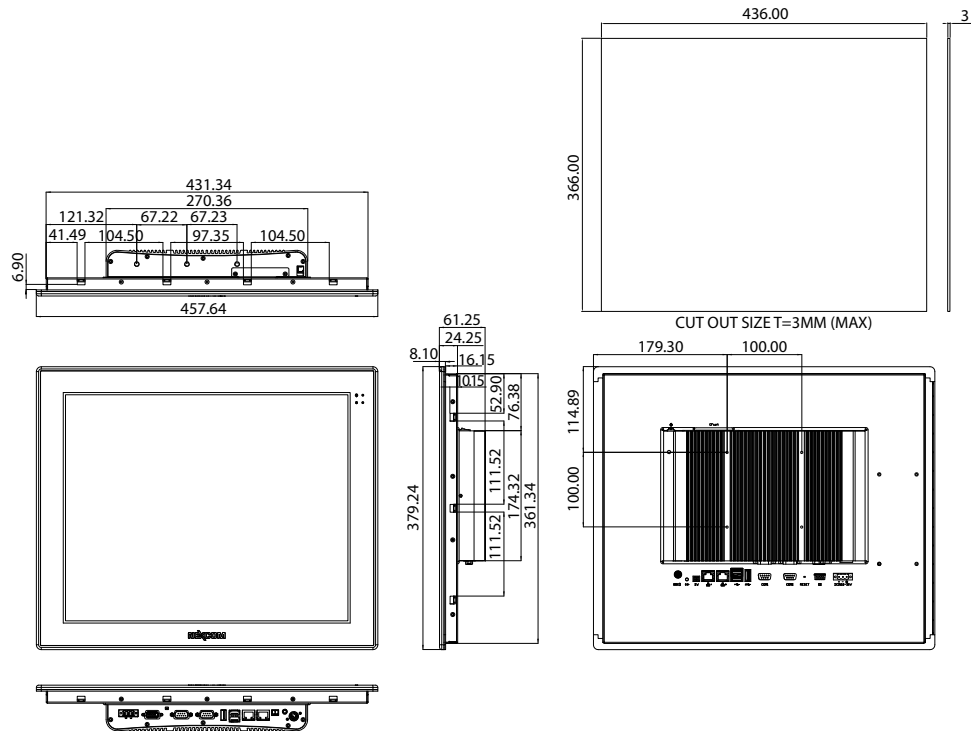

Mechanical & Environment

- Color: Pantone black\RAL 15 00 front bezel w/ Pantone 400C\RAL 090 80 10 metal style membrane
- IP protection: IP65 front
- Mounting: panel/wall/stand/VESA 100mm x 100mm
- Power input: 12V~30VDC
- Power adapter: optional AC to DC power adapter (+12V, 60W)
- Vibration:
 - IEC 68 2-64 (w/HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
 - 2Grms @ sine, 5~500Hz, 1hr/axis (CFast operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G@wall mount, half sine, 11ms
- Operating temperature: -5°C to 50°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing
Limits to be at 90% RH at max 50°C
- Dimension: 457.64 x 379.24 x 61.25 mm
- Weight: 6.7 Kg

Certifications

- CE approval
- FCC Class A

OS Support Lists

- Windows 8 32-bit/64-bit
- Windows 7 32-bit/64-bit
- WinCE 7.0

Ordering Information

Barebone

- **APPC 1940T-J1900-4G (P/N: 10IA1940T05X0)**
19" SXGA LED backlight touch panel PC, Intel® Celeron® J1900 up to 2.42GHz, touch screen, 4GB DDR3L, 2 x RS232/422/485

Options

- **12V, 60W AC/DC power adapter w/o power cord (P/N: 7400060031X00)**



Main Features

- 10.1" TFT color display, LED backlight
- 1024 x 600 pixel (WSVGA) resolution, 16.7M colors
- Resistive touchscreen
- 2 x Giga LAN and 2 x USB 3.0
- 1 x RS232/422/485 communication port
- Extremely cost efficient HMI with plastic chassis
- Slim design, mounting depth less than 30mm
- System frame ground protection (GPE) design

Product Overview

The eLITE610 is Intel Atom x5-E3930 high performance HMI with the JMobile software offers full vector graphic capabilities and plenty of connectivity options. The eLITE610 features a bright 10.1" TFT widescreen (16:9) display with 2 Giga LAN and 2 USB 3.0.


Highlight

- JMobile runtime included. Full compatibility with JMobile Studio
- Full vector graphic support. Native support of SVG graphic objects. Transparency and alpha blending
- Multilanguage applications. Easily create and manage your applications in multiple languages to meet global requirements. Far east languages are supported. Tools available in JMobile studio support easy third-party translations and help reducing development and maintenance costs of the application
- Data display in numerical, text, bargraph, analog gauges and graphic image formats
- Rich set of state-of-the-art HMI features: data acquisition, alarm handling, scheduler and timed actions (daily and weekly schedulers, exception dates), recipes, users and passwords, e-mail and RSS feeds, rotating menus
- Includes support for a wide range of communication drivers for factory and building automation systems
- Multiple drivers communication capability
- Remote monitoring and control. Client- server functionality. Mobile clients supported
- Remote maintenance and support with VNC-based functionality
- Off-line simulation of the HMI application with JMobile studio
- Powerful scripting language for automating HMI applications. Script debugging improves efficiency in application development
- Rich gallery of symbols and objects
- Project templates
- Optional plug-in modules for fieldbus systems, I/O and controllers
- Display backlight dimmable to 0%

Specifications

Technical Data	eLITE610	Technical Data	eLITE610
Panel	<ul style="list-style-type: none"> - 10.1", 16:9, WSVGA, 1024 x 600 - Luminance: 240 cd/m² typ. - LCD color: 16.7M - Active display area: 10.1" diagonal - Backlight: LED 	Ratings	<ul style="list-style-type: none"> - Power supply voltage: 24 Vdc (19.2 to 28.8 Vdc) - Current consumption: 1.64A at 24Vdc (max.) - Weight: Approx. 1.37Kg

Dimension Drawing

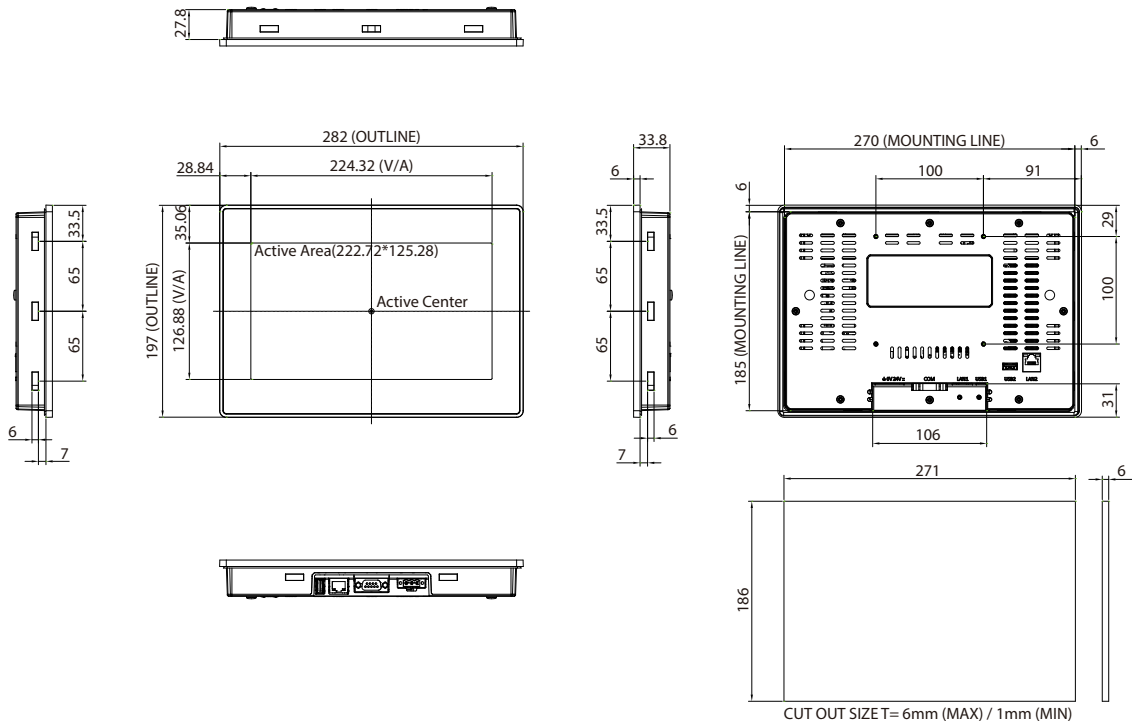

Technical Data	eLITE610	Technical Data	eLITE610
Operator Interface	- Touch: resistive	Environmental Conditions	- Operating temperature: -5°C to 50°C - Storage temperature: -20°C to 70°C - Operating and storage humidity: 5%~85% relative humidity, noncondensing - Panel/VESA mounting - Protection class: IP66 (front), IP20 (rear)
System Resources	- CPU: Intel® Atom™ x5-E3930 processor - Operating System: Windows 10 Enterprise (64-bit) - RAM: 4GB DDR3L - Flash: 32 GB - Real time clock: Yes - Buzzer: Yes		Dimensions
Interface	- Ethernet: 2x 10/100/1000Mbit - USB: 2 x USB3.0 - Serial: 1 x RS232/422/485 BIOS configuration	Certifications	- CE (Emission EN61000-6-4; Immunity EN61000-6-2 for installation in industrial environments) - FCC

Ordering Information

Barebone

- ♦ **eLITE610 (P/N: 10IE0061000X0)**
10.1" widescreen WSVGA with Intel® Atom™ x5-E3930, Ethernet and USB 3.0 interfaces, JMobile run-time
- ♦ **eLITE610-NH (P/N: 10IE0061001X0)**
10.1" widescreen WSVGA with Intel® Atom™ x5-E3930, Ethernet and USB 3.0 interfaces



Main Features

- 4.3" TFT color display, LED backlight
- 480 x 272 pixel (WQVGA) resolution, 64K colors
- Resistive touchscreen
- 1 x Ethernet port
- 1 x USB host port
- 1 x RS232/422/485 communication port
- Extremely cost efficient HMI with plastic chassis
- Slim design. Mounting depth less than 30mm

Product Overview

The eSMART Series HMI products combine state-of-the-art features and top performance with an outstanding design. They are the ideal choice for adding affordable functionality and control to your system. The eSMART04N features a bright 4.3" TFT widescreen (16:9) display with a fully dimmable LED backlight. The JMobile software offers full vector graphic capabilities and plenty of connectivity options.


Highlight

- JMobile runtime included. Full compatibility with JMobile Studio
- Full vector graphic support. Native support of SVG graphic objects. Transparency and alpha blending
- Multilanguage applications. Easily create and manage your applications in multiple languages to meet global requirements. Far East languages are supported. Tools available in JMobile studio support easy third-party translations and help reducing development and maintenance costs of the application
- Data display in numerical, text, bargraph, analog gauges and graphic image formats
- Rich set of state-of-the-art HMI features: data acquisition, alarm handling, scheduler and timed actions (daily and weekly schedulers, exception dates), recipes, users and passwords, e-mail and RSS feeds, rotating menus
- Includes support for a wide range of communication drivers for factory and building automation systems
- Multiple drivers communication capability
- Remote monitoring and control. Client- server functionality. Mobile clients supported
- Remote maintenance and support with VNC-based functionality
- Off-line simulation of the HMI application with JMobile studio
- Powerful scripting language for automating HMI applications. Script debugging improves efficiency in application development
- Rich gallery of symbols and objects
- Project templates
- Optional plug-in modules for fieldbus systems, I/O and controllers
- Display backlight dimmable to 0%

Specifications

Technical Data	eSMART04N	Technical Data	eSMART04N
Panel	<ul style="list-style-type: none"> - 4.3", 16:9, WQVGA, 480 x 272 - Luminance: 200 cd/m² typ. - LCD color: 64K - Active display area: 4.3" diagonal - Backlight: LED 	Ratings	<ul style="list-style-type: none"> - Power supply voltage: 24Vdc (18 to 32 Vdc) - Current consumption: 0.3A at 24Vdc (max.) - Fuse: Automatic - Weight: Approx. 0.6Kg
Operator Interface	<ul style="list-style-type: none"> - Touch: Resistive 		

Dimension Drawing

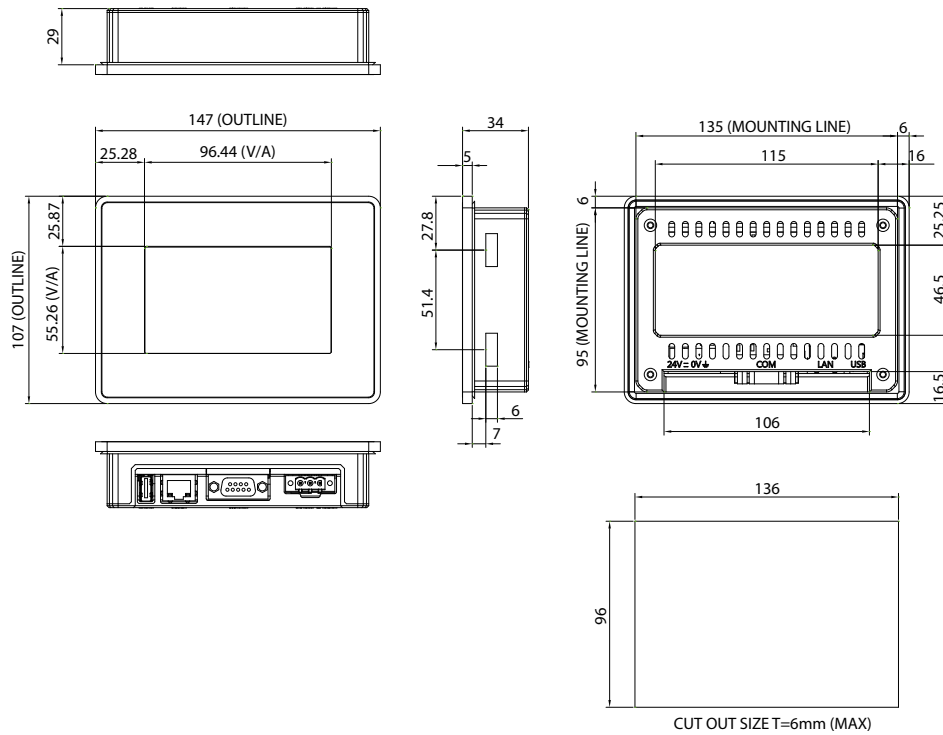

Technical Data	eSMART04N	Technical Data	eSMART04N
System Resources	<ul style="list-style-type: none"> - CPU: ARM Cortex A8 300 MHz - Operating system: Linux 3.12 - RAM: 256MB DDR - Flash: 2 GB - Application memory: 60MB - Real-time clock: Yes - RTC backup: Supercapacitor - Buzzer: Yes 	Environmental Conditions	<ul style="list-style-type: none"> - Operating temperature: 0°C to 50°C (vertical installation) - Storage temperature: -20°C to 70°C - Operating and storage humidity: 5%~85%, relative humidity, non-condensing - Protection class: IP66 (front), IP20 (rear)
		Dimensions	<ul style="list-style-type: none"> - Faceplate LxH: 147 x 107mm - Cutout AxB: 136 x 96mm - Depth D+T: 29 + 5mm
Interface	<ul style="list-style-type: none"> - Ethernet: 1 x 10/100Mbit - USB: 1 x host V2.0, max. 500 mA - Serial: 1 x RS232/422/485 software configuration 	Certifications	<ul style="list-style-type: none"> - CE (Emission EN61000-6-4; Immunity EN61000-6-2 for installation in industrial environments) - CE (Emission EN61000-6-3; Immunity EN61000-6-1 for installation in residential environments) - cULus (UL508 Listed)

Ordering Information

- **eSMART04N (P/N: 10IE0000408X0) +ESMA04AN301**
4.3" widescreen TFT WQVGA touchscreen with Ethernet and USB interfaces. JMobile run-time

* Note: This product is only for Taiwan, China, Thailand, Vietnam, Philippines, Korea, UAE and Saudi Arabia.



Main Features

- 7" TFT color display, LED backlight
- 800 x 480 pixel (WVGA) resolution, 64K colors
- Resistive touchscreen
- 1 x Ethernet port
- 1 x USB host port
- 1 x RS232/422/485 communication port
- Extremely cost efficient HMI with plastic chassis
- Slim design. Mounting depth less than 30mm

Product Overview

The eSMART Series HMI products combine state-of-the-art features and top performance with an outstanding design. They are the ideal choice for adding affordable functionality and control to your system. The eSMART07N features a bright 7" TFT widescreen (16:9) display with a fully dimmable LED backlight. The JMobile software offers full vector graphic capabilities and plenty of connectivity options.


Highlight

- JMobile runtime included. Full compatibility with JMobile Studio
- Full vector graphic support. Native support of SVG graphic objects. Transparency and alpha blending
- Multilanguage applications. Easily create and manage your applications in multiple languages to meet global requirements. Far east languages are supported. Tools available in JMobile studio support easy third-party translations and help reducing development and maintenance costs of the application
- Data display in numerical, text, bargraph, analog gauges and graphic image formats
- Rich set of state-of-the-art HMI features: data acquisition, alarm handling, scheduler and timed actions (daily and weekly schedulers, exception dates), recipes, users and passwords, e-mail and RSS feeds, rotating menus
- Includes support for a wide range of communication drivers for factory and building automation systems
- Multiple drivers communication capability
- Remote monitoring and control. Client- server functionality. Mobile clients supported
- Remote maintenance and support with VNC-based functionality
- Off-line simulation of the HMI application with JMobile studio
- Powerful scripting language for automating HMI applications. Script debugging improves efficiency in application development.
- Rich gallery of symbols and objects
- Project templates
- Optional plug-in modules for fieldbus systems, I/O and controllers
- Display backlight dimmable to 0%

Specifications

Technical Data	eSMART07N	Technical Data	eSMART07N
Panel	<ul style="list-style-type: none"> - 7", 16:9, WVGA, 800 x 480 - Luminance: 200 cd/m² typ. - LCD color: 64K - Active display area: 7" diagonal - Backlight: LED 	Ratings	<ul style="list-style-type: none"> - Power supply voltage: 24Vdc (18 to 32 Vdc) - Current consumption: 0.25A at 24Vdc (max.) - Fuse: Automatic - Weight: Approx. 0.4Kg
Operator Interface	<ul style="list-style-type: none"> - Touch: Resistive 		

Dimension Drawing

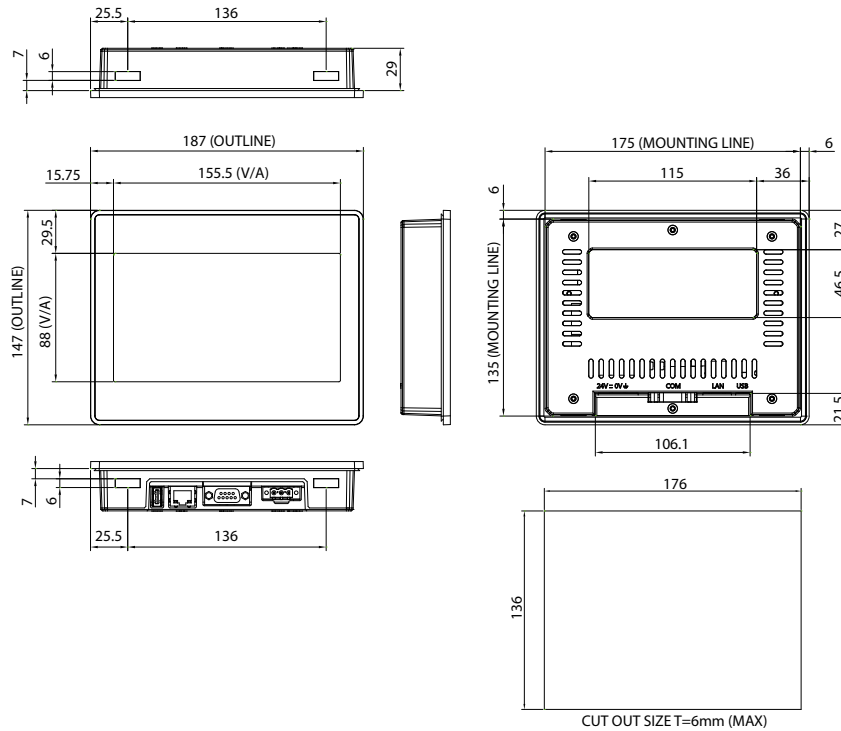

Technical Data	eSMART07N	Technical Data	eSMART07N
System Resources	<ul style="list-style-type: none"> - CPU: ARM Cortex A8 300 MHz - Operating system: Linux 3.12 - RAM: 256MB DDR - Flash: 2 GB - Application memory: 60MB - Real-time clock: Yes - RTC backup: Supercapacitor - Buzzer: Yes 	Environmental Conditions	<ul style="list-style-type: none"> - Operating temperature: 0°C to 50°C (vertical installation) - Storage temperature: -20°C to 70°C - Operating and storage humidity: 5%~85%, relative humidity, non-condensing - Protection class: IP66 (front), IP20 (rear)
		Dimensions	<ul style="list-style-type: none"> - Faceplate LxH: 187 x 147 mm - Cutout AxB: 176 x 136 mm - Depth D+T: 29 + 5 mm
Interface	<ul style="list-style-type: none"> - Ethernet: 1 x 10/100Mbit - USB: 1 x host V2.0, max. 500 mA - Serial: 1 x RS232/422/485 software configuration 	Certifications	<ul style="list-style-type: none"> - CE (Emission EN61000-6-4; Immunity EN61000-6-2 for installation in industrial environments) - CE (Emission EN61000-6-3; Immunity EN61000-6-1 for installation in residential environments) - cULus (UL508 Listed)

Ordering Information

• eSMART07N (P/N: 10IE0000708X0) +ESMA07AN301

7" widescreen TFT WVGA touchscreen with Ethernet and USB interfaces. JMobile run-time

* Note: This product is only for Taiwan, China, Thailand, Vietnam, Philippines, Korea, UAE and Saudi Arabia.



Main Features

- 10.1" TFT color display, LED backlight
- 1024 x 600 pixel (WSVGA) resolution, 64K colors
- Resistive touchscreen
- 1 x Ethernet port
- 1 x USB host port
- 1 x RS232/422/485 communication port
- Extremely cost efficient HMI with plastic chassis
- Slim design. Mounting depth less than 30mm

Product Overview

The eSMART Series HMI products combine state-of-the-art features and top performance with an outstanding design. They are the ideal choice for adding affordable functionality and control to your system. The eSMART10N features a bright 10.1" TFT widescreen (16:9) display with a fully dimmable LED backlight. The JMobile software offers full vector graphic capabilities and plenty of connectivity options.


Highlight

- JMobile runtime included. Full compatibility with JMobile Studio
- Full vector graphic support. Native support of SVG graphic objects. Transparency and alpha blending
- Multilanguage applications. Easily create and manage your applications in multiple languages to meet global requirements. Far east languages are supported. Tools available in JMobile studio support easy third-party translations and help reducing development and maintenance costs of the application
- Data display in numerical, text, bargraph, analog gauges and graphic image formats
- Rich set of state-of-the-art HMI features: data acquisition, alarm handling, scheduler and timed actions (daily and weekly schedulers, exception dates), recipes, users and passwords, e-mail and RSS feeds, rotating menus
- Includes support for a wide range of communication drivers for factory and building automation systems
- Multiple drivers communication capability
- Remote monitoring and control. Client- server functionality. Mobile clients supported
- Remote maintenance and support with VNC-based functionality
- Off-line simulation of the HMI application with JMobile studio
- Powerful scripting language for automating HMI applications. Script debugging improves efficiency in application development
- Rich gallery of symbols and objects
- Project templates
- Optional plug-in modules for fieldbus systems, I/O and controllers
- Display backlight dimmable to 0%

Specifications

Technical Data	eSMART10N	Technical Data	eSMART10N
Panel	<ul style="list-style-type: none"> - 10.1", 16:9, WSVGA, 1024 x 600 - Luminance: 200 cd/m² typ. - LCD color: 64K - Active display area: 10.1" diagonal - Backlight: LED 	Ratings	<ul style="list-style-type: none"> - Power supply voltage: 24Vdc (18 to 32 Vdc) - Current consumption: 0.38A at 24Vdc (max.) - Fuse: Automatic - Weight: Approx. 1.0Kg
Operator Interface	<ul style="list-style-type: none"> - Touch: Resistive 		

Dimension Drawing

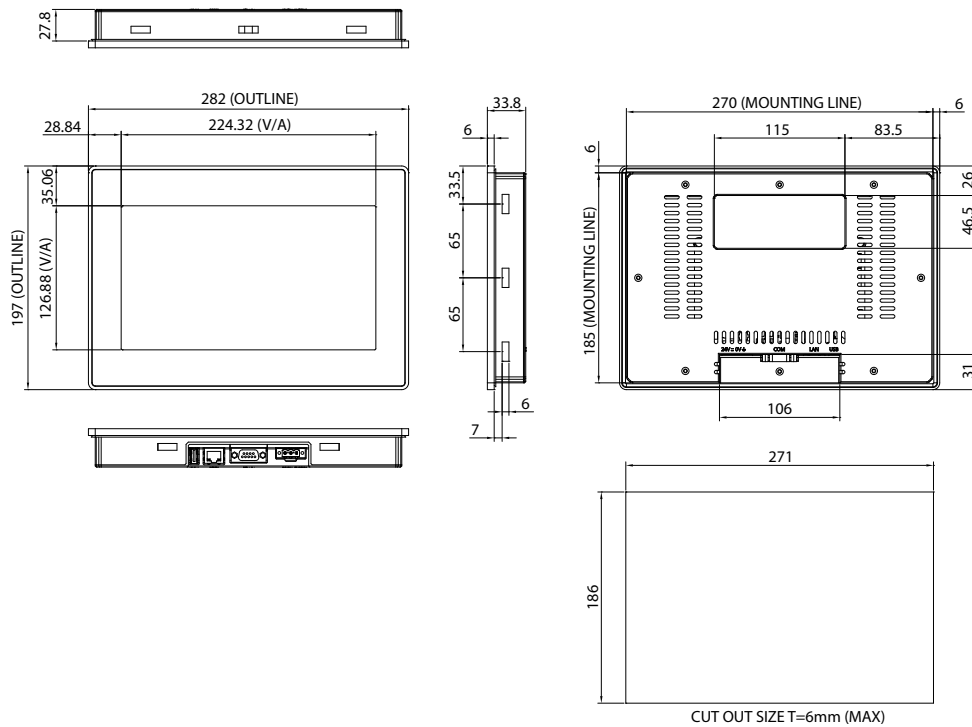

Technical Data	eSMART10N	Technical Data	eSMART10N
System Resources	<ul style="list-style-type: none"> - CPU: ARM Cortex A8 1 GHz - Operating system: Linux 3.12 - RAM: 512MB DDR - Flash: 4 GB - Application memory: 60MB - Real-time clock: Yes - RTC backup: Supercapacitor - Buzzer: Yes 	Environmental Conditions	<ul style="list-style-type: none"> - Operating temperature: 0°C to 50°C (vertical installation) - Storage temperature: -20°C to 70°C - Operating and storage humidity: 5%~85%, relative humidity, non-condensing - Protection class: IP66 (front), IP20 (rear)
		Dimensions	<ul style="list-style-type: none"> - Faceplate LxH: 282 x 197mm - Cutout AxH: 271 x 186mm - Depth D+T: 29 + 6mm
Interface	<ul style="list-style-type: none"> - Ethernet: 1 x 10/100Mbit - USB: 1 x host V2.0, max. 500 mA - Serial: 1 x RS232/422/485 software configuration 	Certifications	<ul style="list-style-type: none"> - CE (Emission EN61000-6-4; Immunity EN61000-6-2 for installation in industrial environments) - CE (Emission EN61000-6-3; Immunity EN61000-6-1 for installation in residential environments) - cULus (UL508 Listed)

Ordering Information

• eSMART10N (P/N: 10IE0001005X0) +ESMA010AN301

10.1" widescreen TFT WSVGA touchscreen with Ethernet and USB interfaces. JMobile run-time

* Note: This product is only for Taiwan, China, Thailand, Vietnam, Philippines, Korea, UAE and Saudi Arabia.



Main Features

- Quad core Intel® Celeron® processor J1900 2GHz
- 18.5" WXGA (1366 x 768) P-cap zero bezel touch display
- 2MP front webcam with autofocus
- 4GB of DDR3L SO-DIMM memory
- 320GB 5,400rpm 2.5" HDD
- Ultra slim 64.5mm
- VESA mounting (100 x 100mm)
- 24VDC 120W Power brick

Product Overview

NEXCOM has released the Kiosk Panel PC KPPC 1812 to help build a smart future-proof kiosk that can evolve with changing needs of retail and hospitality industries. Based on Intel® Celeron® J1900 processor, the KPPC 1812 can power multimedia contents for advertising and enable multiple ways of user interaction for self-servicing. The KPPC 1812 is designed with expansion flexibility and ease of use and maintenance and can maximize kiosk uptime and lower total cost of ownership (TCO) for users.

Specifications

System Processor

- Motherboard: NP-BYT0-A/NC-DK0-A
- Processor: Intel® Celeron® J1900 Processor, 4C, 2.0GHz, 2MB Cache
- System Memory:
 - 1 x DDR3L 1333 SO-DIMM
 - Default: 1 x SO-DIMM DDR3L 1333 4GB
 - Optional: 1 x SO-DIMM DDR3L 1333 8GB
- Graphics: Integrated graphics controller, Intel's Gen 7 graphics and media encode/decode engine

LCD Touch Screen

- LCD Size: 18.5" TFT WXGA (1366x768) 250cd/m² LCD panel
- Touch Screen: 18.5" Projected Capacitive Touch Panel

Storage Device

- 1 x 2.5" SATA HDD 320GB 5,400rpm w/ HDD Door

Expansion

- 1 x Full size Mini-Card slot (mini-PCIe/USB/3G SIM slot)
- 1 x Half size Mini-Card slot (mini-PCIe/USB)

Rear I/O

- Serial (4):
 - 2 x RJ-50 Powered RS-232 (COM1, COM2, adjust RI/5V by BIOS setting)
 - 1 x RJ-50 Powered RS-232 (COM3, adjust RI/ 12V by BIOS setting)
 - 1 x RJ-50 Powered RS-232/422/485 (COM4, adjust RI/12V & RS232/422/485 by BIOS setting)

- USB (2/2): 2 x USB 2.0; 2 x USB 3.0
- Parallel: 1 x DB-25 Parallel Port
- LAN: 1 x RJ-45 (10/100/1000Mbps Ethernet)
- VGA: 1 x DB-15 VGA port for 2nd Display
- Cash Drawer Port: 1 x RJ-11, support Two Cash Drawers (24V, Max 1.1A)
- DC-in Jack: 1 x DC-24V Input
- DC-out Jack: 1 x DC-12V Output for 2nd Display Power (12V, Max 3.0A)
- Line-out/Mic: 1 x Line-out for External Audio Speaker & Mic-in

Audio

- 1 x System Buzzer

System Control

- 1 x Power ON/OFF Switch


Power

- Default: External AC DC 24V/5.0A 120W Power Brick
- Optional: Upgrade to DC-24V 180W Power Brick

Kits/Peripherals

- Web Camera: Default: build-in 2M Auto Focus Web CAM, USB interface
- MSR: Optional: ISO 3 Tracks MSR (USB/RS232 combo interface or PS/2)
- MSR/ Fingerprint Combo: Optional: ISO 3 Tracks MSR (PS/2) & Fingerprint (USB) combo
- RFID/ NFC: Optional: RFID Mifare Read/ Write Module; NFC Contactless Reader Module
- Scanner: Optional: 2D Scanner
- Thermal Printer: Optional: 2"/3" Thermal Printer

Dimension Drawing

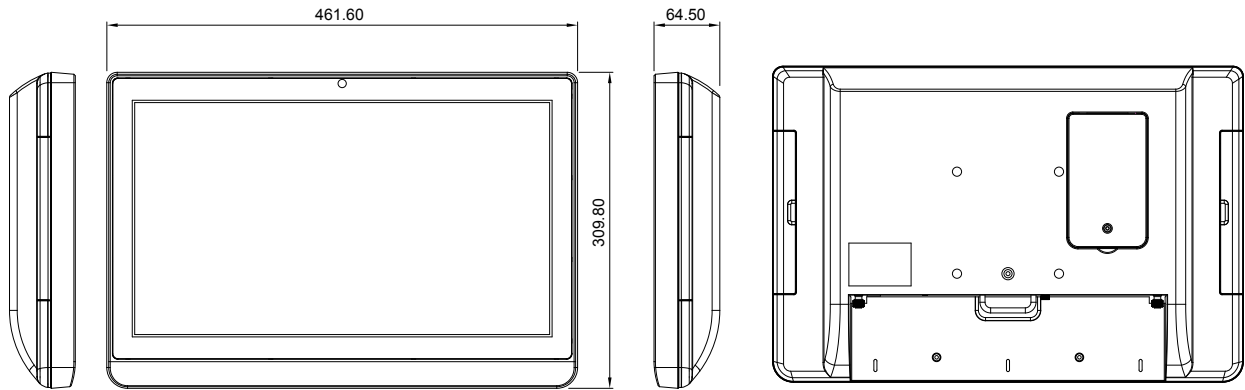

Environment

- Operating Temperature: 0°C to 40°C (32°F ~ 104°F)
- Storage Temperature: -20°C to 60°C (-4°F ~ 140°F)
- Operating Humidity: 20% to 80% RH non-condensing
- Storage Humidity: 20% ~ 85% RH non-condensing

Dimension

- Display Head: 461.6mm (W) x 309.8mm (H) x 64.5mm (D)
- Package Size: 585mm (L) x 235mm (W) x 450mm (H) (No MSR)

Weight

- Net Weight/Gross Weight: 9.0kg (19.8lbs)/10.5kg (23.2lbs)

Operating System

- Windows 8
- WES 8
- POSReady 7
- Win 7 Pro
- WES 7
- Fedora 17
- TIZEN

Certificate

- EMC & Safety
- FCC/CE/LVDS

Ordering Information

◆ KPPC-1812-010 (P/N: A0YK0181200X0)

- CPU: Intel® Celeron® J1900 Processor, 4C, 2.0 GHz, 2MB Cache
- LCD/ Touch: 18.5" TFT WXGA (1366x768) 250 cd/m² LCD panel/ Projected Capacitive Zero Bezel Touch
- Memory: 4GB DDR3L SO-DIMM
- HDD: 320GB 2.5" SATA 5,400rpm
- Power: DC-24V/120W Power Brick
- Color: Black
- Web Camera: Build-in 2M Auto Focus Web Camera



Main Features

- Intel Atom® processor E39xx processor family (Apollo Lake)
- 10.1" WXGA (1280 x 800) P-cap touch display
- 4GB of DDR3L SO-DIMM memory
- Panel Mount & VESA mounting supported (100 x 100mm)
- 12VDC 50W Power brick
- Ultra Slim Design
- Front IP65 Water & Dust Proof

Product Overview

NEXCOM has released the Kiosk Panel PC KPPC 1057 to help build a smart future-proof kiosk that can evolve with changing needs of retail and hospitality industries. Based on Intel Atom® E39XX processor, the KPPC 1057 can power multimedia contents for advertising and enable multiple ways of user interaction for self-servicing. The KPPC 1057 is designed with expansion flexibility and ease of use and maintenance and can maximize kiosk uptime and lower total cost of ownership (TCO) for users.

Specifications

Motherboard

- EBC-357X

Processor

- Intel Atom® E39xx processor family, 14nm core, Quad/Dual Core, 1.8/2.0GHz

System Memory

- 1 x DDR3L 1333 SO-DIMM
- Default: 1 x SO-DIMM DDR3L 1333 4GB
- Optional: 1 x SO-DIMM DDR3L 1333 8GB

Graphics

- Intel® HD Graphics 500/505

LCD Touch Screen

- LCD Size: 10.1" TFT WXGA (1280x800) 350cd/m² LCD panel
- Touch Screen: 10.1" Projected Capacitive Touch Panel

Storage Device

- 1 x 2.5" SATA HDD

Expansion

- 1 x Half size mini-PCIe slot
- 1 x NGFF (M.2) B Key

Rear I/O

- Serial:
 - 1 x RS232, 422, 485 selectable
- USB: 4 x USB 3.0 A Type
- LAN: 2 x RJ-45 (10/100/1000Mbps Ethernet)
- VGA: 1 x DB-15 VGA port for 2nd Display
- HDMI: 1 x HDMI 1.4 Out
- Audio/Mic: 1 x Line-out for External Speaker & Mic-in
- DC-in Jack: 1 x DC-12V Input

System Control

- 1 x Power ON Button

Power

- External AC to DC 12V/4.16A 50W Power Brick


Environment

- Operating Temperature: 0°C to 50°C (32°F to 122°F)
- Storage Temperature: -20°C to 60°C (-4°F to 140°F)
- Operating Humidity: 20% to 80% RH non-condensing
- Storage Humidity: 20% to 85% RH non-condensing

Dimension

- Display Head: 308 x 223 x 61.2 mm
- Package Size: TBD

Dimension Drawing

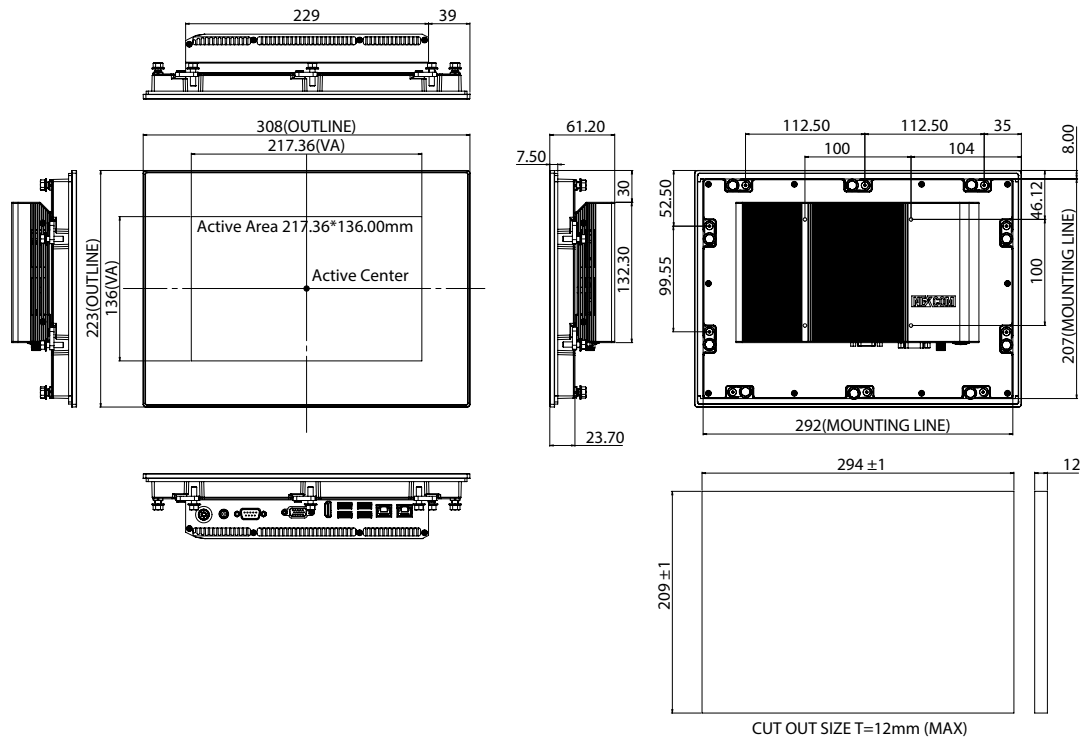

Weight

- Net Weight/Gross Weight: 5.0kg (11.02lbs)/6kg (13.23lbs)

Operating System

- Windows 10 IoT
- Windows 7 Pro
- Windows Embedded Standard 7
- POSReady 7
- Fedora 17

Certificate

- EMC & Safety
- FCC/CE

Ordering Information

◆ KPPC 1057 (P/N: TBD)

- CPU: Intel Atom® EX39xx Processor, 2/4C, 1.8/2.0 GHz, 2MB Cache
- LCD: 10.1" TFT WXGA (1280x800) 350 cd/m² LCD panel/
- Touch: Projected Capacitive Touch Screen
- Memory: 4GB DDR3L SO-DIMM
- HDD: 2.5" SATA HDD or 2.5" SSD
- Power: DC-12V/50W Power Brick
- Color: Black



Main Features

- Intel® Celeron® N3060 (Braswell) Dual Core Processor
- 15.6" WXGA (1366 x 768) P-cap touch display
- 4GB of DDR3L SO-DIMM memory
- Panel Mount & VESA mounting supported (100 x 100mm)
- 12VDC 84W Power brick
- Ultra Slim Design
- Front IP65 Water & Dust Proof

Product Overview

NEXCOM has released the Kiosk Panel PC KPPC 1514 to help build a smart future-proof kiosk that can evolve with changing needs of retail and hospitality industries. Based on Intel® Celeron® processor, the KPPC 1514 can power multimedia contents for advertising and enable multiple ways of user interaction for self-servicing. The KPPC 1514 is designed with expansion flexibility and ease of use and maintenance and can maximize kiosk uptime and lower total cost of ownership (TCO) for users.

Specifications

Motherboard

- NEX-614A

Processor

- Intel® Celeron® N3060 (Braswell) Dual Core Processor 1.60 GHz (6W)

System Memory

- 1 x DDR3L 1600 SO-DIMM
- Default: 1 x SO-DIMM DDR3L 1600 4GB
- Optional: 1 x SO-DIMM DDR3L 1600 8GB

Graphics

- Intel® HD Graphics 400

LCD Touch Screen

- LCD Size: 15.6" TFT WXGA (1366x768) 300cd/m² LCD panel
- Touch Screen: 15.6" Projected Capacitive Touch Panel

Storage Device

- 1 x 2.5" SATA HDD

Expansion

- 1 x ini-PCIe slot (Full Size)
- 1 x NGFF (M.2) M Key (2242/2280)
- 1 x PCIe by 1

Rear I/O

- Serial:

- 4 x RS232
- 1 x RS232,422,485 selectable
- USB: 4 x USB 3.0 A Type
- LAN: 2 x RJ-45 (10/100/1000Mbps Ethernet)
- VGA: 1 x D-Sub15
- DVI: 1 x DVI D
- Audio: 1 x Line-out / Mic-in
- DC-in Jack: 1 x DC-12V Input

System Control

- 1 x Power ON Button

Power

- External AC to DC 12V/7A 84W Power Brick

Environment

- Operating Temperature: 0°C to 50°C (32°F to 122°F)
- Storage Temperature: -20°C to 60°C (-4°F to 140°F)
- Operating Humidity: 20% to 80% RH non-condensing
- Storage Humidity: 20% to 85% RH non-condensing


Dimension

- Dimension: 417.8 x 312.8 x 63.55 mm
- Package Size: TBD

Weight

- Net Weight/Gross Weight: 6.6kg (14.55lbs)/7.8kg (17.20lbs)

Dimension Drawing

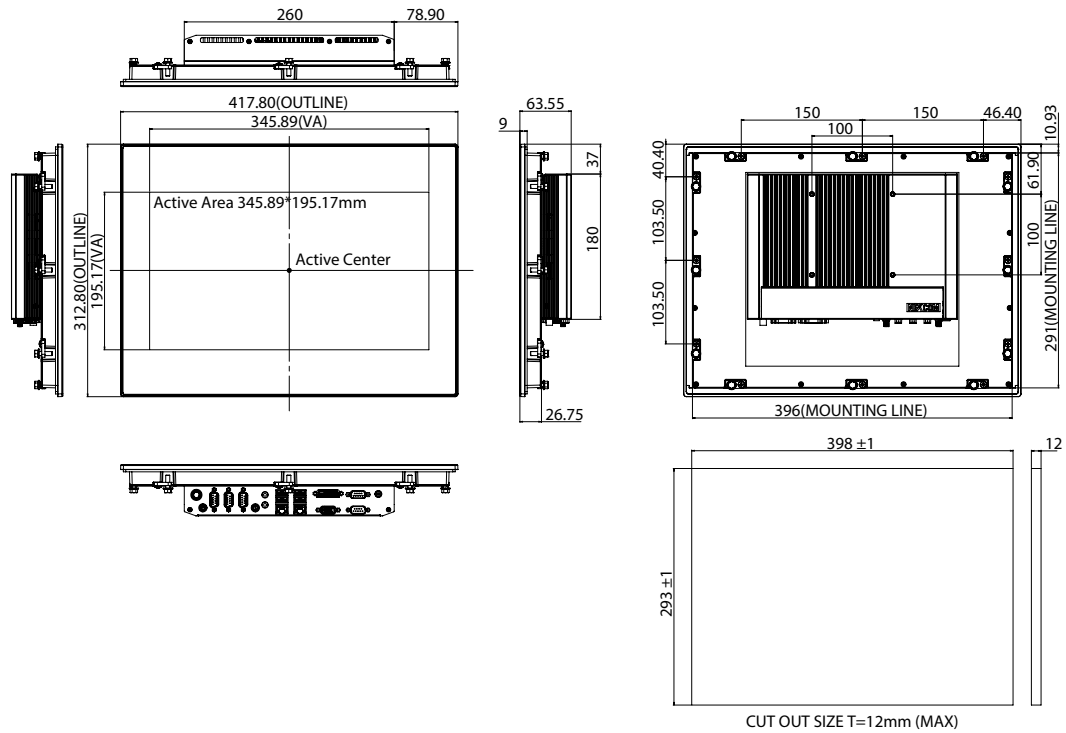

Operating System

- Windows 10 IoT
- Windows 7 Pro
- Windows Embedded Standard 7

Certificate

- EMC & Safety
- FCC/CE

Ordering Information

♦ KPPC 1514 (P/N: TBD)

- CPU: Intel® Celeron® N3060 (Braswell) Dual Core Processor 1.60 GHz (6W)
- LCD: 15.6" TFT WXGA (1366x768) 300 cd/m² LCD panel/
- Touch: Projected Capacitive Touch Screen
- Memory: 4GB DDR3L SO-DIMM
- HDD: 2.5" SATA HDD or 2.5" SSD
- Power: DC-12V/84W Power Brick
- Color: Black



Main Features

- Intel® Celeron® N3060 (Braswell) Dual Core Processor
- 18.5" WXGA (1366 x 768) P-cap touch display
- 4GB of DDR3L SO-DIMM memory
- Panel Mount & VESA mounting supported (100 x 100mm)
- 12VDC 84W Power brick
- Ultra Slim Design
- Front IP65 Water & Dust Proof

Product Overview

NEXCOM has released the Kiosk Panel PC KPPC 1814 to help build a smart future-proof kiosk that can evolve with changing needs of retail and hospitality industries. Based on Intel® Celeron® processor, the KPPC 1814 can power multimedia contents for advertising and enable multiple ways of user interaction for self-servicing. The KPPC 1814 is designed with expansion flexibility and ease of use and maintenance and can maximize kiosk uptime and lower total cost of ownership (TCO) for users.

Specifications

Motherboard

- NEX-614A

Processor

- Intel® Celeron® N3060 (Braswell) Dual Core Processor 1.60 GHz (6W)

System Memory

- 1 x DDR3L 1600 SO-DIMM
- Default: 1 x SO-DIMM DDR3L 1600 4GB
- Optional: 1 x SO-DIMM DDR3L 1600 8GB

Graphics

- Intel® HD Graphics 400

LCD Touch Screen

- LCD Size: 18.5" TFT WXGA (1366x768) 250cd/m² LCD panel
- Touch Screen: 18.5" Projected Capacitive Touch Panel

Storage Device

- 1 x 2.5" SATA HDD

Expansion

- 1 x mini-PCIe slot (Full Size)
- 1 x NGFF (M.2) M Key (2242/2280)
- 1 x PCIe by 1

Rear I/O

- Serial:

- 4 x RS232
- 1 x RS232,422,485 selectable
- USB: 4 x USB 3.0 A Type
- LAN: 2 x RJ-45 (10/100/1000Mbps Ethernet)
- VGA: 1 x D-Sub15
- DVI: 1 x DVI D
- Audio: 1 x Line-out / Mic-in
- DC-in Jack: 1 x DC-12V Input

System Control

- 1 x Power ON Button

Power

- External AC to DC 12V/7A 84W Power Brick

Environment

- Operating Temperature: 0°C to 50°C (32°F to 122°F)
- Storage Temperature: -20°C to 60°C (-4°F to 140°F)
- Operating Humidity: 20% to 80% RH non-condensing
- Storage Humidity: 20% to 85% RH non-condensing


Dimension

- Display Head: 490.8 x 320.6 x 59.45mm
- Package Size: TBD

Weight

- Net Weight/Gross Weight: 7.6kg (16.76lbs)/8.7kg (19.18lbs)

Dimension Drawing

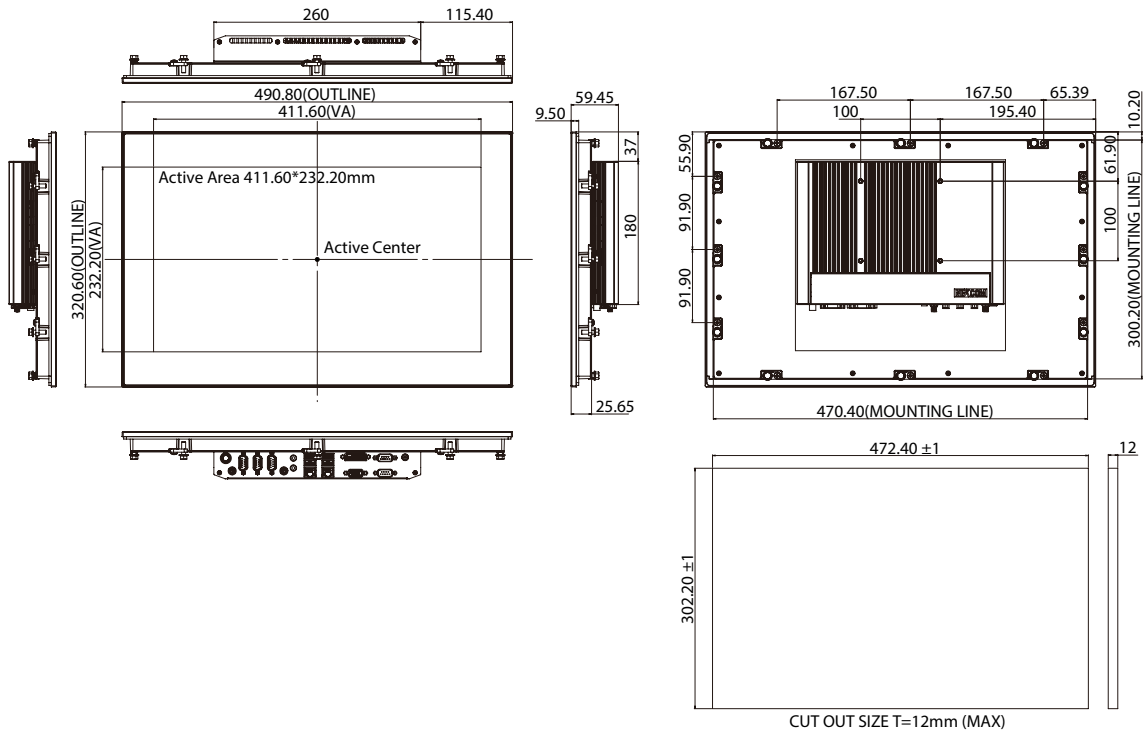

Operating System

- Windows 10 IoT
- Windows 7 Pro
- Windows Embedded Standard 7

Certificate

- EMC & Safety
- FCC/CE

Ordering Information

♦ KPPC 1814 (P/N: TBD)

- CPU: Intel® Celeron® N3060 (Braswell) Dual Core Processor 1.60 GHz (6W)
- LCD: 18.5" TFT WXGA (1366x768) 250 cd/m² LCD panel
- Touch: Projected Capacitive Touch Screen
- Memory: 4GB DDR3L SO-DIMM
- HDD: 2.5" SATA HDD or 2.5" SSD
- Power: DC-12V/84W Power Brick
- Color: Black



Main Features

- Intel® Celeron® N3060 (Braswell) Dual Core Processor
- 21.5" FHD (1920 x 1080) P-cap touch display
- 4GB of DDR3L SO-DIMM memory
- Panel Mount & VESA mounting supported (100 x 100mm)
- 12VDC 84W Power brick
- Ultra Slim Design
- Front IP65 Water & Dust Proof

Product Overview

NEXCOM has released the Kiosk Panel PC KPPC 2114 to help build a smart future-proof kiosk that can evolve with changing needs of retail and hospitality industries. Based on Intel® Celeron® processor, the KPPC 2114 can power multimedia contents for advertising and enable multiple ways of user interaction for self-servicing. The KPPC 1814 is designed with expansion flexibility and ease of use and maintenance and can maximize kiosk uptime and lower total cost of ownership (TCO) for users.

Specifications

Motherboard

- NEX-614A

Processor

- Intel® Celeron® N3060 (Braswell) Dual Core Processor 1.60 GHz (6W)

System Memory

- 1 x DDR3L 1600 SO-DIMM
- Default: 1 x SO-DIMM DDR3L 1600 4GB
- Optional: 1 x SO-DIMM DDR3L 1600 8GB

Graphics

- Intel® HD Graphics 400

LCD Touch Screen

- LCD Size: 21.5" TFT FHD (1920x1080) 250cd/m² LCD panel
- Touch Screen: 21.5" Projected Capacitive Touch Panel

Storage Device

- 1 x 2.5" SATA HDD

Expansion

- 1 x mini-PCIe slot (Full Size)
- 1 x NGFF (M.2) M Key (2242/2280)
- 1 x PCIe by 1

Rear I/O

- Serial:

- 4 x RS232
- 1 x RS232,422,485 selectable
- USB: 4 x USB 3.0 A Type
- LAN: 2 x RJ-45 (10/100/1000Mbps Ethernet)
- VGA: 1 x D-Sub15
- DVI: 1 x DVI D
- Audio: 1 x Line-out / Mic-in
- DC-in Jack: 1 x DC-12V Input

System Control

- 1 x Power ON Button

Power

- External AC to DC 12V/7A 84W Power Brick

Environment

- Operating Temperature: 0°C to 50°C (32°F to 122°F)
- Storage Temperature: -20°C to 60°C (-4°F to 140°F)
- Operating Humidity: 20% to 80% RH non-condensing
- Storage Humidity: 20% to 85% RH non-condensing


Dimension

- Display Head: 562.4 x 382.4 x 59.65mm
- Package Size: TBD

Weight

- Net Weight/Gross Weight: 7.6kg (16.76lbs)/8.7kg (19.18lbs)

Dimension Drawing

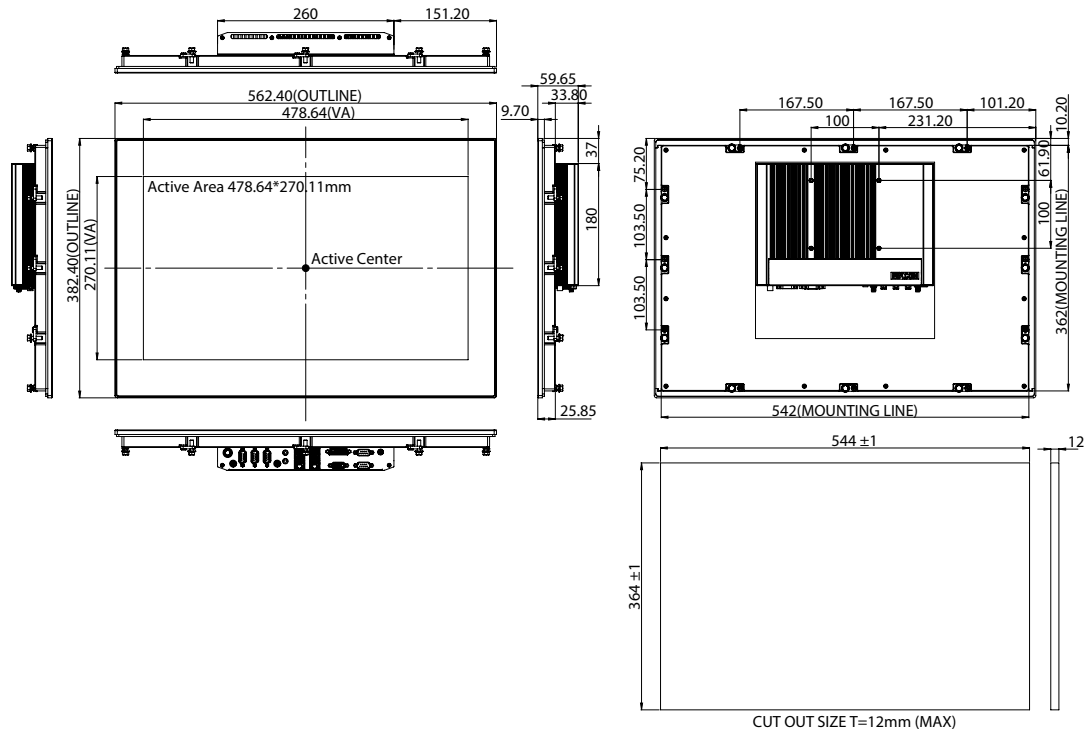

Operating System

- Windows 10 IoT
- Windows 7 Pro
- Windows Embedded Standard 7

Certificate

- EMC & Safety
- FCC/CE

Ordering Information

♦ KPPC 2114 (P/N: TBD)

- CPU: Intel® Celeron® N3060 (Braswell) Dual Core Processor 1.60 GHz (6W)
- LCD: 21.5" TFT WXGA (1920x1080) 250 cd/m² LCD panel
- Touch: Projected Capacitive Touch Screen
- Memory: 4GB DDR3L SO-DIMM
- HDD: 2.5" SATA HDD or 2.5" SSD
- Power: DC-12V/84W Power Brick
- Color: Black



Main Features

- Quad core Intel® Celeron® processor J1900 2GHz
- 4GB of DDR3L SO-DIMM memory
- 15" 4:3 XGA(1024*768) 5 Wire-Resistive touch display with IP65 rated front panel
- Fanless design
- 320GB 5,400rpm 2.5" HDD
- 2 x Mini-PCIe, 4 x COM, 2 x USB 3.0, 2 x USB 2.0, 1 x VGA, 1 x GbE LAN
- 24VDC 120W Power brick
- Optional peripheral expansion: MSR, fingerprint, VFD, 2nd display, cash drawer, scanner

Product Overview

NEXCOM has released the fanless POS NPT 1560 to help increase checkout speed and sales at checkout counters. Powered by Intel® Celeron® processor J1900, the fanless POS NPT 1560 embodies high responsiveness, dual-display capability and ease of maintenance features, aimed to help kill off long checkout lines and generate more revenue for retailers and restaurants.

Specifications

System Processor

- Motherboard: NP-BYT0-B/C/D
- Processor: Intel® Celeron® processor J1900, 4C, 2.0 GHz, 2MB Cache
- Chipset: Integrated in Intel® Atom™ SoC
- System Memory: 1 x SO-DIMM DDR3L 1333 4GB
- Graphics: Integrated graphics controller, Intel's Gen 7 graphics and media encode/decode engine

LCD Touch Screen

- LCD Size: 15" TFT XGA (1024x768) 250cd/m² LED Panel
- Touch Screen: 15" 5-wire Resistive Touch Panel
- Tilt Angle: 0° ~ 80°

Storage Device

- 1 x 2.5" SATA HDD 320GB 5,400rpm Removable type

Expansion

- 1 x Full size mini-Card slot (mini-PCIe/USB/3G SIM slot)
- 1 x Half size mini-Card slot(mini-PCIe/USB)

Rear I/O

- Serial port: 4 x DB-9 Powered RS-232 (adjust RI/5V/12V by BIOS setting)
- USB port: 2 x USB 3.0, 2 x USB 2.0
- Parallel port: 1 x DB-25 Parallel Optional
- LAN Port: 1 x RJ-45 (10/100/1000Mbps Ethernet)
- VGA: 1 x DB-15 VGA
- Cash Drawer Port: 1 x RJ-11, support Two Cash Drawers (24V, Max 1.1A)
- DC-IN Jack: 1 x DC-24V Input
- DC-OUT Jack: 1 x DC-12V Output for 2nd Display Power (12V, Max 3.0A)

- Line-OUT/MIC: 1 x Line-OUT for External Audio Speaker

Audio

- 1 x System Buzzer

System Control/Indicator

- Power Switch: 1 x Power ON/OFF switch
- Power LED: 1 x Power ON LED (Green)

Power

- External AC DC 24V/5A 120W Power Brick

Peripheral (Optional)

- MSR: ISO 3 Tracks MSR (USB/RS-232 combo interface or PS/2)
- MSR/Fingerprint Combo: ISO 3 Tracks MSR (PS/2) & Fingerprint (USB) combo
- Customer Display: 2 x 20 VFD customer display
- 2nd Display: 15" LCD monitor


Environment

- Operating Temperature: 0°C ~ 40°C (32°F ~ 104°F)
- Storage Temperature: -20°C ~ 60°C (-4°F ~ 140°F)
- Operating Humidity: 20% - 80% RH non-condensing
- Storage Humidity: 20% - 85% RH non-condensing

Dimension

- 80° tilt angle: 368mm (W) x 331mm (H) x 210mm (D) (No MSR)
- 80° tilt angle w/ MSR: 410mm (W) x 331mm (H) x 210mm (D)
- Display Head: 368mm (W) x 282mm (H) x 69.9mm (D)
- Display Head w/ MSR: 410mm (W) x 282mm (H) x 69.9mm (D)

Dimension Drawing

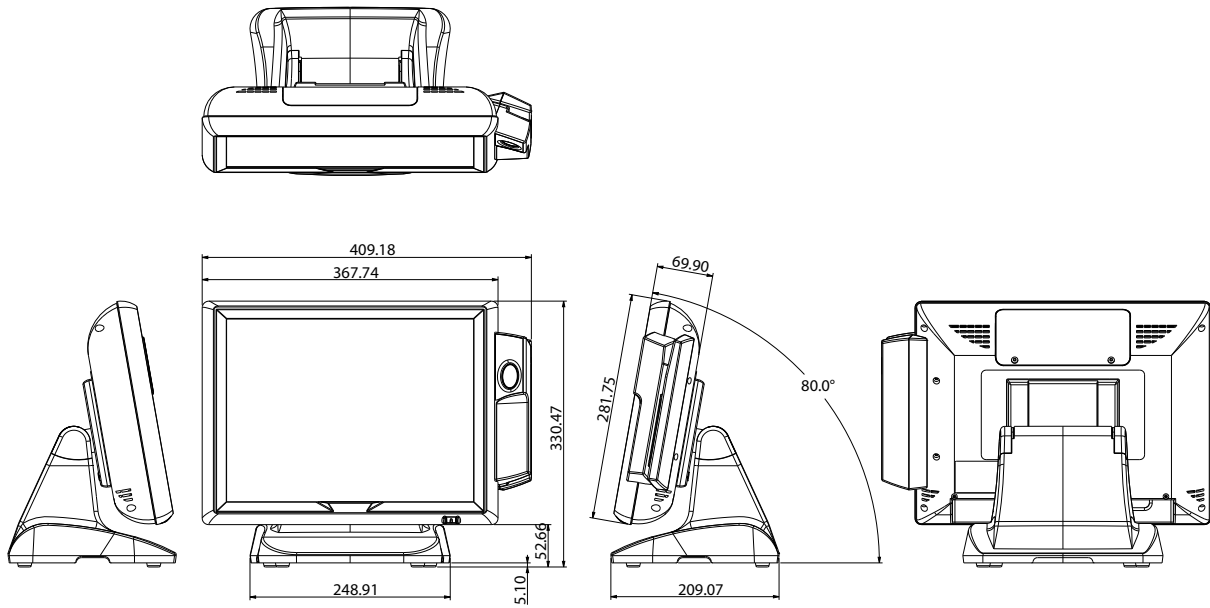

- Footprint: 249mm (W) x 209mm (D)
- Package Size: 490mm (L) x 390mm (W) x 400mm (H) (No MSR)
560mm (L) x 390mm (W) x 350mm (H) (W/ MSR)

Weight

- Net Weight: 8.0kg (17.6lbs)
- Gross Weight: 9.5kg (20.9lbs)

Operating System

- Windows: Windows 8, WES 8, POS 7, Win 7 Pro, WES 7
- Linux: Fedora 17, TIZEN

Certificate

- FCC/CE/LVD

Ordering Information

- ♦ **NPT 1560-036 (P/N: A0Y00156000X0)**
 - CPU: Intel® Celeron® processor J1900 2GHz
 - LCD/Touch: 15" XGA 1024 x 768 250nits with LED backlight/5-wire resistive touch display
 - Memory: 4GB DDR3 SO-DIMM
 - HDD: 320GB 2.5" SATA 5,400rpm
 - Power: DC-24V/120W Power Brick
 - Color: Black



Main Features

- Quad core Intel® Celeron® processor J1900 2GHz
- 4GB of DDR3L SO-DIMM memory
- 15" 4:3 XGA (1024x768) P-cap true flat touch display with IP65-rated front panel
- Fanless design
- 320GB 5,400rpm 2.5" HDD
- 2 x Mini-PCIe, 4 x COM, 2 x USB 3.0, 2 x USB 2.0, 1 x VGA, 1 x GbE LAN
- 24VDC 120W Power brick
- Optional peripheral expansion: MSR, fingerprint, VFD, 2nd display, cash drawer, scanner

Product Overview

NEXCOM has released the fanless POS NPT 1562 to help increase checkout speed and sales at checkout counters. Powered by Intel® Celeron® processor J1900, the fanless POS NPT 1562 embodies high responsiveness, dual-display capability and ease of maintenance features, aimed to help kill off long checkout lines and generate more revenue for retailers and restaurants.

Specifications

System Processor

- Motherboard: NP-BYT0-B/C/D
- Processor: Intel® Celeron® processor J1900, 4C, 2.0 GHz, 2MB Cache
- Chipset: Integrated in Intel® Atom™ SoC
- System Memory: 1 x SO-DIMM DDR3L 1333 4GB
- Graphics: Integrated graphics controller, Intel's Gen 7 graphics and media encode/decode engine

LCD Touch Screen

- LCD Size: 15" TFT XGA (1024x768) 250cd/m² LED Panel
- Touch Screen: 15" Zero Bezel Projected Capacitive Touch Panel
- Tilt Angle: 0° ~ 80°

Storage Device

- 1 x 2.5" SATA HDD 320GB 5,400rpm Removable type

Expansion

- 1 x Full size mini-Card slot (mini-PCIe/USB/3G SIM slot)
- 1 x Half size mini-Card slot (mini-PCIe/USB)

Rear I/O

- Serial port: 4 x DB-9 Powered RS-232 (adjust RI/5V/12V by BIOS setting)
- USB port: 2 x USB 3.0, 2 x USB 2.0
- Parallel port: 1 x DB-25 Parallel Optional
- LAN Port: 1 x RJ-45 (10/100/1000Mbps Ethernet)
- VGA: 1 x DB-15 VGA
- Cash Drawer Port: 1 x RJ-11, support Two Cash Drawers (24V, Max 1.1A)
- DC-IN Jack: 1 x DC-24V Input
- DC-OUT Jack: 1 x DC-12V Output for 2nd Display Power (12V, Max 3.0A)

- Line-OUT/MIC: 1 x Line-OUT for External Audio Speaker

Audio

- 1 x System Buzzer

System Control/Indicator

- Power Switch: 1 x Power ON/OFF switch
- Power LED: 1 x Power ON LED (Green)

Power

- External AC DC 24V/5A 120W Power Brick

Peripheral (Optional)

- MSR: ISO 3 Tracks MSR (USB/RS-232 combo interface or PS/2)
- MSR/Fingerprint Combo: ISO 3 Tracks MSR (PS/2) & Fingerprint (USB) combo
- Customer Display: 2 x 20 VFD customer display
- 2nd Display: 15" LCD monitor


Environment

- Operating Temperature: 0°C ~ 40°C (32°F ~ 104°F)
- Storage Temperature: -20°C ~ 60°C (-4°F ~ 140°F)
- Operating Humidity: 20% - 80% RH non-condensing
- Storage Humidity: 20% - 85% RH non-condensing

Dimension

- 80° tilt angle: 366mm (W) x 331mm (H) x 210mm(D) (No MSR)
- 80° tilt angle W/ MSR: 419mm (W) x 331mm (H) x 210mm (D)
- Display Head: 366mm (W) x 280mm (H) x 64.5mm (D)
- Display Head W/ MSR: 419mm (W) x 280mm (H) x 64.5mm (D)
- Footprint: 249mm (W) x 209mm (D)

Dimension Drawing

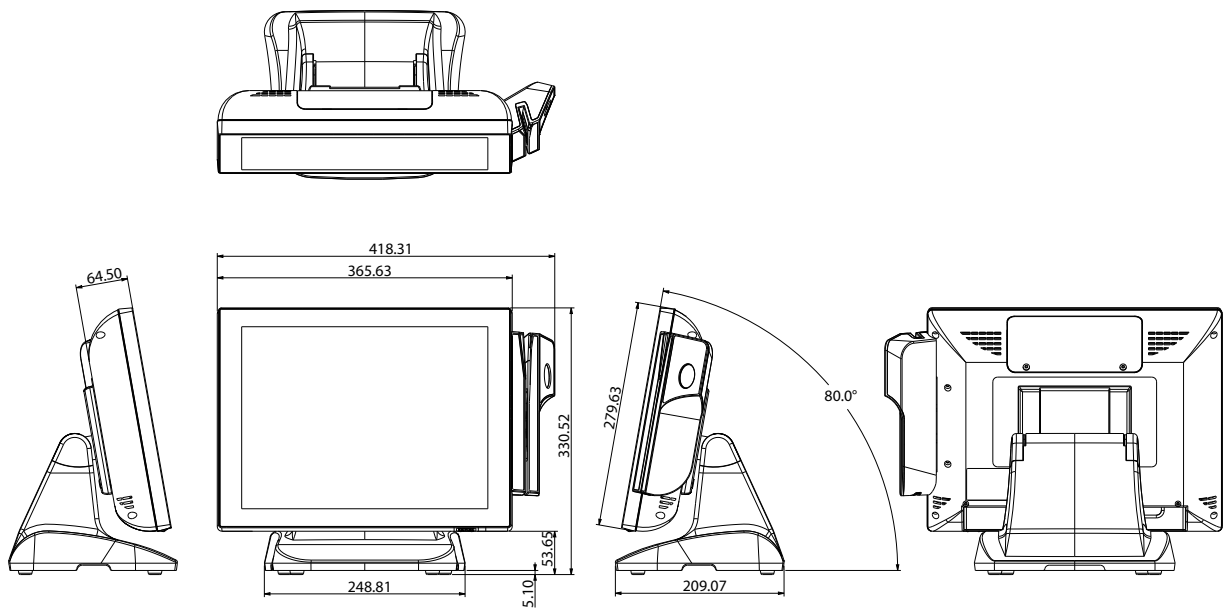

- Package Size: 490mm (L) x 390mm (W) x 400mm (H) (No MSR)
560mm (L) x 390mm (W) x 350mm (H) (W/ MSR)

Weight

- Net Weight: 8.0kg (17.6lbs)
- Gross Weight: 9.5kg (20.9lbs)

Operating System

- Windows: Windows 8, WES 8, POS 7, Win 7 Pro, WES 7
- Linux: Fedora 17, TIZEN

Certificate

- FCC/CE/LVD

Ordering Information

- ♦ **NPT 1562-036 (P/N: A0Y00156200X0)**
 - CPU: Intel® Celeron® processor J1900 2GHz
 - LCD/Touch: 15" XGA 1024 x 768 250nits with LED backlight/P-cap true flat touch display
 - Memory: 4GB DDR3 SO-DIMM
 - HDD: 320GB 2.5" SATA 5,400rpm
 - Power: DC-24V/120W Power Brick
 - Color: Black



Main Features

- 15" 4:3 XGA (1024 x 768) TFT LCD panel
- 15" 5-wire resistive touch screen
- 2nd/3rd generation Intel® Core™ i3/i5/i7 processor
- Support DDR3 1333 SO-DIMM memory
- 2.5" removable SATA HDD
- Powered COM (4), USB (4), printer port (1), VGA (1), GbE LAN (1), cash drawer (1)
- Front bezel complies with IP-65 protection standard
- Option kits for MSR/Fingerprint/VFD
- Optional VESA 100 x 100mm mounting for wall-mount application

Product Overview

The NPT 5850 is a high performance Point-of-Sale (POS) hardware solution to fulfill your POS hardware requirement. Removable HDD, MSR, fingerprint and VFD kit design provides an easy maintenance method and saving your service cost. The +12VDC output provides sufficient power for your 2nd display from POS terminal and offers better cable routing and high-integration for the 2nd display. Small footprint is ideal for installations where space is compact in stores. The VESA mounting design of display head, only 100 x 100mm, provides another option for wall-mounting application when detaching the stand of terminal. The design offers a spill resistant and high integration for POS peripherals, which provides restaurant and retail conditions with continuous operation.

Specifications

Panel

- LCD Size: 15", 4:3
- Resolution: XGA 1024 x 768
- Luminance: 250cd/m²
- Contrast ratio: 700
- LCD color: 16.2M
- Viewing angle: 80 (upper), 80 (lower), 85 (left), 85 (right)
- Backlight: CCFL/LED
- Touch screen: 5-wire Resistive
- Touch light transmission: 80%
- Touch interface: USB

System

- CPU:
 - Default: Intel® Pentium® processor B950, 2C/2T, 2.10 GHz, 2MB Cache
 - Upgrade Optional: 2nd generation Intel® Core™ mobile processor: i7-2710QE, 4C/8T, 2.1GHz, 6MB Cache; i5-2510E, 2C/4T, 2.5GHz, 3MB Cache; i3-2330E, 2C/4T, 2.2GHz, 3MB Cache
 - Optional: Intel® Celeron® processor B810, 2C/2T, 1.60 GHz, 2M Cache
- BIOS: AMI BIOS
- System chipset: Intel® HM65
- System memory: 1 x 204-pin DDR3 1333 SO-DIMM socket, 2GB DDR3 (default), optional two sockets support up to 8GB DDR3 1333,

non-ECC and un-buffered

- Hard disk drive: One 2.5" 320 GB SATA HDD, removable type
- Expansion: 1 x Mini-card socket for Mini-PCIe and USB interface

Rear I/O

- USB: 4 x USB 2.0 port
- COM: 4 x DB-9 powered RS-232 port, adjust RI/5V/12V by BIOS setting
- Ethernet: 1 x RJ-45, 10/100/1000 Mbps
- VGA: 1 x DB-15 2nd VGA port
- Cash drawer: 1 x RJ-11 port, support two cash drawers (24V, Max 1.1A)
- Parallel: 1 x DB-25 printer port
- Audio: 1 x Line-out jack
- DC-IN: 1 x +19VDC input, Mini-DIN 4Pin lock type
- DC-OUT: 1 x +12VDC output for 2nd display power (12V, Max 3.0A)

Audio

- High Definition audio codec: Realtek ALC886-GR
- Internal audio: One 3W speaker
- External audio: Line-out audio jack


Ethernet

- LAN chip: Intel® PHY WG82579LM Gigabit LAN
- Ethernet interface: 10/100/1000 Based-TX Ethernet compatible

Mechanical & Environment

- Color: Iron gray/black

Dimension Drawing

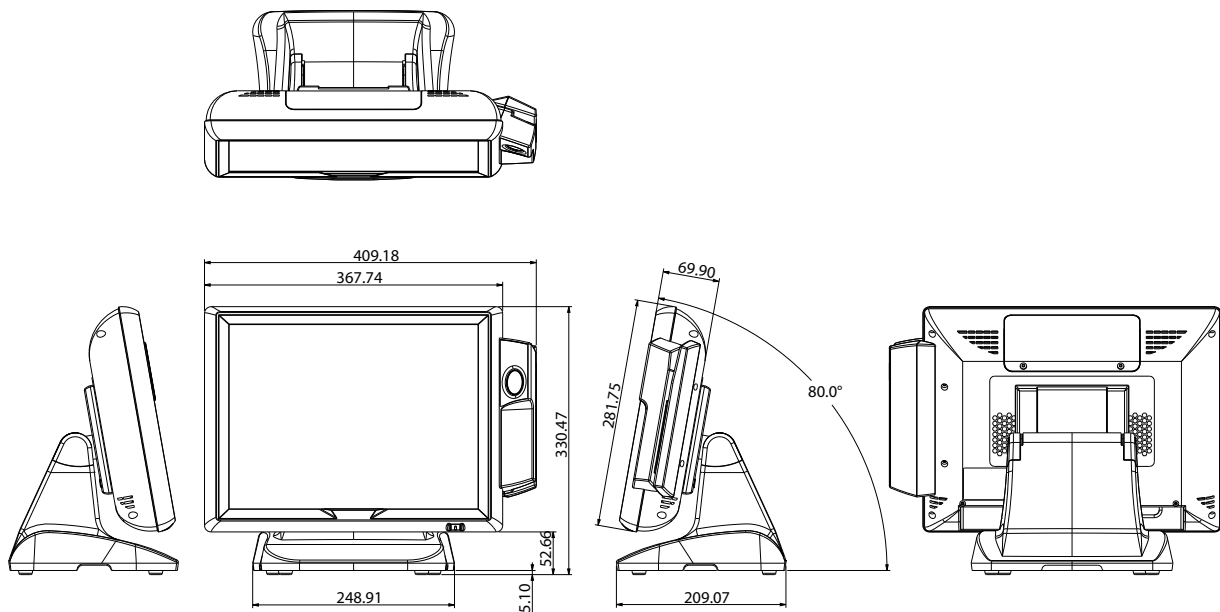

- Mounting: desktop type, optional VESA 100 x 100mm wall-mount when detaching stand
- IP protection: front bezel complies with IP-65 protection standard
- Power input: +19VDC
- Power adapter: AC to DC power brick (+19VDC/6.315A, 120W)
- Operating temperature: 0°C to 40°C
- Storage temperature: -20°C to 60°C
- Operating humidity: 20% ~ 80% relative humidity, non-condensing
- Dimension: 368mm (W) x 331mm (H) x 210mm (D) (No MSR), 410mm (W) x 331mm (H) x 210mm (D) (with MSR)
- Weight: 8.5kg
- Tilt angle: 0° ~ 80°

Certifications

- CE approval
- FCC Class A

Ordering Information

◆ NPT 5850-035 (P/N: A0Y00585004X0)

- Color :Black
- CPU: Intel® Core™ i3/i5/i7 mobile processor,2C/2T,2.10GHz, 2MB cache
- LCD/Touch: 15" XGA 1024 x 768 250nits with LED Backlight/ELO 5-wire resistive touch
- Memory: 2GB DDR3 SO-DIMM
- HDD: 320GB 2.5" SATA 5,400rpm
- Power: +19VDC/120W power brick

◆ Options

- -3G module kit (P/N: BW00000023X00)
- WiFi module kit (P/N: TBD)



Main Features

- 15" 4:3 XGA (1024 x 768) TFT LCD panel
- 15" projected capacitive true flat touch screen
- 2nd/3rd generation Intel® Core™ i3/i5/i7 processor
- Support DDR3 1333 SO-DIMM memory
- 2.5" removable SATA HDD
- Powered COM (4), USB (4), printer port (1), VGA (1), GbE LAN (1), cash drawer (1)
- Front bezel complies with IP-65 protection standard
- Option kits for MSR/Fingerprint/VFD
- Optional VESA 100 x 100mm mounting for wall-mount application

Product Overview

The NPT 5852 is a high performance Point-of-Sale (POS) hardware solution to fulfill your POS hardware requirement. The stylish zero bezel design makes it easy for your POS Terminal to fit the modern store design. Projected Capacitive Touch Screen is the best reliable solution and Minimum service effort on Touch Screen.

Removable HDD, MSR, fingerprint and VFD kit design provides an easy maintenance method and saving your service cost. The +12VDC output provides enough power for your 2nd display from POS terminal, and offers better cable routing and high-integration for the 2nd display. Small footprint is ideal for installations where space is compact in stores. The VESA mounting design of display head, only 100 x 100mm, provides an option for Wall-mounting application when detaching the stand of terminal. The design offers a spill resistant and high integration for POS peripherals, which provides restaurant and retail conditions with continuous operation.

Specifications

Panel

- LCD Size: 15", 4:3
- Resolution: XGA 1024 x 768
- Luminance: 250cd/m²
- Contrast ratio: 700
- LCD color: 16.2M
- Viewing angle: 80 (upper), 80 (lower), 85 (left), 85(right)
- Backlight: CCFL/LED
- Touch screen: projected capacitive true flat (zero bezel)
- Touch light transmission: 91%
- Touch interface: USB

System

- CPU:
 - Default: Intel® Pentium® processor B950, 2C/2T, 2.10 GHz, 2MB Cache
 - Upgrade Optional: 2nd generation Intel® Core™ mobile processor: i7-2710QE, 4C/8T, 2.1GHz, 6MB Cache; i5-2510E, 2C/4T, 2.5GHz, 3MB Cache; i3-2330E, 2C/4T, 2.2GHz, 3MB Cache
 - Optional: Intel® Celeron® processor B810, 2C/2T, 1.60 GHz, 2M Cache
- BIOS: AMI BIOS
- System chipset: Intel® HM65

- System memory: 1 x 204-pin DDR3 1333 SO-DIMM socket, 2GB DDR3 (default), optional two sockets support up to 8GB DDR3 1333, non-ECC and un-buffered
- Hard disk drive: One 2.5" 320GB SATA HDD, removable type
- Expansion: 1 x Mini-Card Socket for Mini-PCIe and USB interface

Rear I/O

- USB: 4 x USB 2.0 port
- COM: 4 x DB-9 powered RS-232 port, adjust RI/5V/12V by BIOS setting
- Ethernet: 1 x RJ-45, 10/100/1000 Mbps
- VGA: 1 x DB-15 2nd VGA port
- Cash Drawer: 1 x RJ-11 port, support two cash drawers (24V, Max 1.1A)
- Parallel: 1 x DB-25 printer port
- Audio: 1 x Line-out jack
- DC-IN: 1 x +19VDC input, Mini-DIN 4Pin lock type
- DC-OUT: 1 x +12VDC output for 2nd display power (12V, Max 3.0A)


Ethernet

- LAN chip: Intel® PHY WG82579LM Gigabit LAN
- Ethernet interface: 10/100/1000 Based-TX Ethernet compatible

Mechanical & Environment

- Color: beige/black

Dimension Drawing

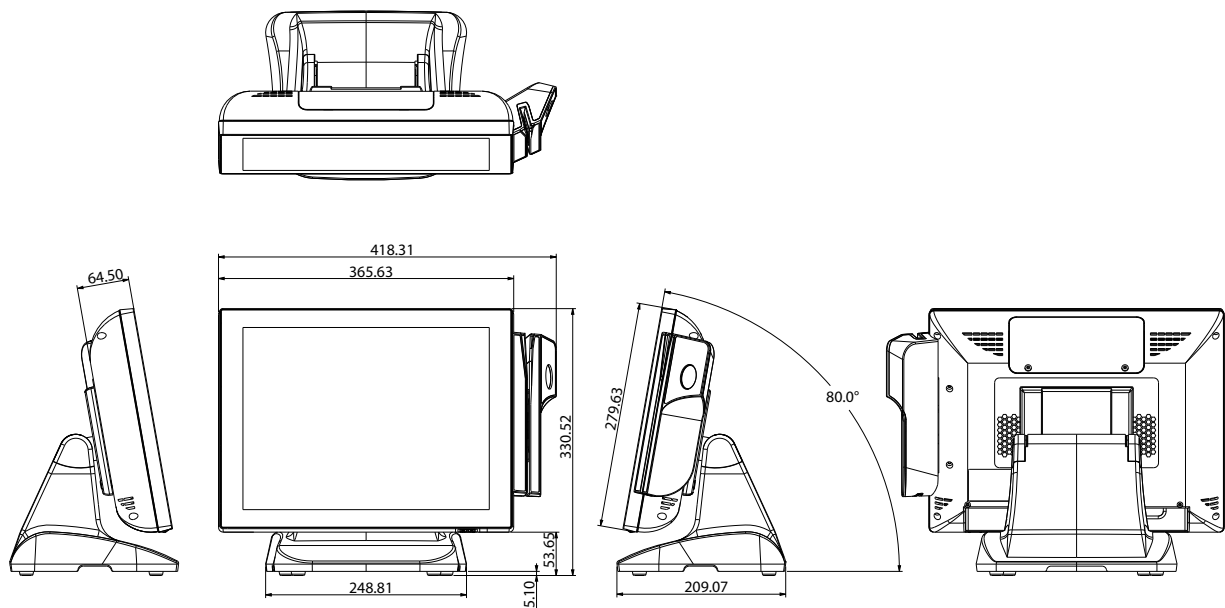

- Mounting: desktop type, optional VESA 100 x 100mm wall-mount when detaching stand
- IP protection: front bezel complies with IP-65 protection standard
- Power input: +19VDC
- Power adapter: AC to DC power brick (+19VDC/6.315A, 120W)
- Operating temperature: 0°C to 40°C
- Storage temperature: -20°C to 60°C
- Operating humidity: 20%~ 80% relative humidity, non-condensing
- Dimension: 366mm (W) x 331mm (H) x 210mm (D) (no MSR), 419mm (W) x 331mm (H) x 210mm (D) (with MSR)
- Weight: 8.5kg
- Tilt angle: 0° ~ 80°

Certifications

- CE approval
- FCC Class A

Ordering Information

◆ NPT 5852-036 (P/N: A0Y00585206X0)

- Color: Black
- CPU: Intel® Core™ i3/i5/i7 mobile processor, 2C/2T, 2.10GHz, 2MB cache
- LCD/Touch: 15" XGA 1024 x 768 250nits with LED backlight/ projected capacitive true flat touch
- Memory: 2GB DDR3 SO-DIMM
- HDD: 320GB 2.5" SATA 5,400rpm
- Power: +19VDC/120W power brick

◆ Options

- 3G module kit (P/N: BW00000023X00)
- WiFi module kit (P/N: TBD)



Main Features

- Front Bezel IP-65 Stand Compliant
- Slim and compact enclosure design
- stand accommodate Power Brick
- Zero Bezel Touch(P Cap/Resistive Option)
- Modular MSR/FingerPrint (Option)
- Optional wall-mount kit for compact space accommodation

Product Overview

The NPD 1050 is a reliable and flexibility touch monitor that can support an integrated magnetic stripe reader (MSR) and also supports an integrated 2 x 20 rear customer display. The display has touchscreen with five-wire resistive and also with projected capacitive (PCAP) for a multi-touch experience and zero-bezel. The front bezel with frame and borderless (True Flat Surface) types design combined with its Solid IP65 Water and Dust proofing.

The NPD 1050 offers a stable base touch screen and a hidden cable management system, all in an elegant and simple-to-use design. The display can function as a desktop or wall-mounted unit and includes a VESA mounting option. The 15" touch monitor provides an affordable product in a convenient, space-saving design that both first-time and experienced users can deploy more easily, reliably, and more cost-effectively. NPD-1050 is the best solution for NEXPOS box PC fanless computer.

Specifications

Panel

- 15" 4:3 XGA (1024 x 768) TFT LCD panel
- 15" 5-wire resistive touch screen
- 15" projected capacitive true flat touch screen(optional)
- Front bezel complies with IP-65 protection standard
- Option kits for MSR/Fingerprint/VFD
- Optional wall-mount kit for compact space accommodation

Rear I/O

- Touch interface port: 1 x USB2.0 Type B connector for Upstreaming; 1 x USB2.0 Type A for Downstreaming
- Video port: 1 x DB15 VGA/1 x DVI-I connector/1 x DP (Display Port)
- OSD: 1 x AUTO button for auto adjust setting; optional 4 buttons (MENU, SELECT, ▲/+, ▼/-), on optional OSD switch board
- COM: Optional: 2 x DB-9F for RS-232 Upstream
- DC-IN Jack : 1 x +12VDC Input

System Control/Indicator

- Power Switch: 1 x Power ON/OFF switch
- Power LED: 1 x Power ON LED (Green)


Mechanical & Environment

- Color: black
- Mounting: desktop type, optional VESA 100 x 100mm wall-mount when detaching stand
- IP protection: front bezel complies with IP-65 protection standard
- Power input: +12VDC
- Power adapter: Default: Power source from NPB 3550 PoweredUSB 12V; Optional: External AC DC 12V/5.0A 60W Power Brick
- Operating temperature: 0°C to 40°C
- Storage temperature: -20°C to 60°C
- Operating humidity: 20%~80% relative humidity, non-condensing
- Dimension: 368mm (W) x 331mm (H) x 210mm (D) (no MSR), 410mm (W) x 331mm (H) x 210mm (D) (with MSR)
- Weight: 6.4kg
- Tilt angle: 0° ~ 80°

Certifications

- CE approval
- FCC Class A

Dimension Drawing

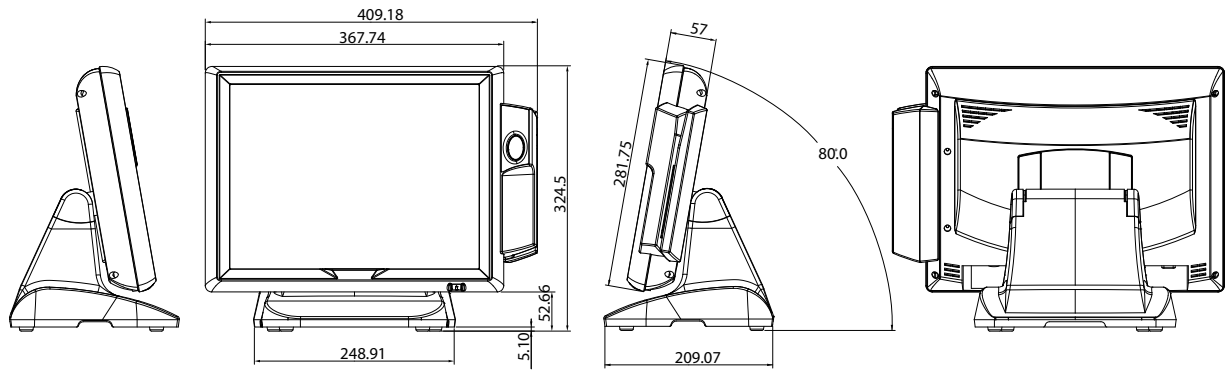

Ordering Information

- ◆ **NPD 1050-032 (P/N: A0Y20105002X0)**
 - NexPOS 15" touch display
LCD: XGA 1024 x 768 250nits
 - Touch: 15" 5-wire true flat resistive touch
 - Power: DC-12V/60W power brick
 - I/O: VGA, DVI-D, DP, USB, COM (for MSR)

OPPC 1240T

12.1" TFT SVGA 4:3 Fanless Open Frame PC with Intel Atom® E3826,
1.46GHz, Touch Screen, 4GB DDR3L, 3 x USB, 2 x COM and VGA



Main Features

- 4:3 12.1" SVGA fanless LED panel computer
- Intel Atom® E3826, dual core, low power consumption CPU
- PS2 KB/ MS/ Line-out/ dual GbE/ 3x USB
- 2 x RS232/ 422/ 485/ 2nd display-VGA/ 2 x mini-PCIe sockets/ 1 x CFast
- Remote power switch
- DDR3L 4GB/2.5" HDD bracket
- Support JMobile HMI and CODESYS SoftLogic (optional)
- Mounting support: panel/wall stand/VESA 100mm x 100mm
- Wide range power input 12~30VDC

Product Overview

Incorporated a 12.1" 4:3 touch screen LCD panel with resolutions up to 1024 x 768 (XGA) and 350 nits brightness. It is specially designed with bezel-less display which allows customers to design front bezel according to their application requirements without any limitation. The OPPC 1240T are fanless panel PC based on the Atom® E3826 processor. The OPPC 1240T supports WWAN/WLAN expansion and others via dual Gigabit Ethernet connectors, two mini-PCIe slots and one SIM card holder.

With support for wide power input of 12V~30V, OPPC 1240T can gain a strong foothold in industrial field and machine devices. In addition, OPPC 1240T can hook 2nd display via a VGA port for dual independent display. OPPC 1540T has two isolated RS232/422/485 ports.

Specifications

Panel

- LED Size: 12.1", 4:3
- Resolution: SVGA 800 x 600
- Luminance: 350cd/m²
- Contrast ratio: 800
- LCD color: 16.7M
- Viewing angle: 80(U), 80(D), 80(L), 80(R)
- Backlight: LED

Touch

- 5-wire resistive
- Light transmission: 80%
- Interface: USB

System

- CPU: On-board dual core Intel Atom® processor E3826 1.46GHz, 1M L2 Cache
- Processor: Intel® Celeron® J1900 processor, 4C, 2.0GHz, 2MB Cache (optional)
- BIOS: AMI BIOS
- System memory: 22 x 204-pin DDR3L SO-DIMM socket, 4GB DDR3L (default), support up to 8GB DDR3L-1066/ 1333, non-ECC and un-buffered
- Storage Device:
 - 1 x external locked CFast socket
 - 1 x hard drive bay: optional 1 x 2.5" SATA HDD or 1 x SATA DOM

- Watchdog timer: watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)
- H/W status monitor: Monitoring system temperature, and voltage
- Expansion: 2 x mini-PCIe sockets (support optional Wi-Fi or 3.5G module)

Rear I/O

- PS2 keyboard/mouse
- Audio port: 1x Line-out
- Remote power switch
- Ethernet: 2x RJ45
- USB: 2 x USB 2.0; 1 x USB 3.0
- COM #1: RS232/ 422/ 485
- COM #2: RS232/ 422/ 485
- Reset button
- 2nd display VGA port: 1 x DB15
- Power switch


Audio

- AC'97 codec: realtek ALC886-GR
- Audio interface: Line-out/ Line-in (optional)/ MIC-in (optional) audio Jack

Ethernet

- LAN chip: dual Intel® I210AT Gigabit LAN
- Ethernet interface: 10/100/1000 based-Tx Ethernet compatible

Dimension Drawing

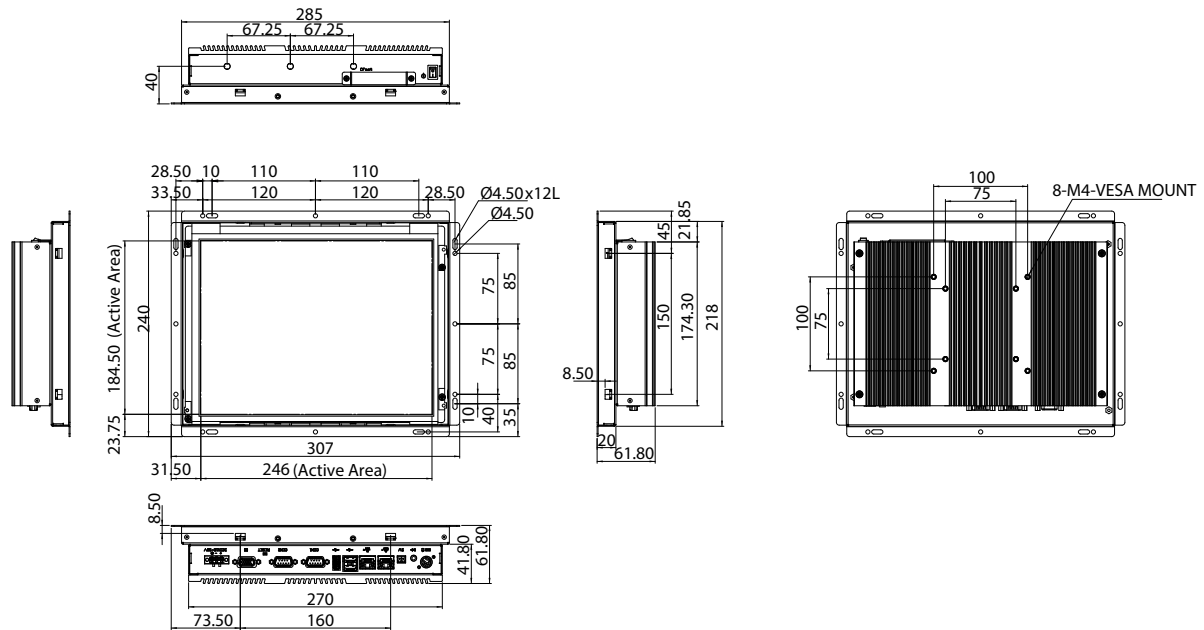

Mechanical & Environment

- Mounting:
Panel/wall/stand/VESA 100mm x 100mm
Power input: 12~30VDC
Power adapter: Optional AC to DC power adapter (+12V, 60W)
- Vibration:
IEC 68 2-64 (w/ HDD)
1Grms @ sine, 5~500Hz, 1hr/axis (HDD Operating)
2Grms @ random condition, 5~500Hz, 0.5hr/axis (Non-operating)
- Shock:
IEC 68 2-27
HDD: 20G@wall mount, half sine, 11ms
Operating temperature: -5°C to 50°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing
- Dimension: 307 x 240 x 61.8mm
- Weight: 3.8kg

Certifications

- CE approval
- FCC Class A

OS Support Lists

- Windows 8 32bit/64bit
- Windows 7 32bit/64bit
- WinCE 7.0

Ordering Information

Barebone

- **OPPC1240T (P/N: 90IQ1240T00X0)**
15" XGA LED backlight touch panel PC with Intel Atom® E3826 1.46 GHz, touch screen, 4GB DDR3L with 2 x RS232/ 422/ 485

Options

- **12V, 60W AC/DC power adapter w/o power cord (P/N: 7400060031X00)**

OPPC 1540T

15" TFT XGA 4:3 Fanless Open Frame PC with Intel® Atom™ E3826, 1.46GHz, Touch Screen, 2GB DDR3L, 3 x USB, 2 x COM and VGA



Main Features

- 4:3 15" XGA Fanless Panel Computer
- Intel® Atom™ E3826, dual core, low power consumption CPU
- PS2 KB/MS/Line-out/Dual GbE/3x USB
- 2 x RS232/422/485/2nd display-VGA/2 x Mini-PCIe sockets/1 x CFast
- Remote power switch
- DDR3L 2GB/2.5" HDD bracket
- Support JMobile HMI and CODESYS SoftLogic (optional)
- Mounting support: Panel/Wall/Stand/VESA 100mm x 100mm
- Wide range power input 12~30VDC

Product Overview

Incorporated a 15" 4:3 touch screen LCD panel with resolutions up to 1024 x 768 (XGA) and 420 nits brightness. It is specially designed with bezel-less display which allows customers to design front bezel according to their application requirements without any limitation. The OPPC1540T are fanless Panel PC based on the Atom™ E3826 processor. The OPPC 1540T supports WWAN/WLAN expansion and others via dual Gigabit Ethernet connectors, two Mini-PCIe slots and one SIM card holder.

With support for wide power input of 12~30VDC, OPPC 1540T can gain a strong foothold in industrial field and machine devices. In addition, OPPC 1540T can hook 2nd display via a VGA port for dual independent display. OPPC 1540T has two isolated RS232/422/485 ports.

Specifications

Panel

- LED size: 15", 4:3
- Resolution: XGA 1024x768
- Luminance: 420cd/m²
- Contrast ratio: 800
- LCD color: 262K
- Viewing angle: 80(U), 80(D), 80(L), 80(R)
- Backlight: LED

Touch

- 5-wire resistive
- Touch light transmission: 81%
- Touch interface: USB

System

- CPU: On-board Intel® Atom™ Dual Core processor E3826, 1.46GHz, 1M L2 Cache
- BIOS: AMI BIOS
- System memory: 2 x 204-pin DDR3L SO-DIMM socket, 2GB DDR3L (Default), Support up to 8GB DDR3L-1066/1333, Non-ECC and Un-buffered
- Storage device:
 - 1 x external locked CFast socket
 - 1 x hard drive bay: optional 1 x 2.5" SATA HDD or 1x SATA DOM
- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255

- minutes (tolerance 15% under room temperature 25°C)
- H/W status monitor: monitoring system temperature, and voltage
- Expansion: 2 x Mini-PCIe sockets (support optional Wi-Fi, 3.5G module)

Rear I/O

- PS2 keyboard/mouse
- Audio port: 1 x Line-out
- Remote power switch
- Ethernet: 2 x RJ45
- USB: 2 x USB2.0; 1 x USB3.0
- COM #1: RS232/422/485
- COM #2: RS232/422/485
- Reset button
- 2nd display VGA port: 1 x DB15
- Power switch

Audio

- HD Codec: Realtek ALC886-GR
- Audio interface: Line-out/Line-in (Optional)/MIC-in (Optional) audio Jack


Ethernet

- LAN chip: dual Intel® I210AT Gigabit LAN
- Ethernet interface: 10/100/1000 Based-Tx Ethernet compatible

Mechanical & Environment

- Mounting: panel/wall/stand/VESA 100mm x 100mm
- Power input: 12~30VDC

Dimension Drawing

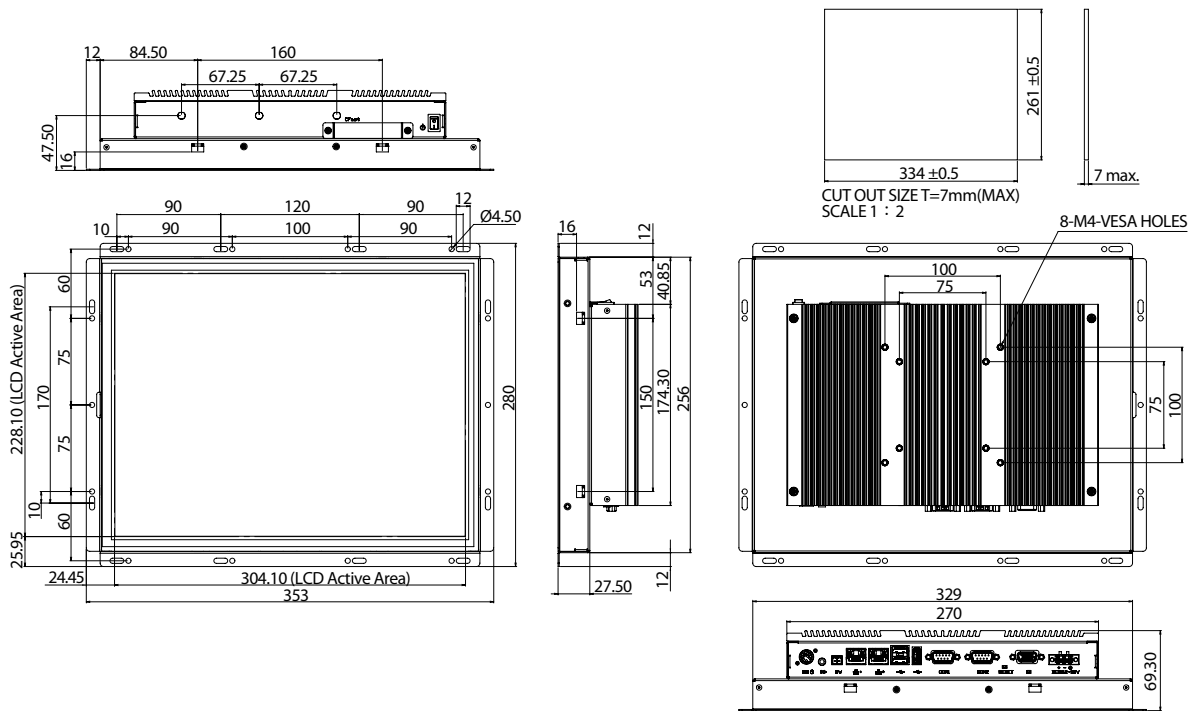

- Power adapter: Optional AC to DC power adapter (+12V, 60W)
- Vibration:
 - IEC 68 2-64 (w/ HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
 - 2Grms @ sine, 5~500Hz, 1hr/axis (CFast operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G@wall mount, half sine, 11ms
- Operating temperature: -5°C to 50°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing
- Dimension: 329 x 280 x 69.3mm
- Weight: 4Kg

Certifications

- CE approval
- FCC Class A

OS Support Lists

- Windows 8 32bit/64bit
- Windows 7 32bit/64bit
- WinCE 7.0

Ordering Information

Barebone

- **OPPC 1540T (P/N: 90IQ1540T00X0)**
15" XGA LED backlight touch Panel PC with Intel® Atom™ E3826 1.46 GHz, touch screen, 2GB DDR3L with 2x RS232/422/485

Options

- **12V, 60W AC/DC power adapter w/o power cord (P/N: 7400060017X00)**

OPPC 1540T-J1900

15" TFT XGA 4:3 Fanless Open Frame PC with Intel® Celeron™ J1900, 2.0GHz, Touch Screen, 2GB DDR3L, 3 x USB, 2 x COM and VGA



Main Features

- 4:3 15" XGA Fanless Panel Computer
- Intel® Celeron™ J1900, Quad core, low power consumption CPU
- PS2 KB/ MS/ Line-out/ Dual GbE/ 3x USB
- 2 x RS232/ 422/ 485/ 2nd display-VGA/ 2 x Mini-PCIe sockets/ 1 x CFast
- Remote power switch
- DDR3L 2GB/ 2.5" HDD bracket
- Support JMobile HMI and CODESYS SoftLogic (optional)
- Mounting support: Panel/ Wall/ Stand/ VESA 100mm x 100mm
- Wide range power input 12~30VDC

Product Overview

Incorporated a 15" 4:3 touch screen LCD panel with resolutions up to 1024 x 768 (XGA) and 420 nits brightness. It is specially designed with bezel-less display which allows customers to design front bezel according to their application requirements without any limitation. The OPPC 1540T-J1900 are fanless Panel PC based on the Celeron™ J1900 processor. The OPPC 1540T-J1900 supports WWAN/WLAN expansion and others via dual Gigabit Ethernet connectors, two Mini-PCIe slots and one SIM card holder.

With support for wide power input of 12~30VDC, OPPC 1540T-J1900 can gain a strong foothold in industrial field and machine devices. In addition, OPPC 1540T-J1900 can hook 2nd display via a VGA port for dual independent display. OPPC 1540T-J1900 has two isolated RS232/ 422/ 485 ports.

Specifications

Panel

- LED size: 15", 4:3
- Resolution: XGA 1024x768
- Luminance: 420cd/m²
- Contrast ratio: 800
- LCD color: 262K
- Viewing angle: 80(U), 80(D), 80(L), 80(R)
- Backlight: LED

Touch

- 5-wire resistive
- Touch light transmission: 81%
- Touch interface: USB

System

- CPU: On-board Intel® Celeron™, Quad core processor J1900, 2.0GHz, 2M L2 Cache
- BIOS: AMI BIOS
- System memory: 2 x 204-pin DDR3L SO-DIMM socket, 2GB DDR3L (Default), Support up to 8GB DDR3L-1066/1333, Non-ECC and Un-buffered
- Storage device:
 - 1 x external locked CFast socket
 - 1 x hard drive bay: optional 1 x 2.5" SATA HDD or 1x SATA DOM
- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255

minutes (tolerance 15% under room temperature 25°C)

- H/W status monitor: monitoring system temperature, and voltage
- Expansion: 2 x Mini-PCIe sockets (support optional Wi-Fi, 3.5G module)

Rear I/O

- PS2 keyboard/mouse
- Audio port: 1 x Line-out
- Remote power switch
- Ethernet: 2 x RJ45
- USB: 2 x USB2.0; 1 x USB3.0
- COM #1: RS232/ 422/ 485
- COM #2: RS232/ 422/ 485
- Reset button
- 2nd display VGA port: 1 x DB15
- Power switch

Audio

- HD Codec: Realtek ALC886-GR
- Audio interface: Line-out/ Line-in (Optional)/ MIC-in (Optional) audio Jack


Ethernet

- LAN chip: dual Intel® I210AT Gigabit LAN
- Ethernet interface: 10/100/1000 Based-Tx Ethernet compatible

Mechanical & Environment

- Mounting: panel/ wall/ stand/ VESA 100mm x 100mm
- Power input: 12~30VDC

Dimension Drawing

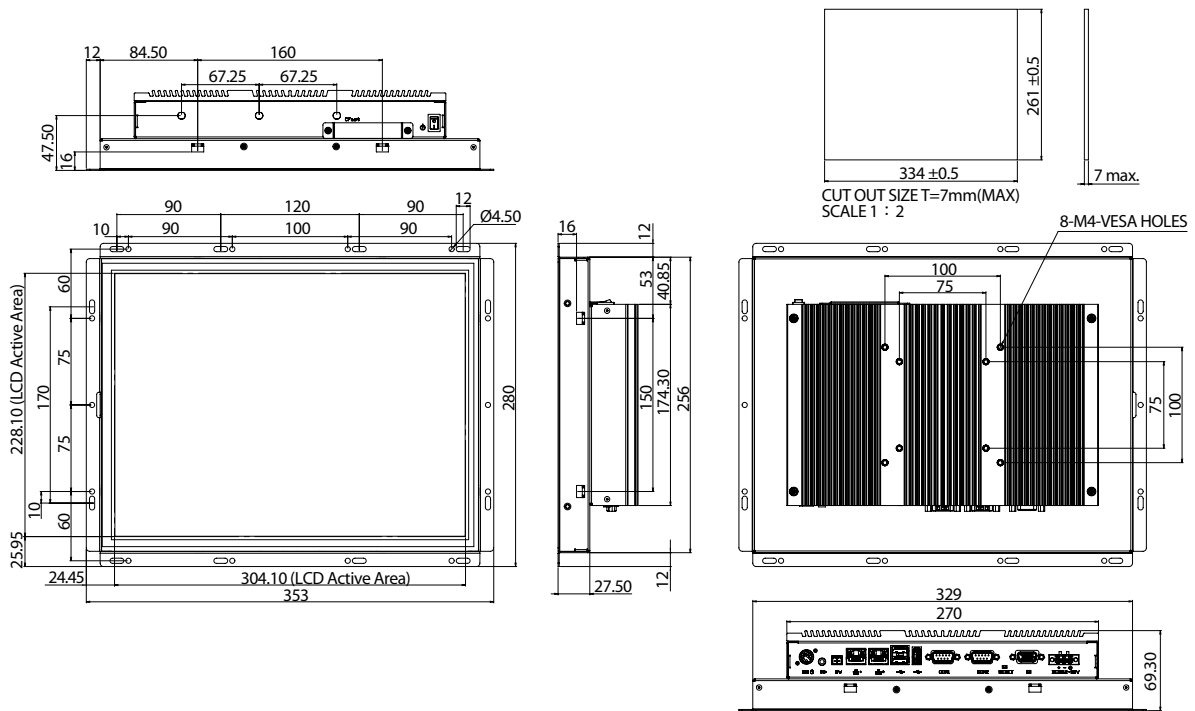

- Power adapter: Optional AC to DC power adapter (+12V, 60W)
- Vibration:
 - IEC 68 2-64 (w/ HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/ axis (HDD operating)
 - 2Grms @ sine, 5~500Hz, 1hr/ axis (CFast operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G@wall mount, half sine, 11ms
- Operating temperature: -5°C to 50°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing
- Dimension: 329 x 280 x 69.3mm
- Weight: 4Kg

Certifications

- CE approval
- FCC Class A

OS Support Lists

- Windows 8 32bit/64bit
- Windows 7 32bit/64bit
- WinCE 7.0

Ordering Information

Barebone

- **OPPC 1540T-J1900 (P/N: 90IQ1540T02X0)**
15" TFT XGA 4:3 Fanless Open Frame PC with Intel® Celeron™ J1900, 2.0GHz, Touch Screen, 2GB DDR3L, 3 x USB, 2 x COM and VGA

Options

- **12V, 60W AC/DC power adapter w/o power cord (P/N: 7400060017X00)**

OPPC 1740T

17" TFT SXGA 4:3 Fanless Open Frame PC with Intel Atom® E3826, 1.46GHz,
Touch Screen, 4GB DDR3L, 3x USB, 2 x COM and VGA



Main Features

- 4:3 17" XGA fanless LED panel computer
- Intel Atom® E3826, dual core, low power consumption CPU
- PS2 KB/ MS/ Line-out/ dual GbE/ 3 x USB
- 2 x RS232/ 422/ 485/ 2nd display-VGA/ 2 x mini-PCIe sockets/ 1 x CFast
- Remote power switch
- DDR3L 4GB/ 2.5" HDD bracket
- Support JMobile HMI and CODESYS SoftLogic (optional)
- Mounting support: panel/ wall/ stand/ VESA 100mm x 100mm
- Wide range power input 12~30VDC

Product Overview

Incorporated a 17" 4:3 touch screen LCD panel with resolutions up to 1024 x 768 (XGA) and 420 nits brightness. It is specially designed with bezel-less display which allows customers to design front bezel according to their application requirements without any limitation. The OPPC 1740T are fanless Panel PC based on the Atom® E3826 processor. The OPPC 1740T supports WWAN/WLAN expansion and others via dual Gigabit Ethernet connectors, two Mini-PCIe slots and one SIM card holder.

With support for wide power input of 12V~30V, OPPC 1740T can gain a strong foothold in industrial field and machine devices. In addition, OPPC 1740T can hook 2nd display via a VGA port for dual independent display. OPPC 1540T has two isolated RS232/422/485 ports.

Specifications

Panel

- LED Size: 17", 4:3
- Resolution: SXGA 1280 x 1024
- Luminance: 350cd/m²
- Contrast ratio: 1000
- LCD color: 16.7M
- Viewing angle: 80(U), 80(D), 85(L), 85(R)
- Backlight: LED

Touch

- 5-wire resistive
- Light transmission: 80%
- Interface: USB

System

- CPU: On-board dual core Intel Atom® processor E3826 1.46GHz, 1M L2 Cache
- Processor: Intel® Celeron® J1900 processor, 4C, 2.0GHz, 2MB Cache (optional)
- BIOS: AMI BIOS
- System memory: 2 x 204-pin DDR3L SO-DIMM socket, 4GB DDR3L (default), support up to 8GB DDR3L-1066/1333, non-ECC and un-buffered
- Storage Device:
 - 1 x external locked CFast socket

- 1 x hard drive bay: optional 1 x 2.5" SATA HDD or 1 x SATA DOM
- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)
- H/W status monitor: Monitoring system temperature, and voltage
- Expansion: 2 x mini-PCIe sockets (support optional Wi-Fi or 3.5G module)


Rear I/O

- PS2 keyboard/mouse
- Audio port: 1x Line-out
- Remote power switch
- Ethernet: 2x RJ45
- USB: 2 x USB 2.0; 1 x USB 3.0
- COM #1: RS232/422/485
- COM #2: RS232/422/485
- Reset button
- 2nd display VGA port: 1 x DB15
- Power switch

Audio

- AC'97 codec: Realtek ALC886-GR
- Audio interface: Line-out/Line-in (optional)/MIC-in (optional) audio Jack

Dimension Drawing

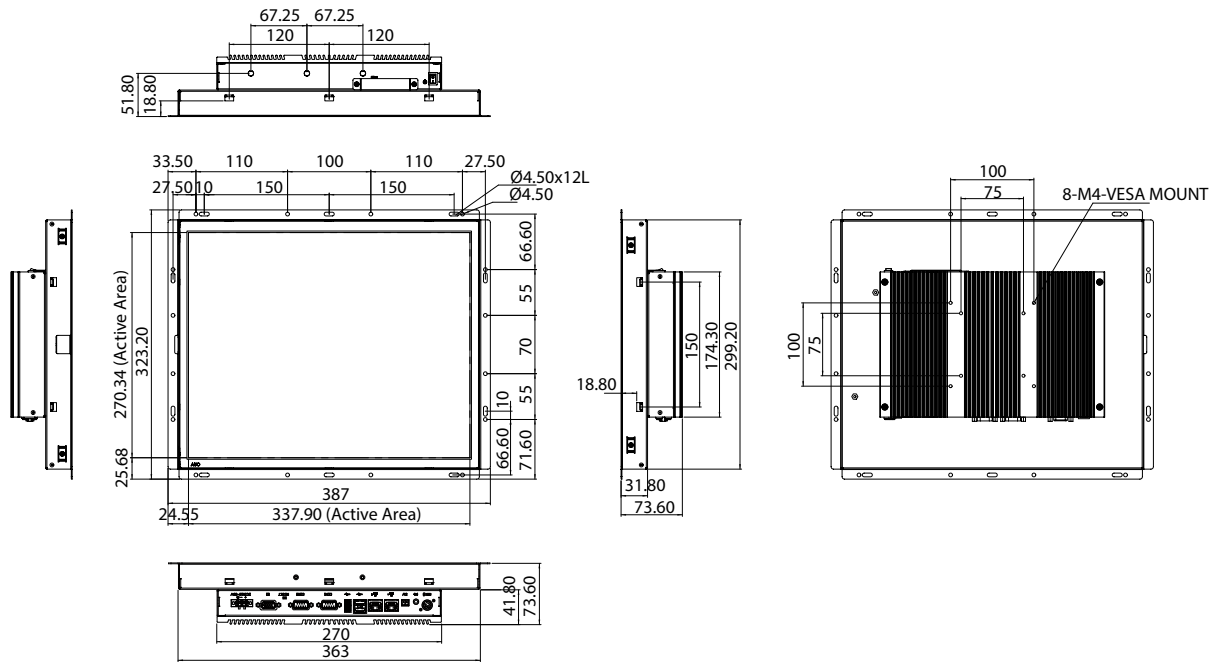

Ethernet

- LAN chip: dual Intel® I210AT Gigabit LAN
- Ethernet interface: 10/100/1000 Based-Tx Ethernet compatible

Mechanical & Environment

- Mounting: Panel/wall/stand/VESA 100mm x 100mm
- Power input: 12~30VDC
- Power adapter: Optional AC to DC power adapter (+12V, 60W)
- Vibration:
 - IEC 68 2-64 (w/ HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD Operating)
 - 2Grms @ random condition, 5~500Hz, 0.5hr/axis (Non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G@wall mount, half sine, 11ms
- Operating temperature: -5°C to 50°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing
- Dimension: 387 x 323.2 x 73.6mm
- Weight: 5.6 kg

Certifications

- CE approval
- FCC Class A

OS Support Lists

- Windows 8 32bit/64bit
- Windows 7 32bit/64bit
- WinCE 7.0

Ordering Information

Barebone

- **OPPC 1740T (P/N: 90IQ1740T00X0)**
17" XGA LED backlight touch panel PC with Intel Atom® E3826 1.46 GHz, touch screen, 4GB DDR3L with 2 x RS232/ 422/ 485

Options

- **12V, 60W AC/DC power adapter w/o power cord (P/N: 7400060031X00)**

OPPC 1940T

19" TFT SXGA 4:3 Fanless Open Frame PC with Intel® Atom™ E3826, 1.46GHz, Touch Screen, 2GB DDR3L, 3 x USB, 2 x COM and VGA



Main Features

- 4:3 19" SXGA Fanless Panel Computer
- Intel® Atom™ E3826, dual core, low power consumption CPU
- PS2 KB/MS/Line-out/Dual GbE/3x USB
- 2 x RS232/422/485/2nd display-VGA/2 x Mini-PCIe sockets/1 x CFast
- Remote power switch
- DDR3L 2GB/2.5" HDD bracket
- Support JMobile HMI and CODESYS SoftLogic (optional)
- Mounting support: Panel/Wall/Stand/VESA 100mm x 100mm
- Wide range power input 12~30VDC

Product Overview

Incorporated a 19" 4:3 touch screen LCD panel with resolutions up to 1280 x 1024 (SXGA) and 350 nits brightness. It is specially designed with bezel-less display which allows customers to design front bezel according to their application requirements without any limitation. The OPPC1940T are fanless Panel PC based on the Atom™ E3826 processor. The OPPC 1940T supports WWAN/WLAN expansion and others via dual Gigabit Ethernet connectors, two Mini-PCIe slots and one SIM card holder.

With support for wide power input of 12~30VDC, OPPC 1940T can gain a strong foothold in industrial field and machine devices. In addition, OPPC 1940T can hook 2nd display via a VGA port for dual independent display. OPPC 1940T has two isolated RS232/422/485 ports.

Specifications

Panel

- LED size: 19", 4:3
- Resolution: SXGA 1280x1024
- Luminance: 350cd/m²
- Contrast ratio: 1000:1
- LCD color: 16.7M
- Viewing angle: 80(U), 80(D), 85(L), 85(R)
- Backlight: LED

Touch

- 5-wire resistive
- Touch light transmission: 80%
- Touch interface: USB

System

- CPU: On-board Intel® Atom™ Dual Core processor E3826, 1.46GHz, 1M L2 Cache
- BIOS: AMI BIOS
- System memory: 2 x 204-pin DDR3L SO-DIMM socket, 2GB DDR3L (Default), Support up to 8GB(4GB+4GB) DDR3L-1066/1333, Non-ECC and Un-buffered
- Storage device:
 - 1 x external locked CFast socket
 - 1 x hard drive bay: optional 1 x 2.5" SATA HDD or 1 x SATA DOM
- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255

minutes (tolerance 15% under room temperature 25°C)

- H/W status monitor: monitoring system temperature, and voltage
- Expansion: 2 x Mini-PCIe sockets (support optional Wi-Fi, 3.5G module)

Rear I/O

- PS2 keyboard/mouse
- Audio port: 1 x Line-out
- Remote power switch
- Ethernet: 2 x RJ45
- USB: 2 x USB2.0; 1 x USB3.0
- COM #1: RS232/422/485
- COM #2: RS232/422/485
- Reset button
- 2nd display VGA port: 1 x DB15
- Power switch

Audio

- HD Codec: Realtek ALC886-GR
- Audio interface: Line-out/Line-in (Optional)/MIC-in (Optional) audio Jack


Ethernet

- LAN chip: dual Intel® I210AT Gigabit LAN
- Ethernet interface: 10/100/1000 Based-Tx Ethernet compatible

Mechanical & Environment

- Mounting: panel/wall/stand/VESA 100mm x 100mm

Dimension Drawing

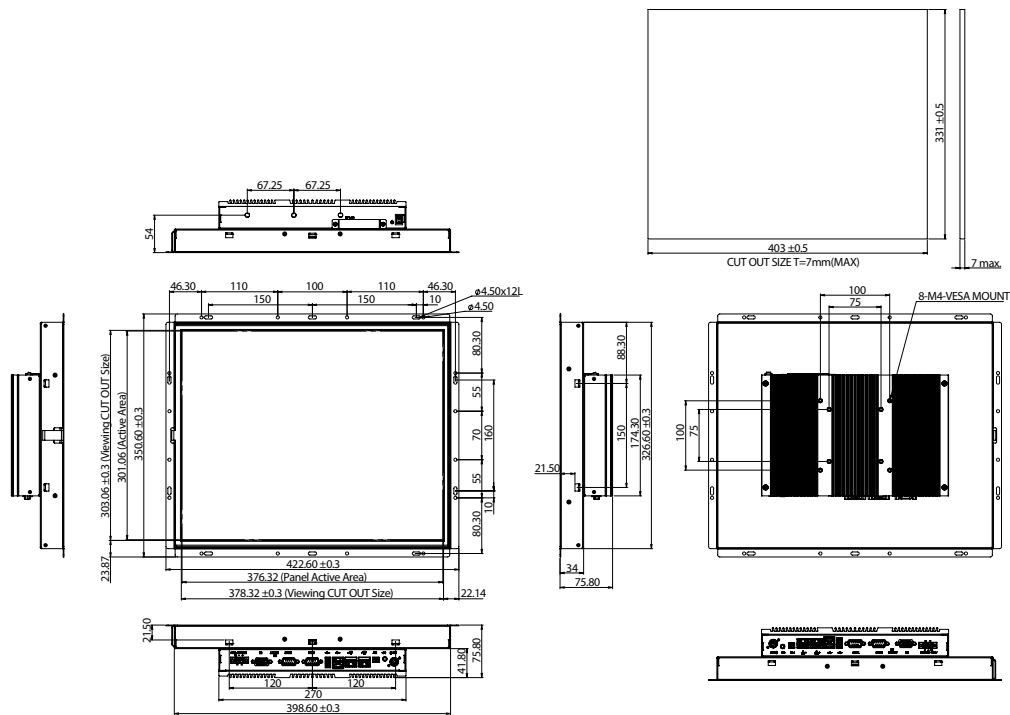

- Power input: 12~30VDC
- Power adapter: Optional AC to DC power adapter (+12V, 60W)
- Vibration:
 - IEC 68 2-64 (w/ HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
 - 2Grms @ sine, 5~500Hz, 1hr/axis (CFast operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G@wall mount, half sine, 11ms
- Operating temperature: -5°C to 50°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing
- Dimension: 422.6(W) x 350.6(H) x 73.2(D)mm
- Weight: 6.15Kg

Certifications

- CE approval
- FCC Class A

OS Support Lists

- Windows 8 32bit/64bit
- Windows 7 32bit/64bit
- WinCE 7.0

Ordering Information

Barebone

- **OPPC 1940T (P/N: 90IQ1940T00X0)**
19" S XGA LED backlight touch Panel PC with Intel® Atom™ E3826 1.46 GHz, touch screen, 2GB DDR3L with 2x RS232/422/485

Options

- **12V, 60W AC/DC power adapter w/o power cord (P/N: 7400060017X00)**

OPPC 1940T-J1900

19" TFT SXGA 4:3 Fanless Open Frame PC with Intel® Celeron™ J1900, 2.0GHz, touch Screen, 2GB DDR3L, 3 x USB, 2 x COM and VGA



Main Features

- 4:3 19" SXGA Fanless Panel Computer
- Intel® Celeron™ J1900, Quad core, low power consumption CPU
- PS2 KB/ MS/ Line-out/ Dual GbE/ 3x USB
- 2 x RS232/ 422/ 485/ 2nd display-VGA/ 2 x Mini-PCIe sockets/ 1 x CFast
- Remote power switch
- DDR3L 2GB/2.5" HDD bracket
- Support JMobile HMI and CODESYS SoftLogic (optional)
- Mounting support: Panel/ Wall/ Stand/ VESA 100mm x 100mm
- Wide range power input 12~30VDC

Product Overview

Incorporated a 19" 4:3 touch screen LCD panel with resolutions up to 1280 x 1024 (SXGA) and 350 nits brightness. It is specially designed with bezel-less display which allows customers to design front bezel according to their application requirements without any limitation. The OPPC 1940T-J1900 are fanless Panel PC based on the Celeron™ J1900 processor. The OPPC 1940T-J1900 supports WWAN/WLAN expansion and others via dual Gigabit Ethernet connectors, two Mini-PCIe slots and one SIM card holder.

With support for wide power input of 12~30VDC, OPPC 1940T-J1900 can gain a strong foothold in industrial field and machine devices. In addition, OPPC 1940T-J1900 can hook 2nd display via a VGA port for dual independent display. OPPC 1940T-J1900 has two isolated RS232/ 422/ 485 ports.

Specifications

Panel

- LED size: 19", 4:3
- Resolution: SXGA 1280x1024
- Luminance: 350cd/m²
- Contrast ratio: 1000:1
- LCD color: 16.7M
- Viewing angle: 80(U), 80(D), 85(L), 85(R)
- Backlight: LED

Touch

- 5-wire resistive
- Touch light transmission: 80%
- Touch interface: USB

System

- CPU: On-board Intel® Celeron™, Quad core processor J1900, 2.0GHz, 2M L2 Cache
- BIOS: AMI BIOS
- System memory: 2 x 204-pin DDR3L SO-DIMM socket, 2GB DDR3L (Default), Support up to 8GB(4GB+4GB) DDR3L-1066/ 1333, Non-ECC and Un-buffered
- Storage device:
 - 1 x external locked CFast socket
 - 1 x hard drive bay: optional 1 x 2.5" SATA HDD or 1 x SATA DOM
- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255

- minutes (tolerance 15% under room temperature 25°C)
- H/W status monitor: monitoring system temperature, and voltage
- Expansion: 2 x Mini-PCIe sockets (support optional Wi-Fi, 3.5G module)

Rear I/O

- PS2 keyboard/ mouse
- Audio port: 1 x Line-out
- Remote power switch
- Ethernet: 2 x RJ45
- USB: 2 x USB2.0; 1 x USB3.0
- COM #1: RS232/ 422/ 485
- COM #2: RS232/ 422/ 485
- Reset button
- 2nd display VGA port: 1 x DB15
- Power switch

Audio

- HD Codec: Realtek ALC886-GR
- Audio interface: Line-out/ Line-in (Optional)/ MIC-in (Optional) audio Jack


Ethernet

- LAN chip: dual Intel® I210AT Gigabit LAN
- Ethernet interface: 10/100/1000 Based-Tx Ethernet compatible

Mechanical & Environment

- Mounting: panel/ wall/ stand/ VESA 100mm x 100mm

Dimension Drawing

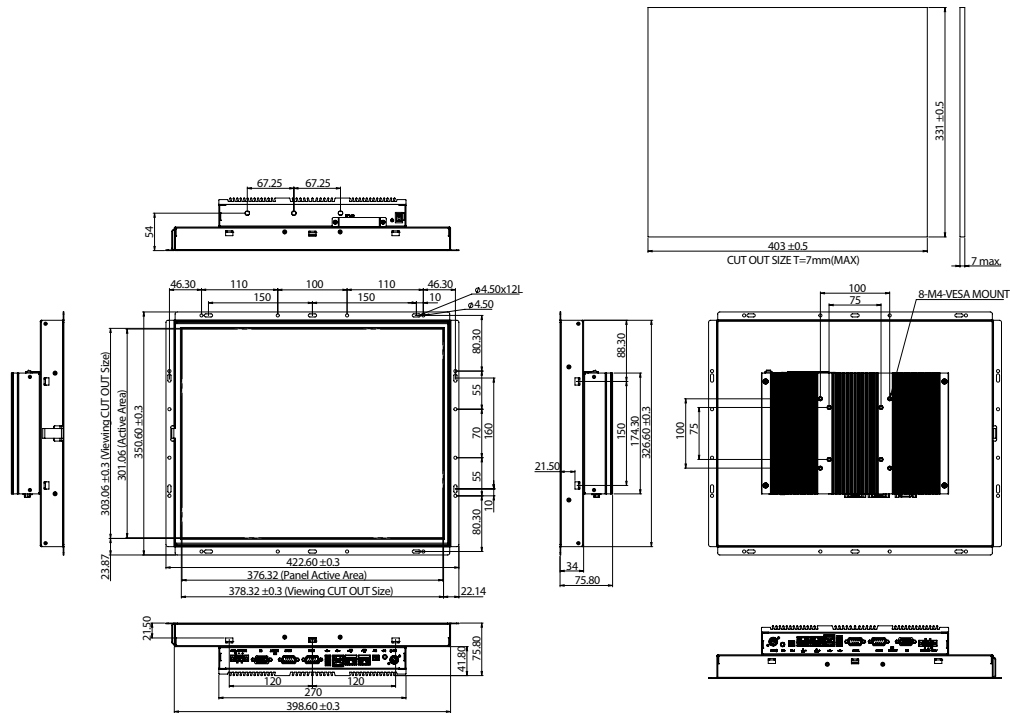

- Power input: 12~30VDC
- Power adapter: Optional AC to DC power adapter (+12V, 60W)
- Vibration:
 - IEC 68 2-64 (w/ HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
 - 2Grms @ sine, 5~500Hz, 1hr/axis (CFast operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G@wall mount, half sine, 11ms
- Operating temperature: -5°C to 50°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing
- Dimension: 422.6(W) x 350.6(H) x 73.2(D)mm
- Weight: 6.15Kg

Certifications

- CE approval
- FCC Class A

OS Support Lists

- Windows 8 32bit/ 64bit
- Windows 7 32bit/ 64bit
- WinCE 7.0

Ordering Information

Barebone

- **OPPC1940T-J1900 (P/N: 90IQ1940T01X0)**
19" S XGA LED backlight touch Panel PC with Intel® Celeron™ J1900, 2.0GHz, touch screen, 2GB DDR3L with 2x RS232/ 422/ 485

Options

- **12V, 60W AC/DC power adapter w/o power cord (P/N: 7400060017X00)**

OPPC 1540HT-J1900

15" TFT XGA 4:3 Fanless Open Frame PC with
Intel® Celeron™ J1900, 2.0GHz, 1000 nits



Main Features

- 4:3 15" XGA Fanless Panel Computer
- Intel® Celeron™ J1900, Quad core, low power consumption CPU
- 1000 nits High brightness
- PS2 KB/MS/Line-out/Dual GbE/3x USB
- 2 x RS232/422/485/2nd display-VGA/2 x Mini-PCIe sockets/1 x CFast
- Remote power switch
- DDR3L 2GB/2.5" HDD bracket
- Support JMobile HMI and CODESYS SoftLogic (optional)
- Mounting support: Panel/Wall/Stand/VESA 100mm x 100mm
- Wide range power input 12~30VDC

Product Overview

Incorporated a 15" 4:3 touch screen LCD panel with resolutions up to 1024 x 768 (XGA) and 1000 nits high brightness. It is specially designed with bezel-less display which allows customers to design front bezel according to their application requirements without any limitation. The OPPC 1540HT-J1900 are fanless Panel PC based on the Celeron™ J1900 processor. The OPPC 1540HT-J1900 supports WWAN/WLAN expansion and others via dual Gigabit Ethernet connectors, two Mini-PCIe slots and one SIM card holder.

With support for wide power input of 12~30VDC, OPPC 1540HT-J1900 can gain a strong foothold in industrial field and machine devices. In addition, OPPC 1540HT-J1900 can hook 2nd display via a VGA port for dual independent display. OPPC 1540HT-J1900 has two isolated RS232/422/485 ports.

Specifications

Panel

- LED size: 15", 4:3
- Resolution: XGA 1024x768
- Luminance: 1000 cd/m²
- Contrast ratio: 2500
- LCD color: 16.2M
- Viewing angle: 88(U), 88(D), 88(L), 88(R)
- Backlight: LED

Touch

- 5-wire resistive
- Touch light transmission: 81%
- Touch interface: USB

System

- CPU: On-board Intel® Celeron™, Quad core processor J1900, 2.0GHz, 2M L2 Cache
- BIOS: AMI BIOS
- System memory: 2 x 204-pin DDR3L SO-DIMM socket, 2GB DDR3L (Default), Support up to 8GB DDR3L-1066/1333, Non-ECC and Un-buffered
- Storage device:
 - 1 x external locked CFast socket
 - 1 x hard drive bay: optional 1 x 2.5" SATA HDD or 1x SATA DOM
- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255

minutes (tolerance 15% under room temperature 25°C)

- H/W status monitor: monitoring system temperature, and voltage
- Expansion: 2 x Mini-PCIe sockets (support optional Wi-Fi, 3.5G module)

Rear I/O

- PS2 keyboard/mouse
- Audio port: 1 x Line-out
- Remote power switch
- Ethernet: 2 x RJ45
- USB: 2 x USB2.0; 1 x USB3.0
- COM #1: RS232/422/485
- COM #2: RS232/422/485
- Reset button
- 2nd display VGA port: 1 x DB15
- Power switch

Audio

- HD Codec: Realtek ALC886-GR
- Audio interface: Line-out/Line-in (Optional)/MIC-in (Optional) audio Jack


Ethernet

- LAN chip: dual Intel® I210AT Gigabit LAN
- Ethernet interface: 10/100/1000 Based-Tx Ethernet compatible

Mechanical & Environment

- Mounting: panel/wall/stand/VESA 100mm x 100mm
- Power input: 12~30VDC

Dimension Drawing

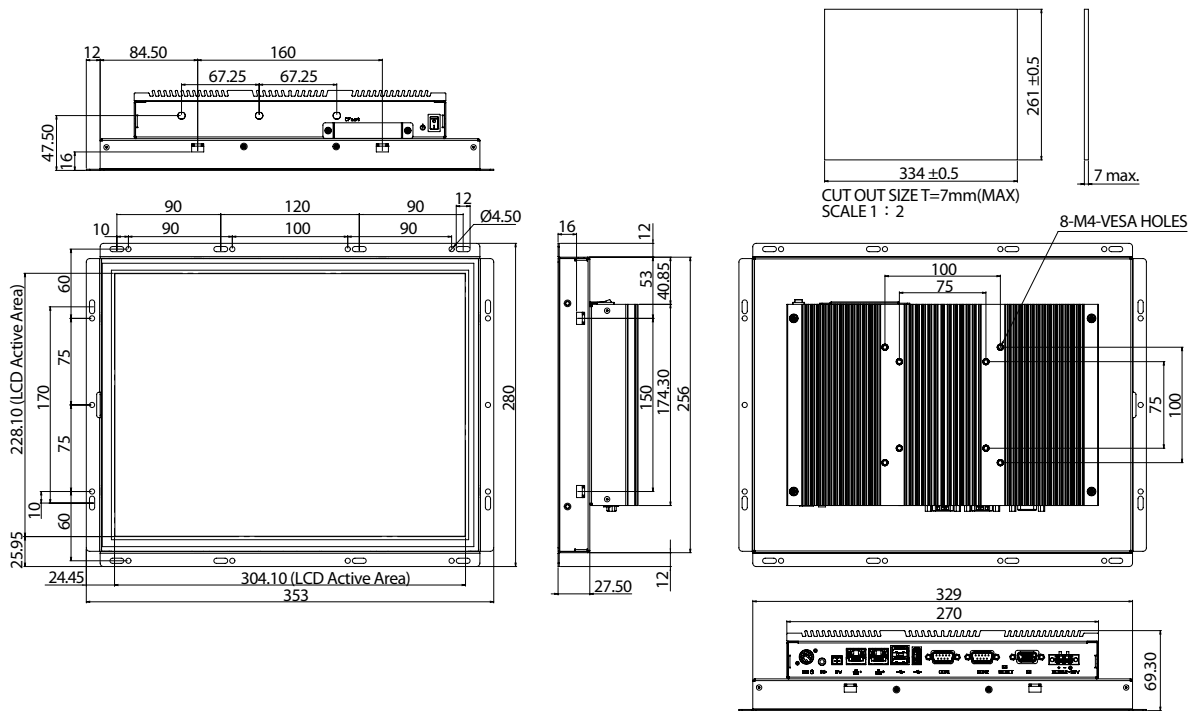

- Power adapter: Optional AC to DC power adapter (+12V, 60W)
- Vibration:
 - IEC 68 2-64 (w/ HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
 - 2Grms @ sine, 5~500Hz, 1hr/axis (CFast operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G@wall mount, half sine, 11ms
- Operating temperature: -5°C to 50°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing
- Dimension: 329 x 280 x 69.3mm
- Weight: 4Kg

Certifications

- CE approval
- FCC Class A

OS Support Lists

- Windows 8 32bit/64bit
- Windows 7 32bit/64bit
- WinCE 7.0

Ordering Information

Barebone

• OPPC 1540HT-J1900 (P/N: TBD)

15" XGA LED backlight touch Panel PC with Intel® Celeron™ J1900, 2.0GHz, 1000 nits, touch screen, 2GB DDR3L with 2x RS232/422/485

Options

- 12V, 60W AC/DC power adapter w/o power cord
(P/N: 7400060017X00)

OPPC 1940HT-J1900

19" TFT SXGA 4:3 Fanless Open Frame PC with
Intel® Celeron™ J1900, 2.0GHz, 1000 nits



Main Features

- 4:3 19" SXGA Fanless Panel Computer
- Intel® Celeron™ J1900, Quad core, low power consumption CPU
- 1000 nits High brightness
- PS2 KB/MS/Line-out/Dual GbE/3x USB
- 2 x RS232/422/485/2nd display-VGA/2 x Mini-PCIe sockets/1 x CFast
- Remote power switch
- DDR3L 2GB/2.5" HDD bracket
- Support JMobile HMI and CODESYS SoftLogic (optional)
- Mounting support: Panel/Wall/Stand/VESA 100mm x 100mm
- Wide range power input 12~30VDC

Product Overview

Incorporated a 19" 4:3 touch screen LCD panel with resolutions up to 1280 x 1024 (SXGA) and 1000 nits high brightness. It is specially designed with bezel-less display which allows customers to design front bezel according to their application requirements without any limitation. The OPPC 1940HT-J1900 are fanless Panel PC based on the Celeron™ J1900 processor. The OPPC 1940HT-J1900 supports WWAN/WLAN expansion and others via dual Gigabit Ethernet connectors, two Mini-PCIe slots and one SIM card holder.

With support for wide power input of 12~30VDC, OPPC 1940HT-J1900 can gain a strong foothold in industrial field and machine devices. In addition, OPPC 1940HT-J1900 can hook 2nd display via a VGA port for dual independent display. OPPC 1940HT-J1900 has two isolated RS232/422/485 ports.

Specifications

Panel

- LED size: 19", 4:3
- Resolution: SXGA 1280x1024
- Luminance: 1000 cd/m²
- Contrast ratio: 1000:1
- LCD color: 16.7M
- Viewing angle: 80(U), 80(D), 85(L), 85(R)
- Backlight: LED

Touch

- 5-wire resistive
- Touch light transmission: 80%
- Touch interface: USB

System

- CPU: On-board Intel® Celeron™, Quad core processor J1900, 2.0GHz, 2M L2 Cache
- BIOS: AMI BIOS
- System memory: 2 x 204-pin DDR3L SO-DIMM socket, 2GB DDR3L (Default), Support up to 8GB(4GB+4GB) DDR3L-1066/1333, Non-ECC and Un-buffered
- Storage device:
 - 1 x external locked CFast socket
 - 1 x hard drive bay: optional 1 x 2.5" SATA HDD or 1 x SATA DOM
- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)

- H/W status monitor: monitoring system temperature, and voltage
- Expansion: 2 x Mini-PCIe sockets (support optional Wi-Fi, 3.5G module)

Rear I/O

- PS2 keyboard/mouse
- Audio port: 1 x Line-out
- Remote power switch
- Ethernet: 2 x RJ45
- USB: 2 x USB2.0; 1 x USB3.0
- COM #1: RS232/422/485
- COM #2: RS232/422/485
- Reset button
- 2nd display VGA port: 1 x DB15
- Power switch

Audio

- HD Codec: Realtek ALC886-GR
- Audio interface: Line-out/Line-in (Optional)/MIC-in (Optional) audio Jack


Ethernet

- LAN chip: dual Intel® I210AT Gigabit LAN
- Ethernet interface: 10/100/1000 Based-Tx Ethernet compatible

Mechanical & Environment

- Mounting: panel/wall/stand/VESA 100mm x 100mm
- Power input: 12~30VDC

Dimension Drawing

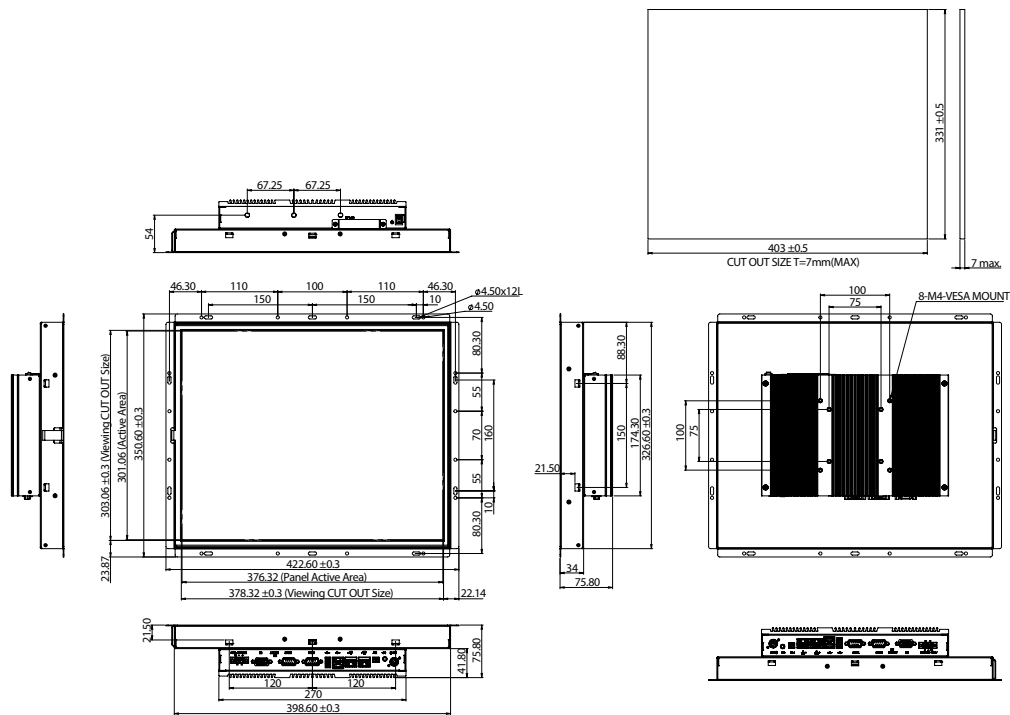

- Power adapter: Optional AC to DC power adapter (+12V, 60W)
- Vibration:
 - IEC 68 2-64 (w/ HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
 - 2Grms @ sine, 5~500Hz, 1hr/axis (CFast operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G@wall mount, half sine, 11ms
- Operating temperature: -5°C to 50°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing
- Dimension: 422.6(W) x 350.6(H) x 73.2(D)mm
- Weight: 6.15Kg

Certifications

- CE approval
- FCC Class A

OS Support Lists

- Windows 8 32bit/64bit
- Windows 7 32bit/64bit
- WinCE 7.0

Ordering Information

Barebone

- **OPPC 1940HT-J1900 (P/N: TBD)**
19" SXGA LED backlight touch Panel PC with Intel® Celeron™ J1900, 2.0GHz, 1000 nits, touch screen, 2GB DDR3L with 2x RS232/422/485

Options

- **12V, 60W AC/DC power adapter w/o power cord (P/N: 7400060017X00)**



Main Features

- Intel® Celeron® N2807
- Wide range DC input from 12~36V
- Front bezel compliant with IP54
- Tempered glass
- Fan Less
- Video over Ethernet extender (HDBaseT)
- Supports W-Fi, GPS, and 3G module

Product Overview

TPPC 2210 is 21.5" 16:9 LCD with resolutions to 1920 x 1080 (Full HD) and industrial motherboard making it the perfect "AIO" In transit panel PC solution. VESA mount Kit (optional) design for easy installation almost any location, including retail outlets, supermarkets, train station, airports and Bus. It is compliant to in-vehicle industrial standard, like E/e-Mark.

Support Daisy Chain HDMI over Ethernet of HDBaseT technology, it allows multimedia signal easily to use Cat5e/Cat6 cable to extend TV display UP to 60M or longer distance It can connect to maximum eight displays, making the whole system more flexible on applications.

Specifications

LCD Panel

- LCD size: 21.5", 16:9
- Resolution: full HD, 1920 x 1080
- Luminance: 1000 cd/m²
- Contrast ratio: 3000
- LCD color: 16.7M
- Viewing angle: 89 (U), 89 (D), 89 (L), 89 (R)
- Backlight: LED

CPU Support

- Intel® Celeron® processor N2807 1.58GHz

Chipset

- SoC (codenamed Intel® Baytrail-M)

Graphics

- Intel® HD Graphics

Main Memory

- 1 x 204-pin SO-DIMM socket, Supports DDR3L 1333MHz non-ECC, un-buffered memory up to 4GB

I/O Interface

- 1 x 12~36V, 6-pin (Power, Ignition, Ground)
- 2 x USB2.0
- 2 x LAN
- 1 x COM port

- 1 x Power button
- 1 x Video over Ethernet extender (Optional, TPPC 2210T)

Audio

- AC'97 codec: Realtek ALC622
- Two 2W Speakers

Ethernet

- 2 x LAN chip: Realtek RTL8111G LAN Chip, support Gigabit LAN
- Ethernet interface: 10/100/1000 Based-Tx Ethernet compatible

Storage

- 1 x SATA 2.5"
- 1 x mSATA (share with mini-PCIe)

Expansion

- 1 x mini-PCIe slot (Full size)
- 1 x mini-PCIe slot (Half size)


Environment

- Operating temperature: -10°C to 40°C
- Storage temperature: -20°C to 60°C
- Humidity: 10 to 90% (non-condensing)

Certification

- CE
- FCC
- E/e-Mark

Dimension Drawing

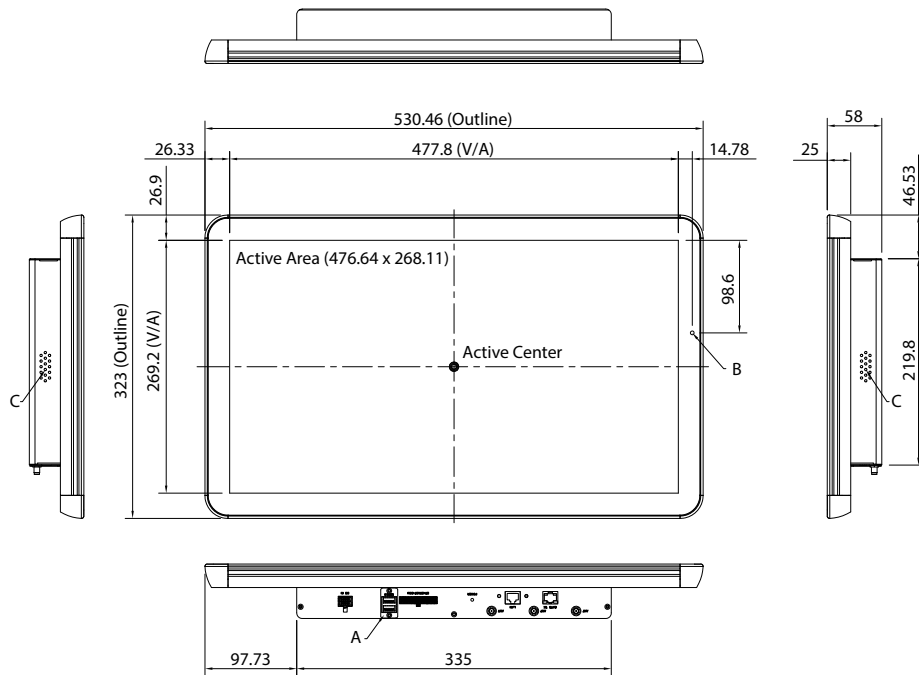

Operating System

- Win7/WES7/Win8/WE8S/Win10/Linux

Mechanical

- Color: Pantone Black C
- Enclosure: Aluminum and Iron
- Mounting: support VESA75/100/200mm
- Ingress protection: Front bezel IP54
- Dimension: 530.46mm x 323mm x 58mm
- Weight: 7kg

Ordering Information

- **TPPC 2210T (P/N: 10ID0221000X0)**
With Video over Ethernet extender
- **TPPC 2210 (P/N: 10ID0221001X0)**
W/o Video over Ethernet extender



Main Features

- 21.5" full-HD TFT LCD panel
- Wide range DC input from 12~36V
- Front bezel compliant with IP54
- Tempered glass
- Video over Ethernet extender and Daisy Chain

Product Overview

TPPD 2200 is 21.5" 16:9 LCD with resolutions up to 1920 x 1080 (Full HD) industrial display. It is a video over Ethernet receiver and extender. VESA mount Kit (Optional) design for easy installation in almost any location, including retail outlets, supermarkets, train station, airports and Bus. It is compliant to in-vehicle industrial standard, like E/e-Mark.

Support Daisy Chain HDMI over Ethernet of HDBaseT technology, it allows multimedia signal easily using Cat5e/Cat6 cable to extend TV display Up to 60M or longer distance. It can connect to maximum eight displays, making the whole system more flexible on applications.

Specifications

LCD Panel

- LCD size: 21.5", 16:9
- Resolution: full HD, 1920 x 1080
- Luminance: 1000 cd/m²
- Contrast ratio: 3000
- LCD color: 16.7M
- Viewing angle: 89 (U), 89 (D), 89 (L), 89 (R)
- Backlight: LED

I/O Interface

- 1 x 12~36V, 6-pin (Power, Ignition, Ground)
- 1 x Video over Cat5 Receiver Input
- 1 x Video over Cat5 Extender Output

Environment

- Operating temperature: -10°C to 40°C
- Storage temperature: -20°C to 60°C
- Humidity: 10 to 90% (non-condensing)


Certification

- CE
- FCC
- E/e-Mark

Mechanical

- Color: Pantone Black C
- Enclosure: Aluminum and Iron
- Mounting: support VESA75/100/200mm
- Ingress protection: Front bezel IP54
- Dimension: 530.46mm x 323mm x 58mm
- Weight: 7kg

Dimension Drawing

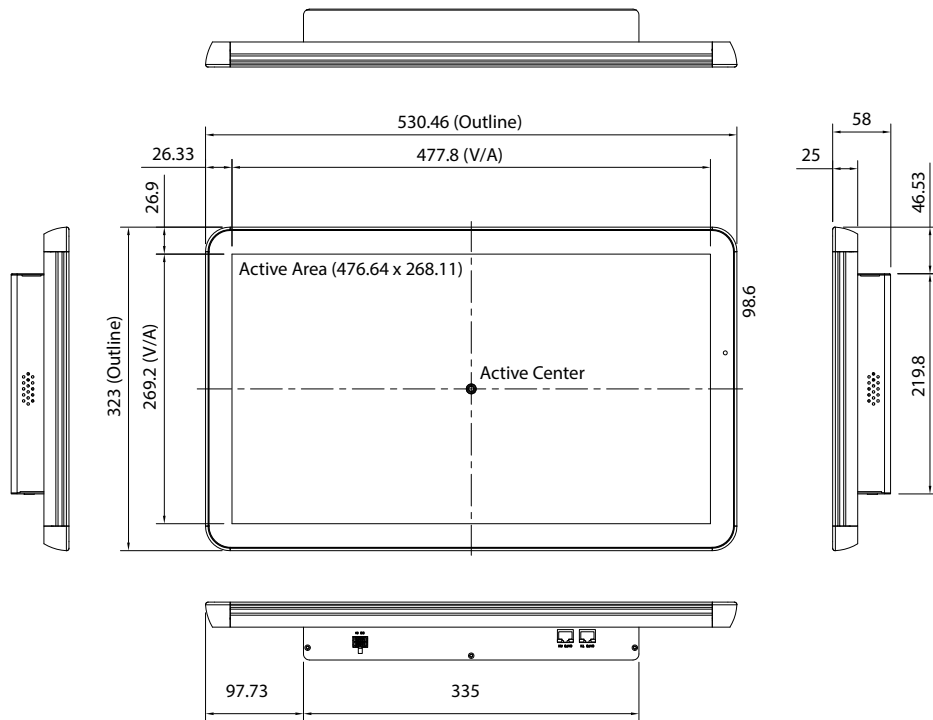

Ordering Information

- **TPPD 2200 (P/N: 10ID0220000X0)**
With video over Ethernet extender and daisy chain



Main Features

- 16:9 8" WVGA marine panel computer
- Intel® Atom™ E3845, Quad Core, 1.91GHz
- 8" PCAP touch screen with AR coating
- 4 Gigabit EtherNet/mini DisplayPort for external monitor
- 1 USB 2.0, 1 USB 3.0
- 1 RJ45 output for RS232/422/485
- DDR3L 4GB/ M.2 SATA 128GB
- IP65 compliant front panel
- Built in 24VDC power input
- Mounting support: flush/VESA 75mm x 75mm
- IEC-60945 maritime standards compliance

Product Overview

PPC-080T-BT-01 8-inch panel computer features the Intel® Atom™ E3845 processor with low power consumption and deliver a reliable, durable, high-performance platform of wide versatility for use in maritime and offshore environments. The panel PC has a touch screen LCD panel with 800 x 480 (WVGA) resolution and 600-nit brightness. The front panel which adopts a flush panel design and has IP65 front panel. It offers a projected-capacitive, glove-friendly multi-touch screen for outdoor applications.

PPC-080T-BT-01 has a RJ45 output for RS-232/422/485, four gigabit EtherNet LAN ports, two USB posts, and also comes with a mini DisplayPort for external monitor, allowing you to extend the screen size and reduce the total cost of system development. The PPC-080T-BT series panel computers are designed with a wide -25°C to 70°C temperature range, supports 24VDC power input and come with a minimalistic and fanless enclosure designed, and satisfy IEC-60945 maritime standards compliance.

Specifications

Panel

- LED size: 8", 16:9
- Resolution: WVGA 800 x 480
- Luminance: 600cd/m²
- Contrast ratio: 600
- LCD color: 16.2M
- Viewing angle: 60(U), 60(D), 70(L), 70(R)
- Backlight: LED

Touch Screen

- Projected capacitive (flush panel type)
- Light transmission: 89%
- Interface: USB
- With AR coating

System

- CPU: onboard Intel® Atom™ processor E3845, 1.91 GHz, 2M L2 Cache
- BIOS AMI BIOS
- System memory: 1x 204-pin DDR3L SO-DIMM socket, 4GB DDR3L (default), support up to 4GB DDR3L-1067/1333, non-ECC and un-buffered
- Storage device
 - 1x SATA connector, support SATA 3Gb/s and SATA 6Gb/s
 - 1x SATA M.2 connector, 128G M.2 SATA (default)
- Graphics: Intel® HD Graphics

- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)
- H/W status monitor: monitoring system temperature, and voltage
- Backlight control
 - Control button: increase brightness, decrease brightness, backlight on/off
 - Auto dimming function can be adjust by ambient light sensor
 - Panel backlight can be controlled by software with 45 steps, dimming range from 0% to 100%


Rear I/O

- EtherNet: 4x RJ45
- 2nd DisplayPort: 1x mini DisplayPort
- USB: 1x USB 2.0, 1x USB 3.0
- COM #1: 1x RJ45 output for RS232/422/485
- Power status LED
- DC power input connector: 3-pin Phoenix terminal blocks

EtherNet

- LAN chip: 4x Intel® I210-IT Gigabit LAN
- EtherNet interface: 10/100/1000 Mbps
- Support wake up on LAN

Dimension Drawing

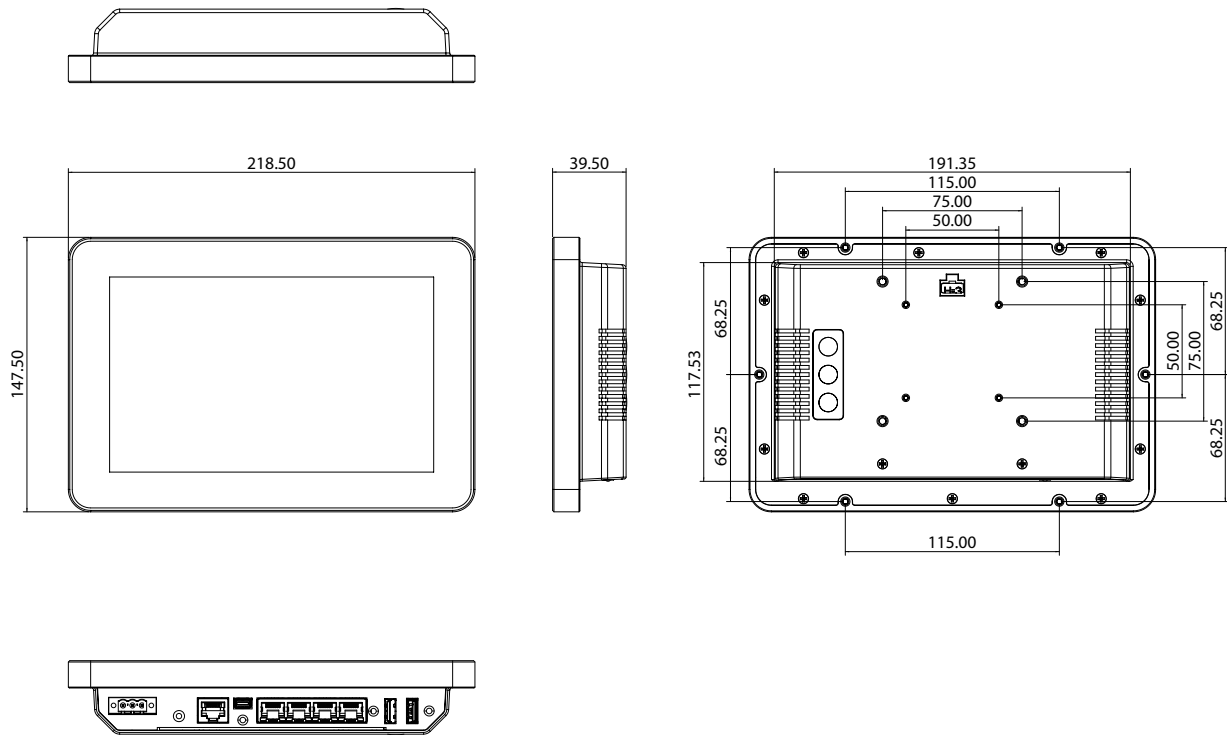

Power Requirements

- Input voltage: 24VDC
- Reverse polarity protection
- Galvanic isolated
- Power consumption: 13W to 25W

Mechanical & Environment

- Fanless system design
- Color
 - Pantone black RAL9005, powder painting for aluminum front bezel
 - Pantone black RAL9005 for backlight button membrane
- IP protection
 - IP65 front bezel
 - IP20 back system
- Mounting: flush/VESA 75mm x 75mm
- Vibration
 - 1.15Grms @ random condition, 1~200Hz, 1.5hr/axis (operating/non-operating)
- Shock
 - IEC 68 2-27
 - 20G @ wall mount, half sine, 11ms
- Operating temperature: -25°C to 70°C
- Storage temperature: -25°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing
- Dimension: 218.5 x 147.5 x 39.5 mm
- Weight: 3 KG

Certifications

- CE approval
- FCC Class A
- IEC-60945 maritime standards compliance

Ordering Information

Barebone

- **PPC-080T-BT-01 (P/N: 10M20080T00X0)**
8" WVGA LED backlight touch panel PC, Intel® Atom™ E3845 1.91GHz, touch screen, 4GB DDR3L, 128G M.2 SATA, 1x RJ45 output for RS23/422/485, brightness adjustment buttons



Main Features

- 16:9 12" WXGA marine panel computer
- Intel® Atom™ E3845, Quad Core, 1.91GHz
- 12" PCAP touch screen with AR coating
- 4 Gigabit EtherNet/mini DisplayPort for external monitor
- 1 USB 2.0, 1 USB 3.0
- 1 RJ45 output for RS232/422/485
- DDR3L memory/M.2 SATA storage
- 1 swappable SSD Tray for 2.5" SSD
- IP65 compliant front panel
- Built-in 24VDC power input
- Mounting support: flush/VESA 75mm x 75mm
- IEC-60945 maritime standards compliance

Product Overview

PPC-120T-BT-01/02 12-inch panel computer features the Intel® Atom™ E3845 processor with low power consumption and deliver a reliable, durable, high-performance platform of wide versatility for use in maritime and offshore environments. The panel PC has a touch screen LCD panel with 1280 x 800 (WXGA) resolution and 500-nit brightness. The front panel which adopts a flush panel design and has IP65 front panel. It offers a projected-capacitive, glove-friendly multi-touch screen for outdoor applications.

PPC-120T-BT-01/02 has a RJ45 output for RS-232/422/485, four gigabit EtherNet LAN ports, two USB posts, and also comes with a mini DisplayPort for external monitor, allowing you to extend the screen size and reduce the total cost of system development. The PPC-120T-BT series panel computers are designed with a wide -25°C to 70°C temperature range, supports 24VDC power input and come with a minimalistic and fanless enclosure designed, and satisfy IEC-60945 maritime standards compliance.

Specifications

Panel

- LED size: 12", 16:9
- Resolution: WXGA 1280 x 800
- Luminance: 500cd/m2
- Contrast ratio: 1000
- LCD color: 16.2M
- Viewing angle: 88(U), 88(D), 88(L), 88(R)
- Backlight: LED

Touch Screen


- Projected capacitive (flush panel type)
- Light transmission: 89%
- Interface: USB
- With AR coating

System

- CPU: onboard Intel® Atom™ processor E3845, 1.91 GHz, 2M L2 Cache
- BIOS AMI BIOS
- System memory
 - PPC-120T-BT-01: 1x 204-pin DDR3L SO-DIMM socket, 4GB DDR3L (default), support up to 4GB DDR3L-1067/1333, non-ECC and un-buffered
 - PPC-120T-BT-02: 1x 204-pin DDR3L SO-DIMM socket, 2GB DDR3L

- (default), support up to 4GB DDR3L-1067/1333, non-ECC and un-buffered
- Storage device
 - PPC-120T-BT-01:
 - 1x SATA M.2 connector, 128G M.2 SATA (default)
 - 1x SATA connector, support SATA 3Gb/s and SATA 6Gb/s
 - 1x swappable SSD tray for 2.5" SSD
 - PPC-120T-BT-02:
 - 1x SATA M.2 connector, 32G M.2 SATA (default)
 - 1x SATA connector, support SATA 3Gb/s and SATA 6Gb/s
 - 1x swappable SSD tray for 2.5" SSD
- Graphics: Intel® HD Graphics
- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)
- H/W status monitor: monitoring system temperature, and voltage
- Backlight control
 - Control button: increase brightness, decrease brightness, backlight on/off
 - Auto dimming function can be adjust by ambient light sensor
 - Panel backlight can be controlled by software with 45 steps, dimming range from 0% to 100%

Dimension Drawing

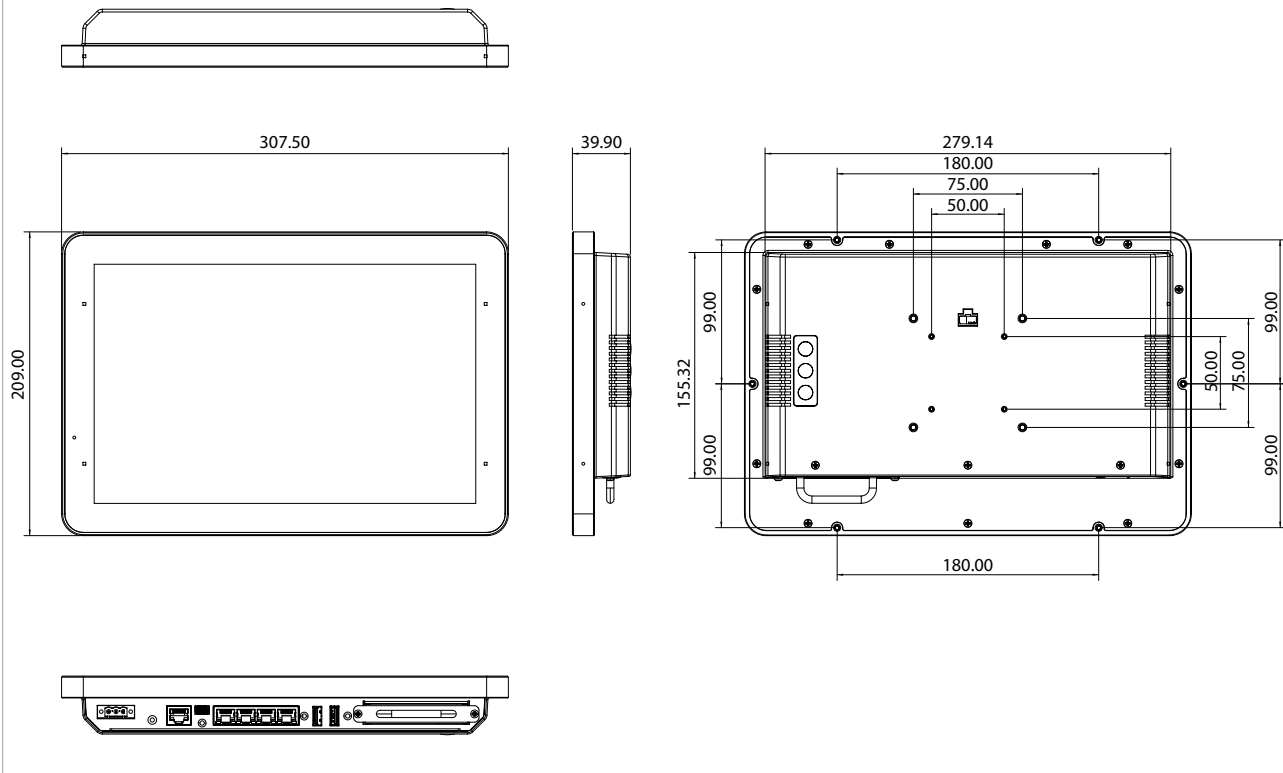

Rear I/O

- EtherNet: 4x RJ45
- 2nd DisplayPort: 1x mini DisplayPort
- USB: 1x USB 2.0, 1x USB 3.0
- COM #1: 1x RJ45 output for RS232/422/485
- Power status LED
- DC power input connector: 3-pin Phoenix terminal blocks

EtherNet

- LAN chip: 4x Intel® I210-IT Gigabit LAN
- EtherNet interface: 10/100/1000 Mbps
- Support wake up on LAN

Power Requirements

- Input voltage: 24VDC
- Reverse polarity protection
- Galvanic isolated
- Power consumption: 22W to 30W

Mechanical & Environment

- Fanless system design
- Color
 - Pantone black RAL9005, powder painting for aluminum front bezel
 - Pantone black RAL9005 for backlight button membrane
- IP protection
 - IP65 front bezel
 - IP20 back system
- Mounting: flush/VESA 75mm x 75mm
- Vibration
 - 1.15Grms @ random condition, 1~200Hz, 1.5hr/axis (operating/non-operating)

- Shock
 - IEC 68 2-27
 - 20G @ wall mount, half sine, 11ms
- Operating temperature: -25°C to 70°C
- Storage temperature: -25°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing
- Dimension: 307.5 x 209 x 39.9 mm
- Weight: 5 KG

Certifications

- CE approval
- FCC Class A
- IEC-60945 maritime standards compliance

Ordering Information

Barebone

- **PPC-120T-BT-01 (P/N: 10M20120T00X0)**
12" WXGA LED backlight touch panel PC, Intel® Atom™ E3845
1.91GHz, touch screen, 4GB DDR3L, 128G M.2 SATA, 1x RJ45 output
for RS23/422/485, brightness adjustment buttons
- **PPC-120T-BT-02 (P/N: 10M20120T01X0)**
12" WXGA LED backlight touch panel PC, Intel® Atom™ E3845
1.91GHz, touch screen, 2GB DDR3L, 32G M.2 SATA, 1x RJ45 output for
RS23/422/485, brightness adjustment buttons



Main Features

- 16:9 24" Full HD Marine Panel Computer
- Intel® Core™ i5-4300U, Dual Core, 1.9 GHz
- 24" PCAP touch screen with AR coating
- 4 Gigabit Ethernet/1x DVI-I port for connecting secondary display
- 2 USB 2.0, 2 USB 3.0
- 1 RS232/422/485 isolated
- DDR3L 4GB/M.2 SATA 128GB
- IP65 compliant front panel
- Full range AC + 24VDC power inputs
- Mounting support: flush/VESA 100mm x 100mm
- IEC-60945 maritime standards compliance

Product Overview

PPC-240T-HW-01 24-inch panel computer features the Intel® Core i5-4300U processor with low power consumption and deliver a reliable, durable, high-performance platform of wide versatility for use in maritime and offshore environments. The panel PC has a touch screen LCD panel with 1920 x 1080 (Full HD) resolution and 300-nit brightness. The front panel which adopts a flush panel design and has IP65 front panel. It offers a projected-capacitive, glove-friendly multi-touch screen for outdoor applications.

PPC-240T-HW-01 has an Isolated RS-232/422/485 port, four Gigabit Ethernet LAN ports, four USB posts, and also comes with a DVI-I port for connecting secondary display, allowing you to extend the screen size and reduce the total cost of system development. The PPC-240T-HW series panel computers are designed with a wide -25°C to 70°C temperature range, supports full range 110/230VAC or 24VDC power inputs and come with a minimalistic and fanless enclosure designed, and satisfy IEC-60945 maritime standards compliance.

Specifications

Panel

- LED size: 24", 16:9
- Resolution: Full HD 1920 x 1080
- Luminance: 300cd/m²
- Contrast ratio: 5000
- LCD color: 16.7M
- Viewing angle: 89(U), 89(D), 89(L), 89(R)
- Backlight: LED

Touch Screen

- Projected capacitive (flush panel type)
- Light transmission: 91%
- Interface: USB
- With AR coating

System

- CPU: onboard Intel® Core™ processor i5-4300U, 1.9GHz, 3M Cache
- BIOS AMI BIOS
- System memory: 2x 204-pin DDR3L SO-DIMM socket, 4GB DDR3L (default), support up to 16GB DDR3L-1066/1333, non-ECC and un-buffered
- Storage device
 - 1x SATA M.2 connector, 128G M.2 SATA (default)
 - 1x mini-PCIe connector
- Graphics: Intel® HD Graphics

- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)
- H/W status monitor: monitoring system temperature, and voltage
- Control buttons
 - Poweron/off, reset, brightness
- Backlight control
 - Auto dimming function can be adjust by ambient light sensor
 - Panel backlight can be controlled by software, dimming range from 0% to 100%


Rear I/O

- Ethernet: 4x RJ45
- 2nd display port: 1x DVI-I port
- USB: 2x USB 2.0, 2x USB 3.0
- COM #1: 1x RS232/422/485
- Power status/ HDD status LEDs
- AC power input connector: IEC 60320 C14 connector
- DC power input connector: 3-Pin Phoenix terminal blocks

EtherNet

- LAN chip: 2x Intel® I210-IT Gigabit LAN + 2x Intel® 82574 Gigabit LAN
- Ethernet interface: 10/100/1000 Mbps
- Support wake up on LAN

Dimension Drawing

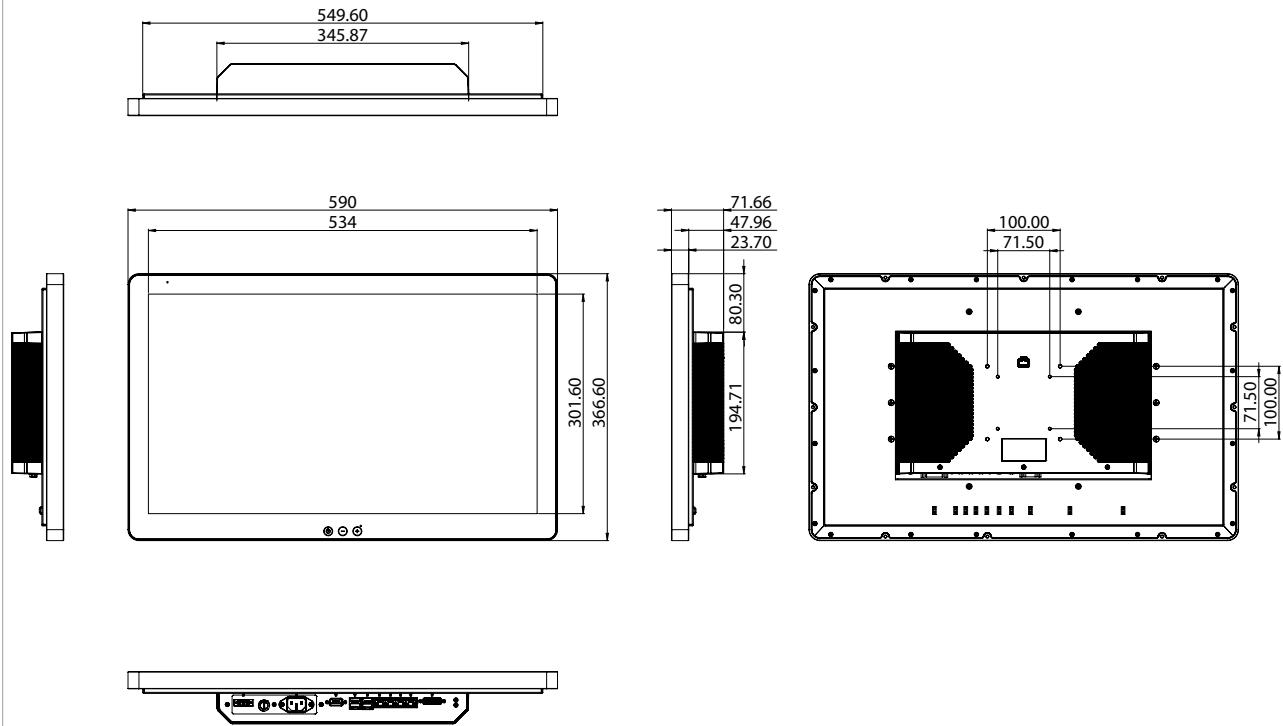

Power Requirements

- ♦ AC power input
 - Input voltage: 110/230VAC
 - Power consumption: 28W to 55W
 - ♦ DC power input
 - Input voltage: 24VDC
 - Reverse polarity protection
 - Galvanic isolated
- * Note: only one power source (AC or DC) to be connected. No failover functionality.

Mechanical & Environment

- ♦ Fanless system design
- ♦ Color
 - Pantone black RAL9005, powder painting for aluminum front bezel
 - Pantone black RAL9005 for backlight button membrane
- ♦ IP protection
 - IP65 front bezel
 - IP20 back system
- ♦ Mounting: flush/VESA 100mm x 100mm
- ♦ Vibration
 - Compliance with EN60945 protected b
 - Sweep 2 Hz – 13.2 Hz at ± 1 mm, 13.2 Hz – 100 Hz at 7m/s^2 and for 2 h on each resonance ($Q > 5$), 2h on one resonance/observed frequency ($Q < 5$), otherwise ($Q = 0$) 2 h at 30 Hz in all three axes, 12 minutes/axis

- ♦ Shock
 - IEC 68 2-27
 - 20G @ wall mount, half sine, 11ms
- ♦ Operating temperature: -25°C to 70°C
- ♦ Storage temperature: -25°C to 75°C
- ♦ Operating humidity: 10%~90% relative humidity, non-condensing
- ♦ Dimension: 590 x 366.6 x 71.66 mm
- ♦ Weight: 9 KG

Certifications

- ♦ CE approval
- ♦ FCC Class A
- ♦ CCC approval
- ♦ IEC-60945 maritime standards compliance

Ordering Information

Barebone

- ♦ **PPC-240T-HW-01 (P/N: 10M20240T00X0)**
24" Full HD LED backlight touch panel PC, Intel® Core™ i5-4300U 1.9 GHz, touch screen, 4GB DDR3L, 128G M.2 SATA, 1x RS23/422/485, PCAP control buttons

Headquarters

NEXCOM International Co., Ltd.

9F, No.920, Chung-Cheng Rd., ZhongHe District, New Taipei City, 23586, Taiwan, R.O.C.
Tel: +886-2-8226-7786
Fax: +886-2-8226-7782
www.nexcom.com

America

USA

NEXCOM USA

2883 Bayview Drive,
Fremont CA 94538, USA
Tel: +1-510-656-2248
Fax: +1-510-656-2158
Email: sales@nexcom.com
www.nexcom.com

Asia

Taiwan

NEXCOM Intelligent Systems

Taipei Office

13F, No.920, Chung-Cheng Rd.,
ZhongHe District,
New Taipei City, 23586, Taiwan, R.O.C.
Tel: +886-2-8226-7796
Fax: +886-2-8226-7792
Email: sales@nexcom.com.tw
www.nexcom.com.tw

NEXCOM Intelligent Systems

Taichung Office

16F, No.250, Sec. 2, Chongde Rd.,
Beitun District,
Taichung City 406, R.O.C.
Tel: +886-4-2249-1179
Fax: +886-4-2249-1172
Email: sales@nexcom.com.tw
www.nexcom.com.tw

Japan

NEXCOM Japan

9F, Tamachi Hara Bldg.,
4-11-5, Shiba Minato-ku,
Tokyo, 108-0014, Japan
Tel: +81-3-5419-7830
Fax: +81-3-5419-7832
Email: sales@nexcom-jp.com
www.nexcom-jp.com

China

NEXCOM China

5F, Bldg. 4, No. 7 Fengxian middle Rd.,
Haidian Disitric,
Beijing, 100094, China
Tel: +86-10-5704-2680
Fax: +86-10-5704-2681
Email: sales@nexcom.cn
www.nexcom.cn

NEXCOM Shanghai

Room 603/604, Bldg. 1, Huiyinmingzun Plaza,
No. 609, Yunlin East Rd.,
Shanghai, 200062, China
Tel: +86-21-5278-5868
Fax: +86-21-3251-6358
Email: sales@nexcom.cn
www.nexcom.cn

NEXCOM Surveillance Technology Corp.

2F, Room 201, Zone B, Guangming Industrial Park,
No. 24, Zhonghua Rd., Longhua New District,
Shenzhen, 518131, China
Tel: +86-755-8364-7768
Fax: +86-755-8364-7738
Email: steveyang@nexcom.com.tw
www.nexcom.cn

NEXCOM United System Service

Room 305, Bldg. A, Jinshajiang West Rd.,
No. 568, Jiading District,
ShangHai, 201803, China
Tel: +86-21-6125-8282
Fax: +86-21-6125-8281
Email: service@nexcom.com.tw
www.nuss.net.cn

NEXGOL

1st Bldg., No. 999 Star Boulevard,
Yongchuan District,
Chongqing, 402160, China
Tel: +86-23-4960-9080
Fax: +86-23-4966-5855
Email: sales@nexgol.com.cn
www.nexcom.cn

Europe

United Kingdom

NEXCOM EUROPE

10 Vincent Avenue,
Crownhill Business Centre,
Milton Keynes, Buckinghamshire
MK8 0AB, United Kingdom
Tel: +44-1908-267121
Fax: +44-1908-262042
Email: sales.uk@nexcom.eu
www.nexcom.eu

Italy

NEXCOM ITALIA S.r.l

Via Lanino 42,
21047 Saronno (VA), Italia
Tel: +39 02 9628 0333
Fax: +39 02 9625 570
Email: nexcomitalia@nexcom.eu
www.nexcomitalia.it